

PHOTOFACT[®] with

CIRCUITRACE[®]

For Supplier Address See PHOTOFACT Index

NOTE

ONLY THOSE PERSONS PROPERLY LICENSED ARE PERMITTED TO MAKE REPAIRS OR ADJUSTMENTS WHICH MAY RESULT IN ILLEGAL OPERATION. (REFER TO FCC RULES AND REGULATIONS PART 95, SUBPARTS C & D.)

The frequency of the transmitter should be checked periodically with a secondary frequency standard to insure proper and legal operation.

Best results will be obtained when adjusting the final RF output circuit if the antenna normally used is connected and the chassis is as nearly in the cabinet as possible.

Connect either 50-ohm dummy load or the normally used antenna system.



MODEL "T" Charlie One

ALIGNMENT INSTRUCTIONS

Suggested Alignment Tools:	L912, L913, L914	GC ELECTRONICS #9300
	T301, T302, T303, T304, T305, T306	#5000, 8290
	All Others	#9440

RECEIVER

Connect an AC VTVM or AF Wattmeter across speaker voice coil.
Adjustments made with 14-volt DC input.
Adjust volume control to obtain suitable reading.

SIGNAL GENERATOR	GEN FREQ	CHANNEL	ADJUST	REMARKS
High side thru .01 uF to Q301 base, low side to ground.	455 KHz, 1000Hz @ 30% modulation, output to obtain suitable reading.	Any	T303,T304, T305,T306	Adjust for maximum.
OSCILLOSCOPE (Response to 30MHz) connect to secondary of L904.		Any	L901,L902 L903,L904	Adjust for maximum. Readjust L901 3 turns Counter-clockwise.
High side thru .01 uF to antenna Jack, low side to ground.	27.115MHz, 1000Hz @ 30% Modulation, output	13	L101,L102, T301,T302	Set Squelch maximum Counter-clockwise. Set Delta switch to center. Adjust for maximum.

TEABERRY MODEL "T" CHARLIE ONE

HOWARD W. SAMS & CO., INC. Indianapolis, Indiana 46206

© 1975 Howard W. Sams & Co., Inc. Printed in U. S. of America 5CY225

RECEIVER ADJUSTMENTS

Connect an AC VTVM or AF Wattmeter across speaker voice coil.
These adjustments made with 14-volt DC input.
Adjust volume control to obtain a suitable reading.

SIGNAL GENERATOR	GEN FREQ	CHANNEL	ADJUST	REMARKS
AGC High side thru .01 uF to antenna jack, low side to ground.	27.115MHz, 1000Hz 30% modulation, output 50,000 uV.	13	R307	Adjust volume control to obtain 00 db. Decrease generator to 50 uV. Adjust so that signal does not drop more than 10db.
SQUELCH RANGE High side thru .01 uF to antenna jack, low side to ground.	27.115MHz, 1000Hz @ 30% modulation, output 250 uV.	13	R508	Set squelch control fully clockwise. Adjust so that squelch just breaks.
"S" METER High side thru .01 uF to antenna jack, low side to ground.	27.115MHz, 1000Hz @ 30% modulation, output 50uV.		R515 R514	Adjust for "0" with signal generator disconnected. Adjust for "S"9 on panel meter.

TRANSMITTER


Connect an RF Wattmeter or 50-ohm, 25-watt dummy load to antenna connector.
Adjustments made with 14-volt DC input.

INDICATOR	ADJUST	REMARKS
OSCILLATOR, MIXER, BUFFER, DRIVER, FINAL RF Wattmeter	L905,L906, L907,L908, L910	Channel selector to Key transmitter. Adjust for maximum.
OUTPUT POWER RF Wattmeter	L912	Key transmitter. Adjust for 3 watts output.
TVI TRAP TV (Ch. 2)	L914	Key transmitter. Adjust for MINIMUM interference on TV.
FINAL INPUT POWER Connect 0-1A DC milliammeter between Q909 collector and PC Board.	L913	Adjust for 5 watts (maximum).


TRANSMITTER ADJUSTMENTS

Connect an RF Wattmeter or 50-ohm, 25-watt dummy load to antenna connector.
Adjustments made with 14-volt DC input.


INDICATOR	ADJUST	REMARKS
AMC Modulation Meter connect to antenna jack.	R520	Inject a 1000Hz 15mV audio signal at mic input. Key transmitter. Adjust for 100% modulation maximum.
RF PANEL METER RF Wattmeter	R516	Key transmitter. Adjust so that panel RF meter agrees with RF wattmeter.

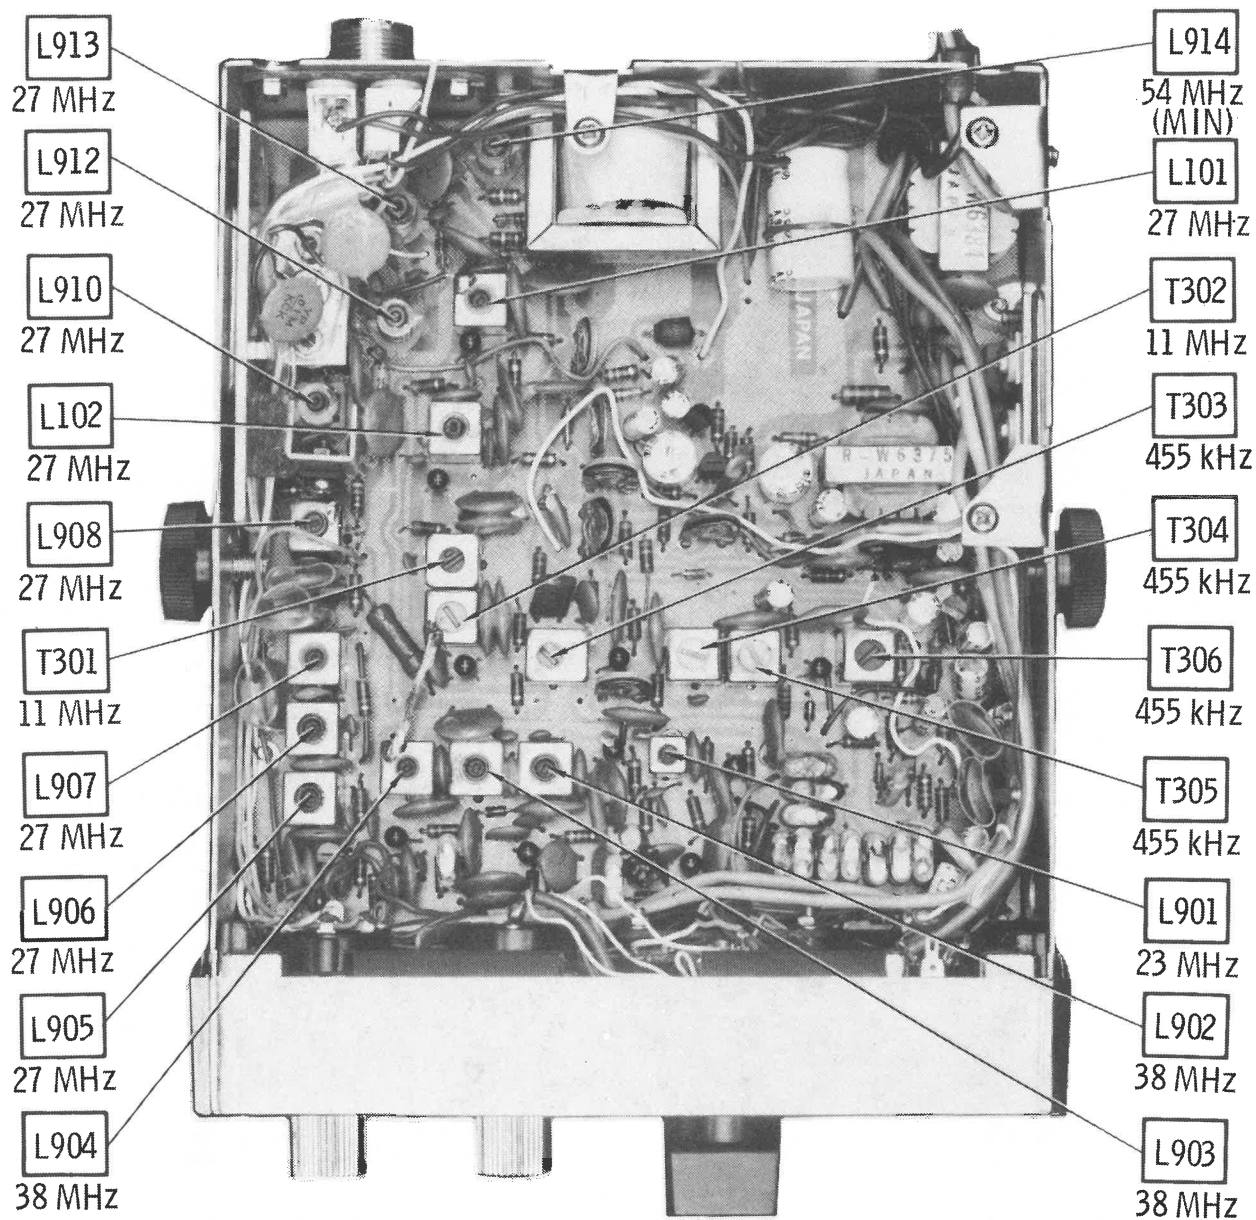


TEABERRY MODEL "T" CHARLIE ONE

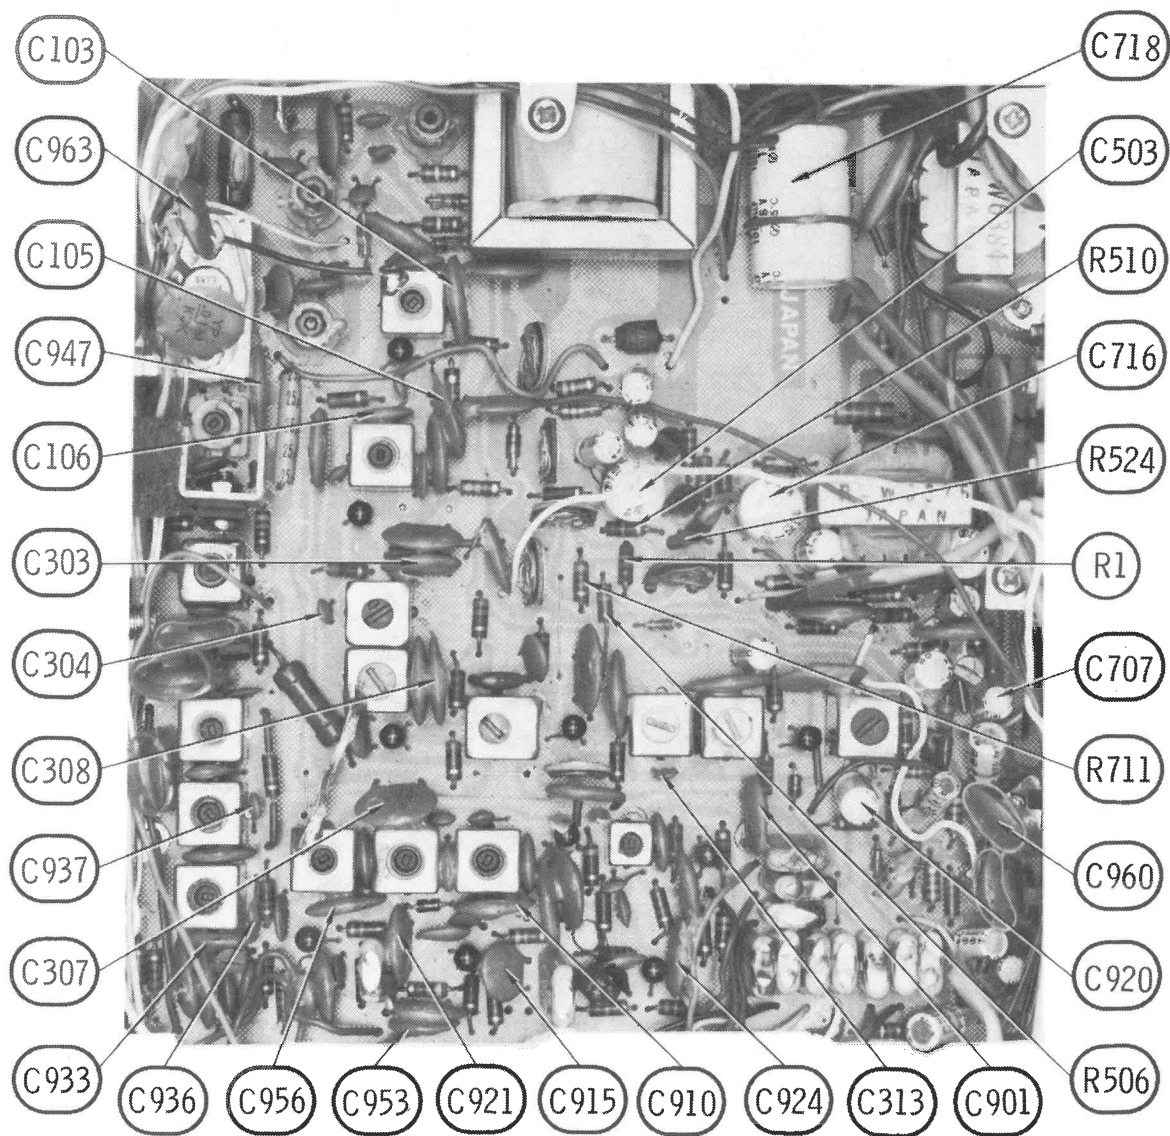



TEABERRY MODEL "T" CHARLIE ONE

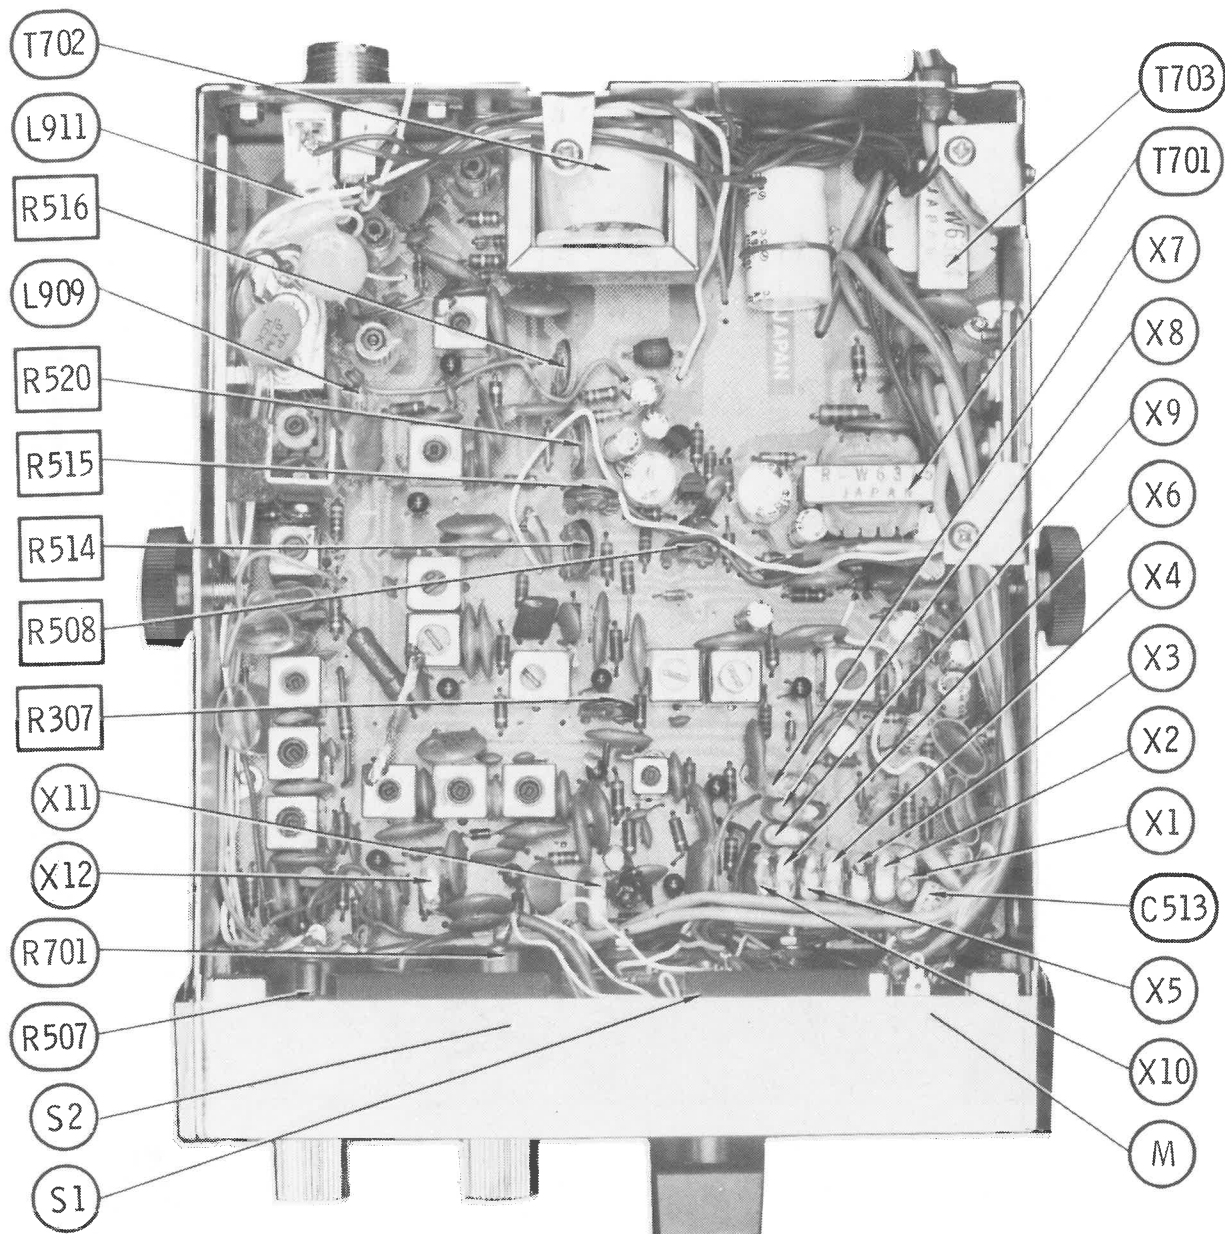


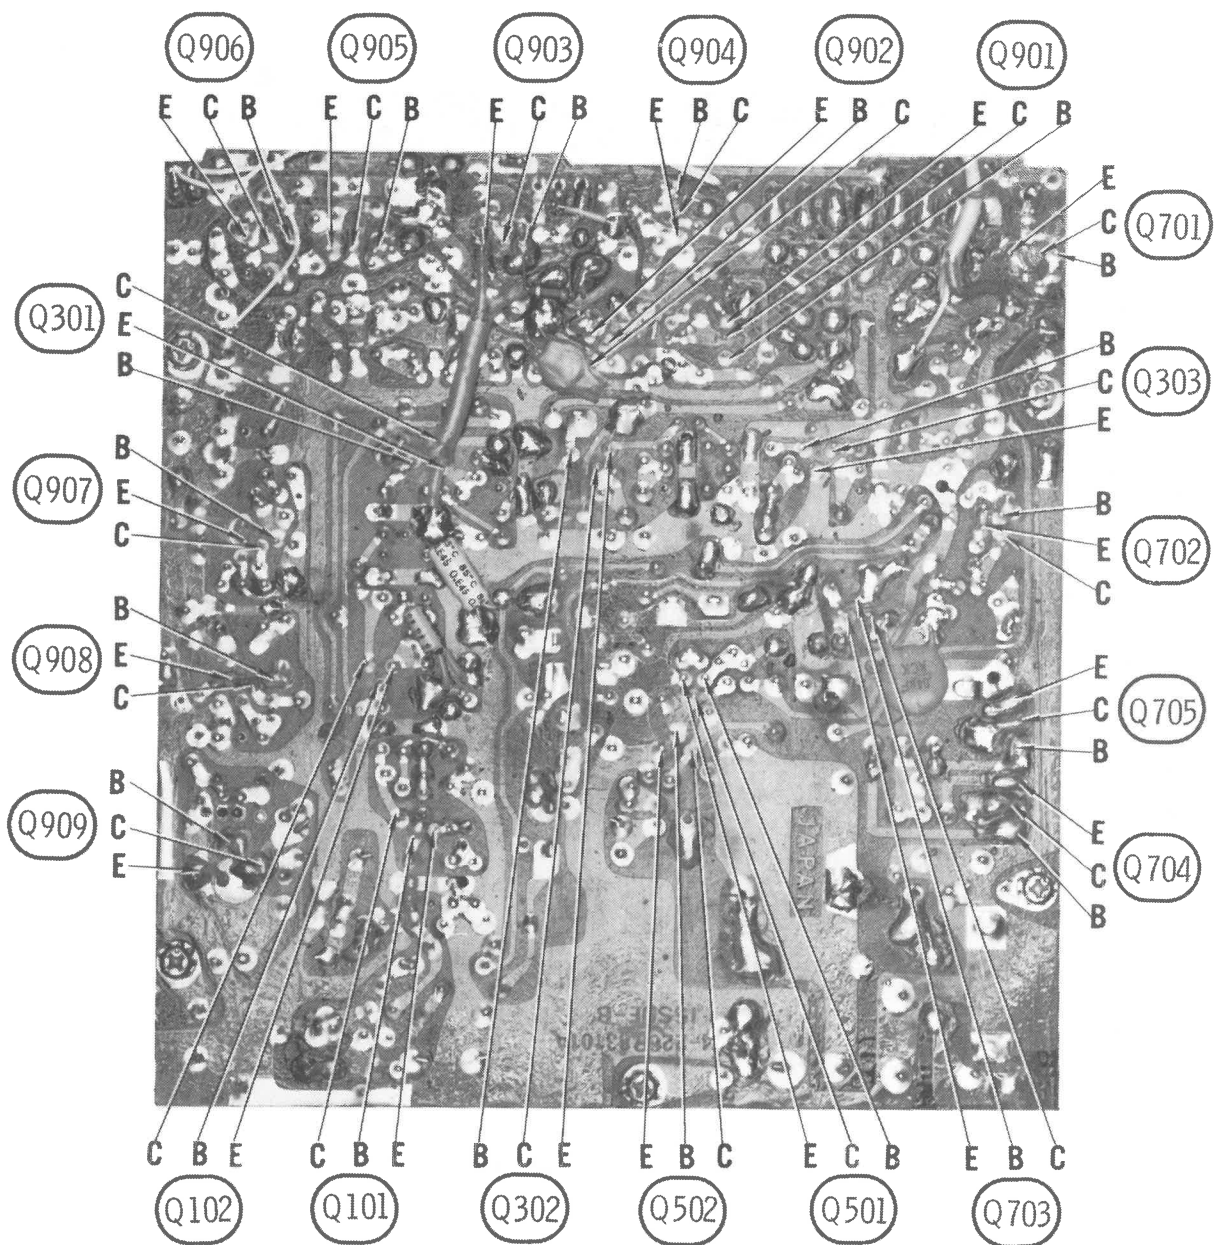


TEABERRY MODEL "T" CHARLIE ONE

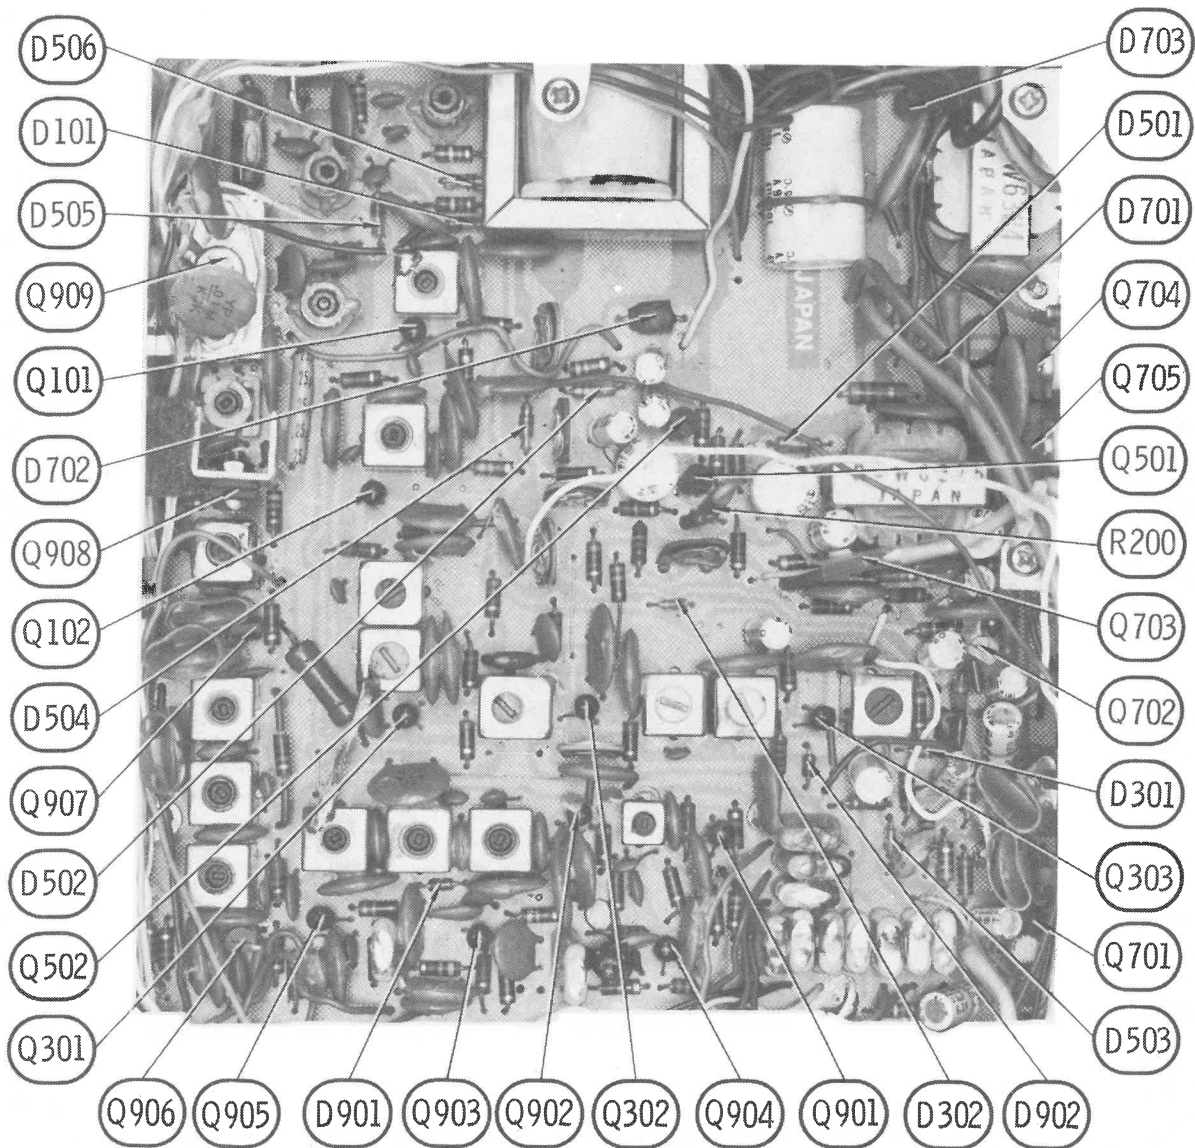


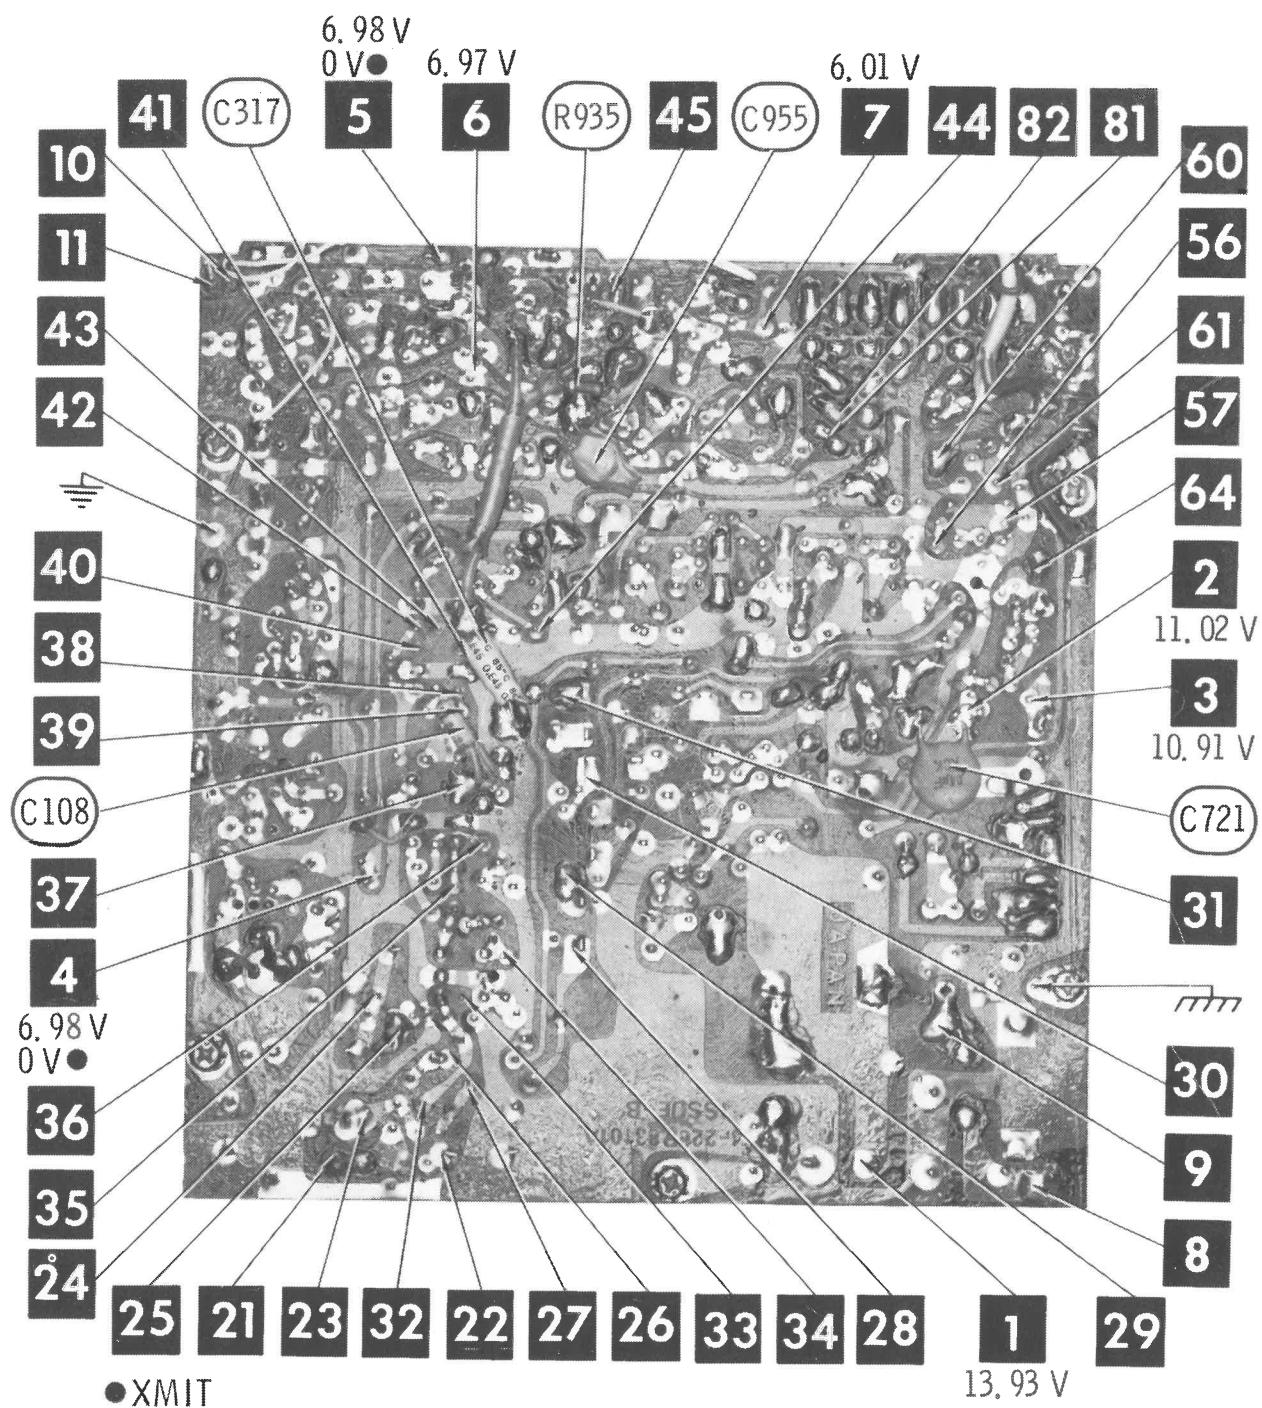

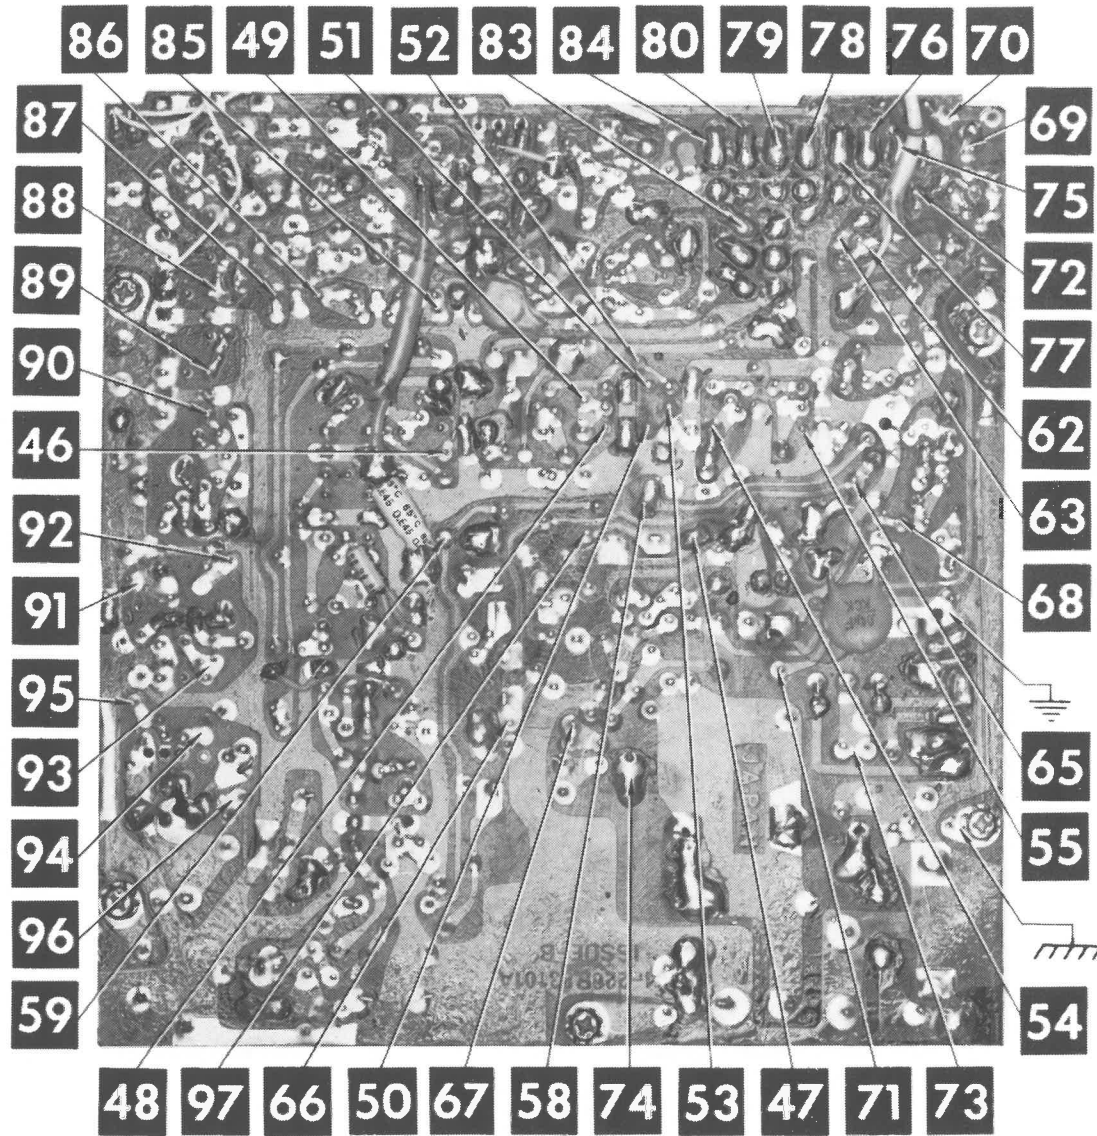


TEABERRY MODEL "T" CHARLIE ONE

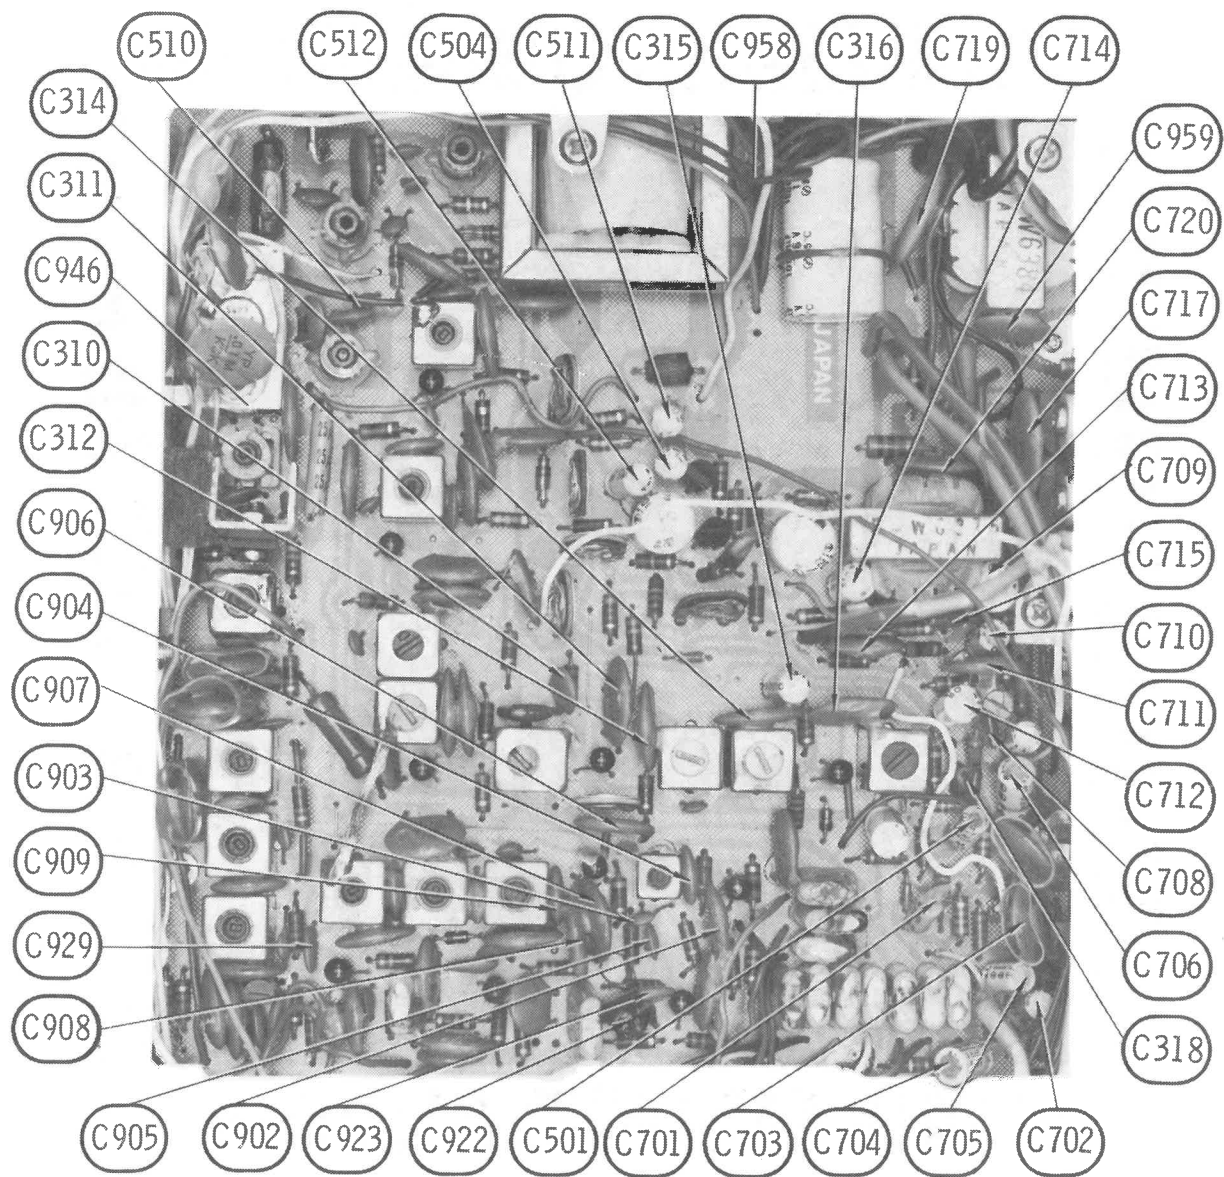

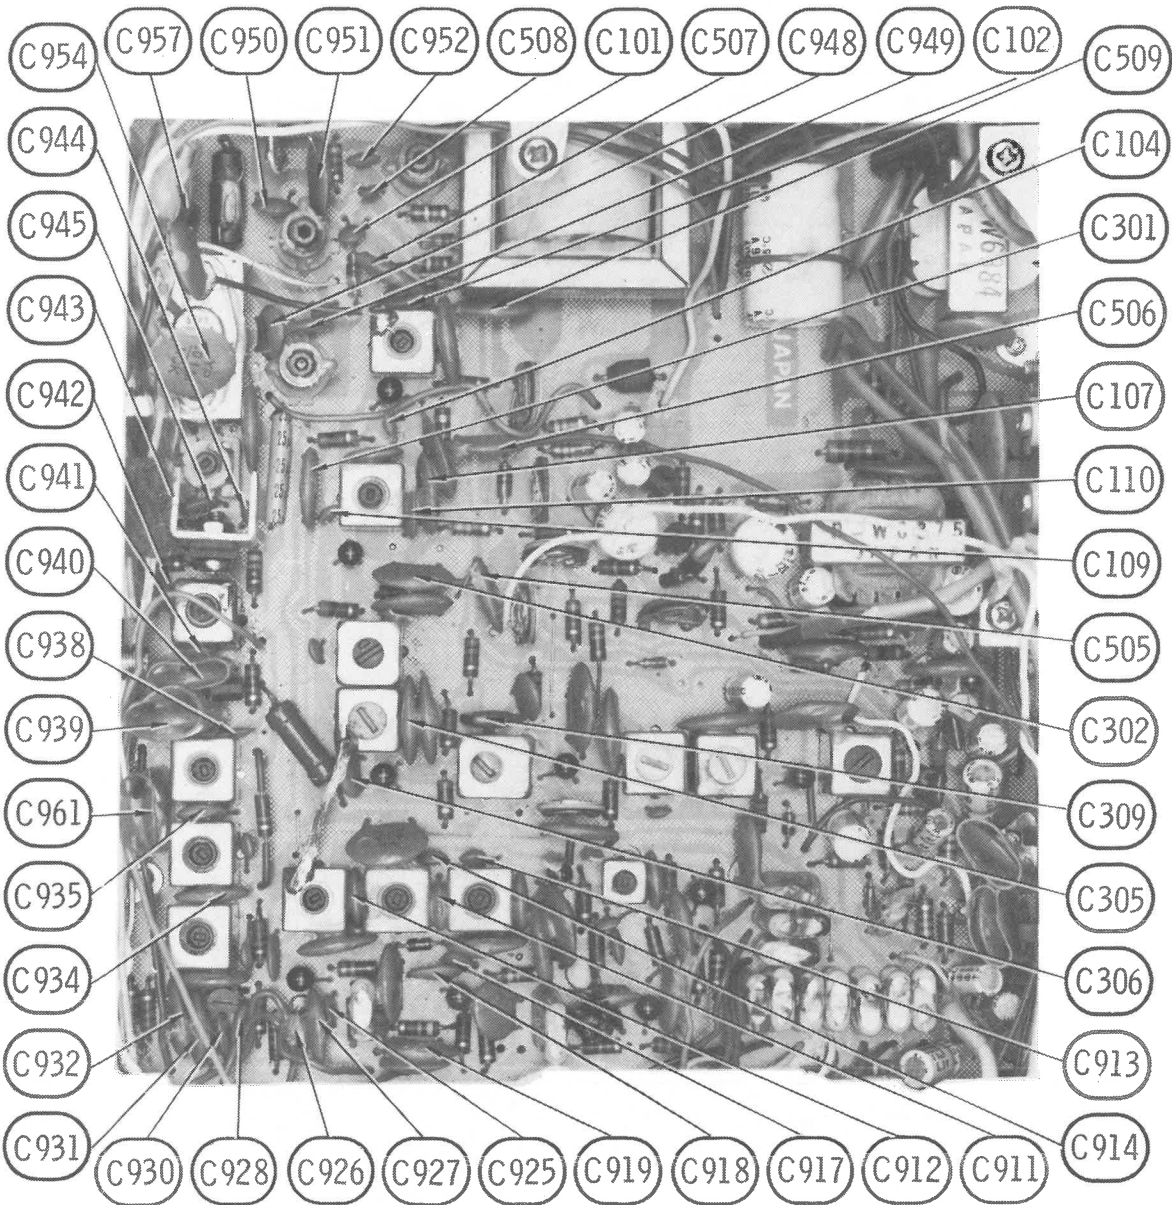

TEABERRY MODEL "T" CHARLIE ONE

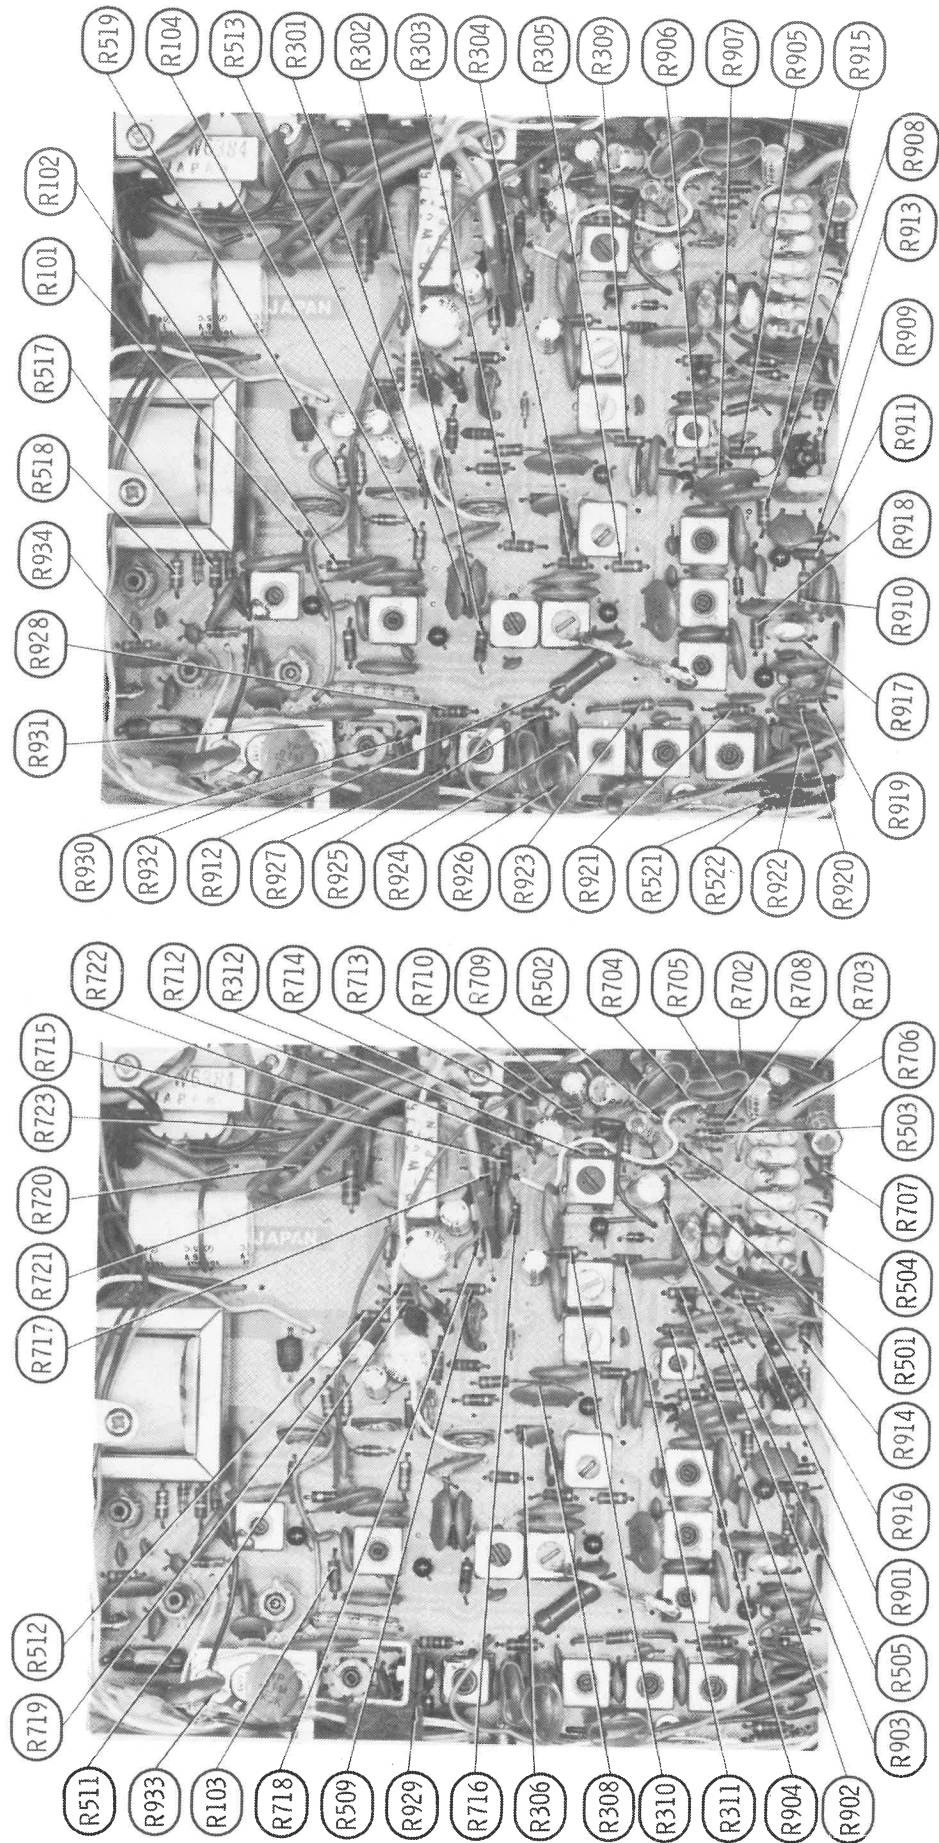

PARTS LIST AND DESCRIPTION

(When ordering parts, state Model, Part Number, and Description.)

WIRING DATA

General-use Hook-up Wire	Use BELDEN No. 8530 (Solid) Available in 12 Colors 8524 (Stranded) Available in 12 Colors
Shielded Antenna Lead	Use BELDEN No. 8214 Lowest-loss (RG-8/U Type) 8237 Low-loss (RG-8/U) 8240 (Solid) Miniature (RG-58/U) 8259 (Stranded) Miniature (RG-58A/U)
Coiled Microphone Cable	Use BELDEN No. 8497 3-Conductor (1 shielded for Press-to-Talk) Neoprene 8491 4-Conductor (2 shielded, 2 unshielded) Neoprene
Ignition Noise Suppression	Use BELDEN No. 7300-Series Spark-Plug Sets
Bonding Strap	Use BELDEN No. 8661 (3/8 inch)

SEMICONDUCTORS (Select replacement transistor for best results)

ITEM No.	TYPE / MFR. No. / PART No.	REPLACEMENT DATA						
		GENERAL ELECTRIC PART No.	INTERNATIONAL RECTIFIER PART No.	MALLORY PART No.	MOTOROLA PART No.	RCA PART No.	SPRAGUE PART No.	SYLVANIA PART No.
D101	1S188	1N60	1N60	PTC206	HEP135	SK3088		ECG 109
D301	1S188	1N60	1N60	PTC206	HEP135	SK3088		ECG 109
D302	1S953	GE-300	D200	PTC214	HEPR0602	SK3100	RT218	ECG 177
D501	1S188	1N60	1N60	PTC206	HEP135	SK3088		ECG 109
D502	1S188	1N60	1N60	PTC206	HEP135	SK3088		ECG 109
D503	1S953	GE-300	D200	PTC214	HEPR0602	SK3100	RT218	ECG 177
D504	1S188	1N60	1N60	PTC206	HEP135	SK3088		ECG 109
D505	1S188	1N60	1N60	PTC206	HEP135	SK3088		ECG 109
D506	1S188	1N60	1N60	PTC206	HEP135	SK3088		ECG 109
D701	1S1209	GE-504A	8D4 or 5A4D	PTC201 or PTC202	HEPR0052	SK3030 or SK3031	RT213 or RT214	ECG 116 or ECG 117
D702	DS130	GE-504A	8D4 or 5A4D	PTC201 or PTC202	HEPR0052	SK3030 or SK3031	RT213 or RT214	ECG 116 or ECG 117
D703	DS130	GE-504A	8D4 or 5A4D	PTC201 or PTC202	HEPR0052	SK3030 or SK3031	RT213 or RT214	ECG 116 or ECG 117
D901	XZ070 7V Zener	GEZD-7.5	Z-1207	PTC504	HEPZ0410	SK3059	RT239	ECG 138
D902	XZ070 7V Zener	GEZD-7.5	Z-1207	PTC504	HEPZ0410	SK3059	RT239	ECG 138
Q101	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q102	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q102	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q102	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q301	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q302	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q302	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q303	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q303	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q501	2SC945TR	GE-20	TR-21	PTC136	HEP728	SK3124	RT102	ECG 123A
Q501	2SC945 (1)	GE-20	(IR)2SC945	PTC136	HEP728	SK3124	RT102	ECG 123A
Q502	2SC945TR	GE-20	TR-21	PTC136	HEP728	SK3124	RT102	ECG 123A
Q502	2SC945 (1)	GE-20	(IR)2SC945	PTC136	HEP728	SK3124	RT102	ECG 123A
Q701	2SC945TR	GE-20	TR-21	PTC136	HEP728	SK3124	RT102	ECG 123A
Q701	2SC945 (1)	GE-20	(IR)2SC945	PTC136	HEP728	SK3124	RT102	ECG 123A
Q702	2SC945TR	GE-20	TR-21	PTC136	HEP728	SK3124	RT102	ECG 123A
Q702	2SC945 (1)	GE-20	(IR)2SC945	PTC136	HEP728	SK3124	RT102	ECG 123A
Q703	2SC945TR	GE-20	TR-21	PTC136	HEP728	SK3124	RT102	ECG 123A
Q703	2SC945 (1)	GE-20	(IR)2SC945	PTC136	HEP728	SK3124	RT102	ECG 123A
Q704	2SC1096 (2)	GE-28	TR-55	PTC110	HEPS5003	SK3054	RT154	ECG 186
Q705	2SC1096 (2)	GE-28	TR-55	PTC110	HEPS5003	SK3054	RT154	ECG 186
Q901	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q901	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q902	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q902	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q903	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q903	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q904	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q904	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q905	2SC930DT	GE-20	TR-24	PTC132	HEP56	SK3039	RT108	ECG 199
Q905	2SC930 (1)	GE-60	TR-24	PTC132	HEP56	SK3018	RT108	ECG 199
Q906	2SC839H	GE-20	TR-24	PTC121	HEP728	SK3018	RT102	ECG 123A
Q906	2SC715 (1)	GE-20	TR-24	PTC139	HEP56	SK3018	RT102	ECG 123A
Q907	2SC1166 (3)	GE-18	TR-63	PTC143	HEP713	SK3024	RT110	ECG 154
Q908	2SC495T (4)	GE-28	TR-50	PTC110	HEP245	SK3054		ECG 184
Q908	2SC495 (1) (4)	GE-28	TR-50	PTC110	HEP245	SK3054		ECG 184
Q909	2SC799 (5)			PTC158		SK3049		ECG 237

(1) Alternate


(2) Rating 10 Watts @ 2 Amps.


(3) Rating 600MW @ 200 Ma.


(4) Rating 5 Watts @ 800 Ma.

(5) Rating 10 Watts @ 3 Amps.

(CONTINUED ON PAGE 122)

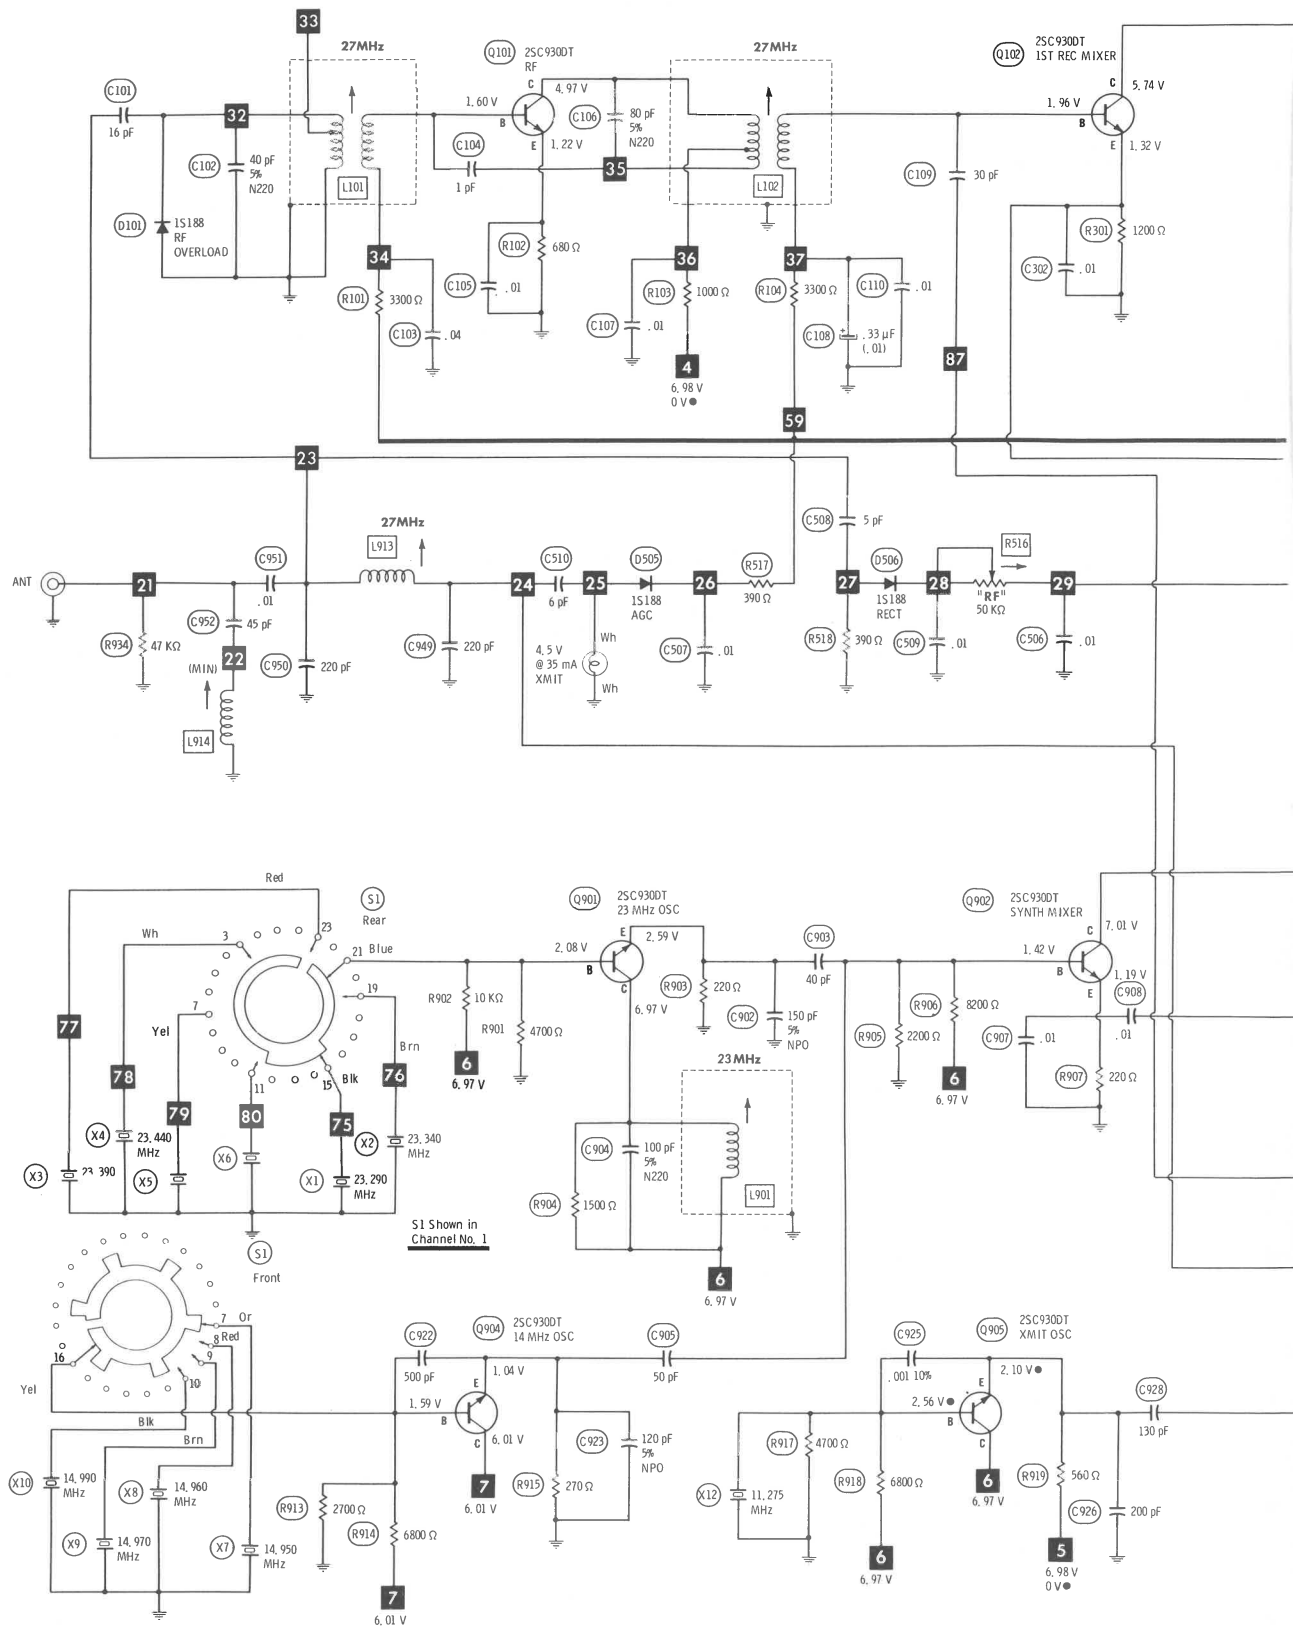

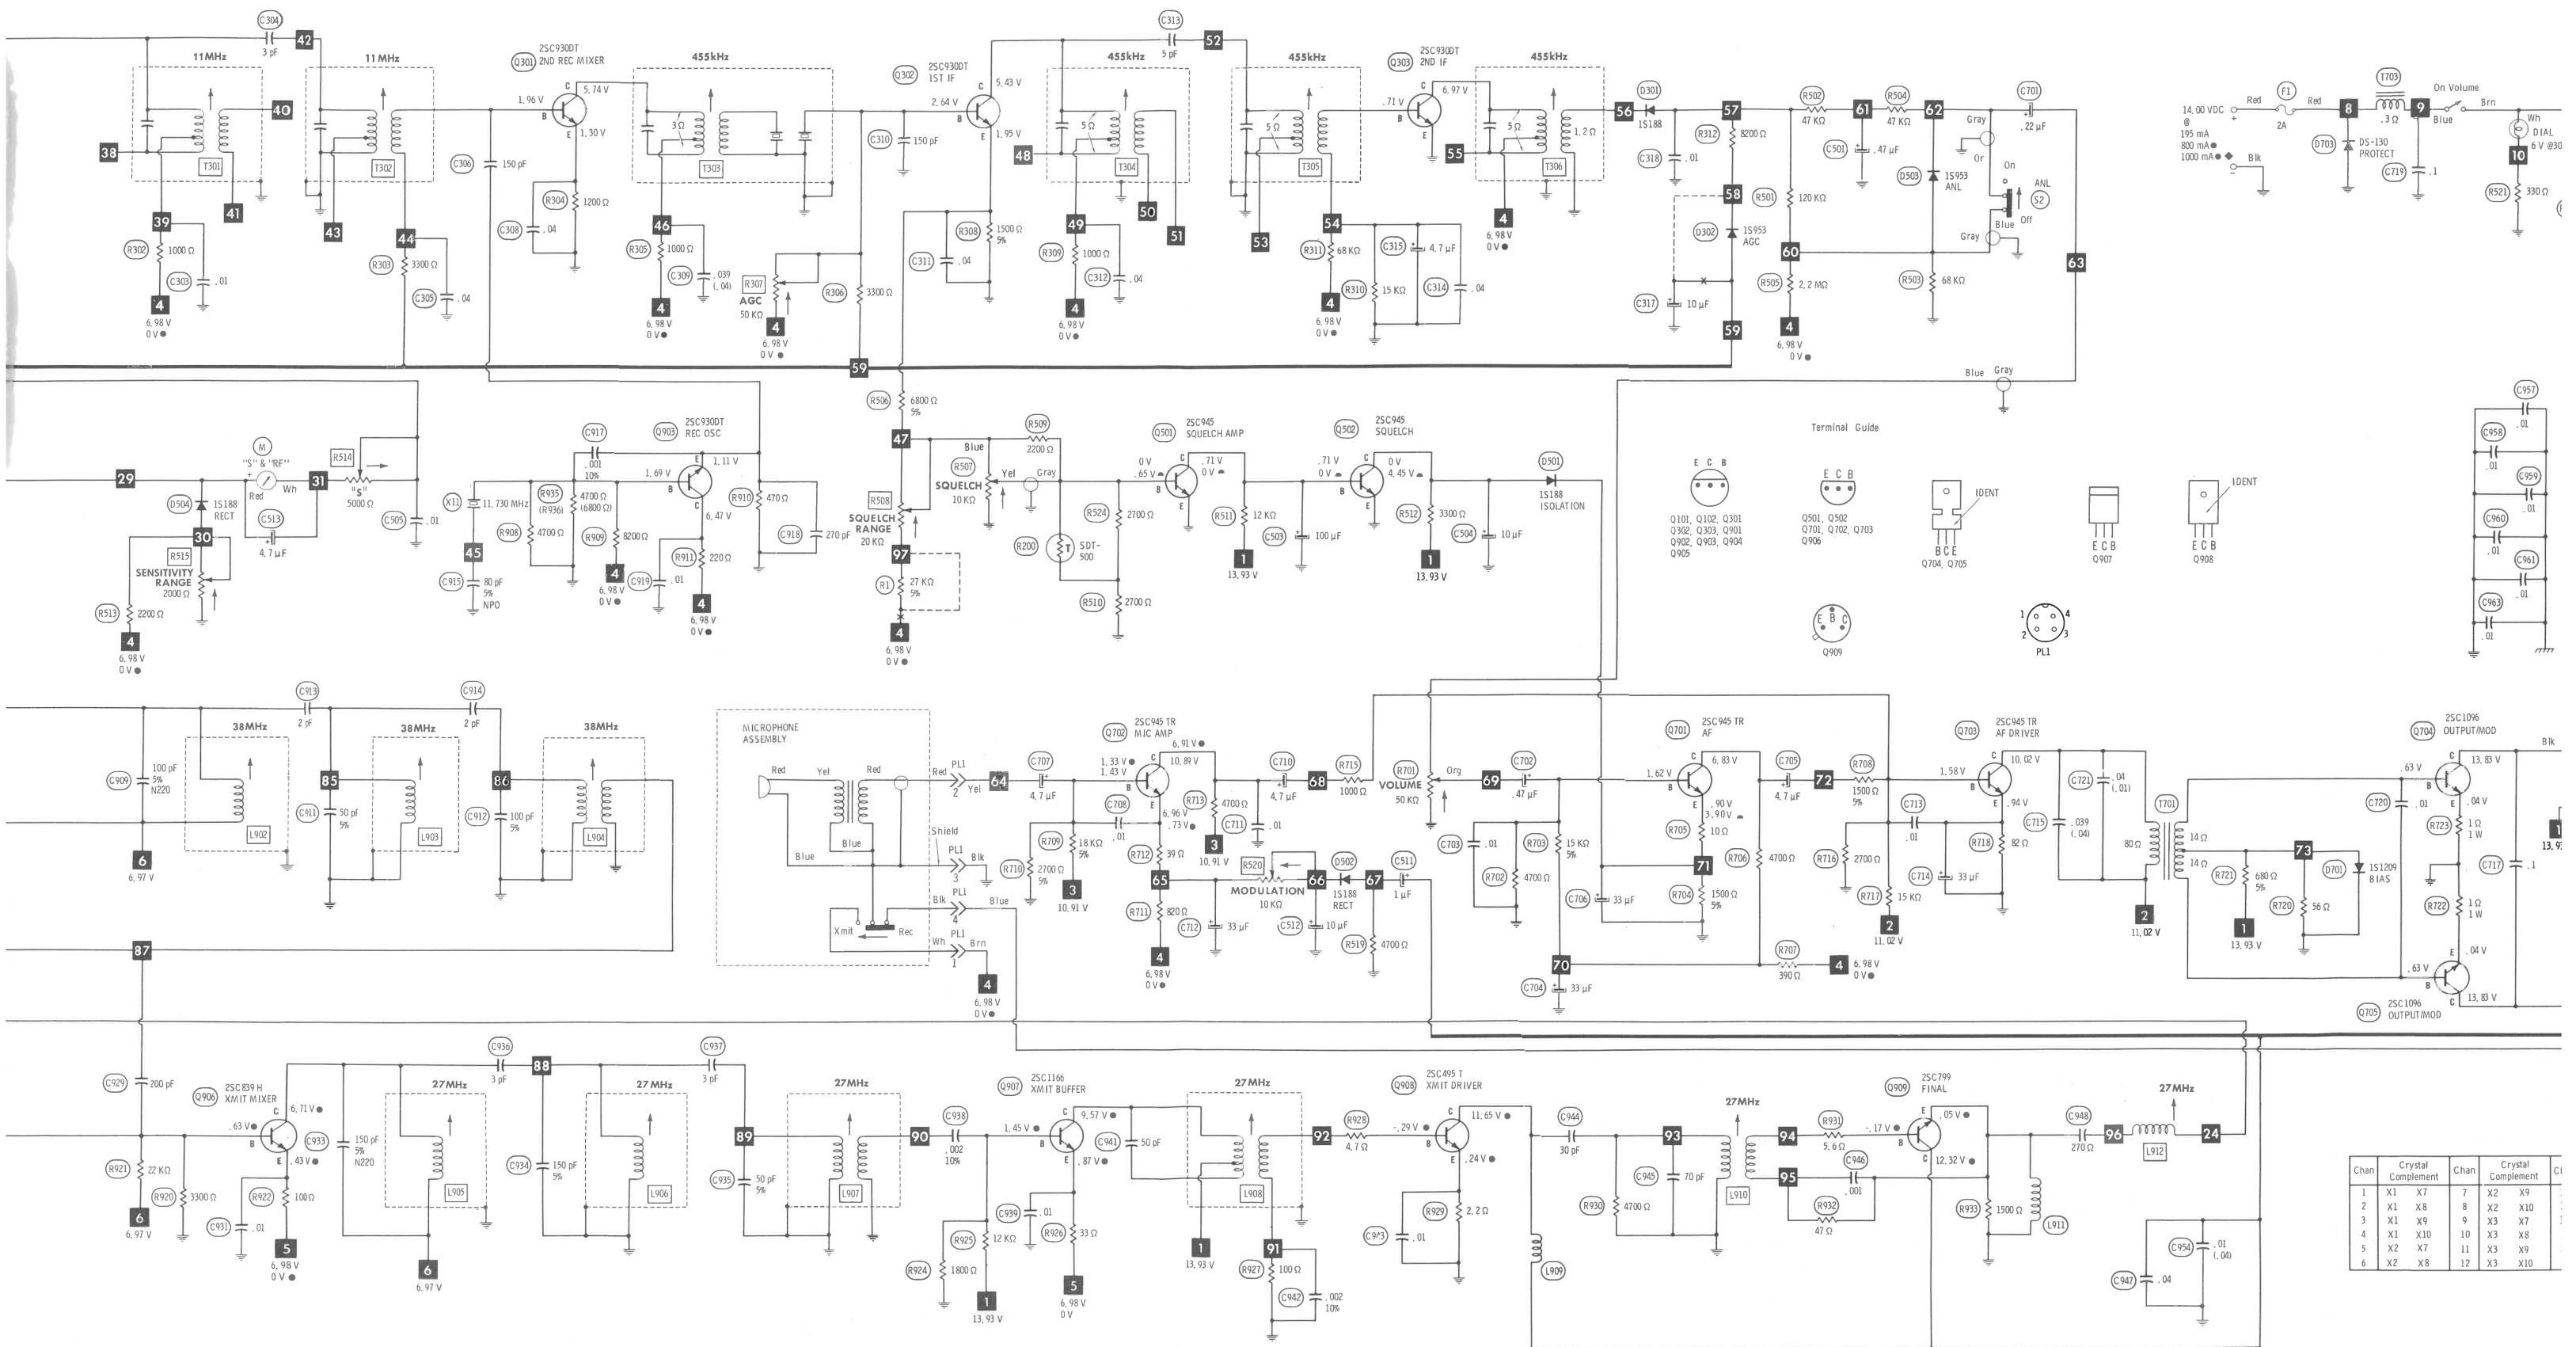

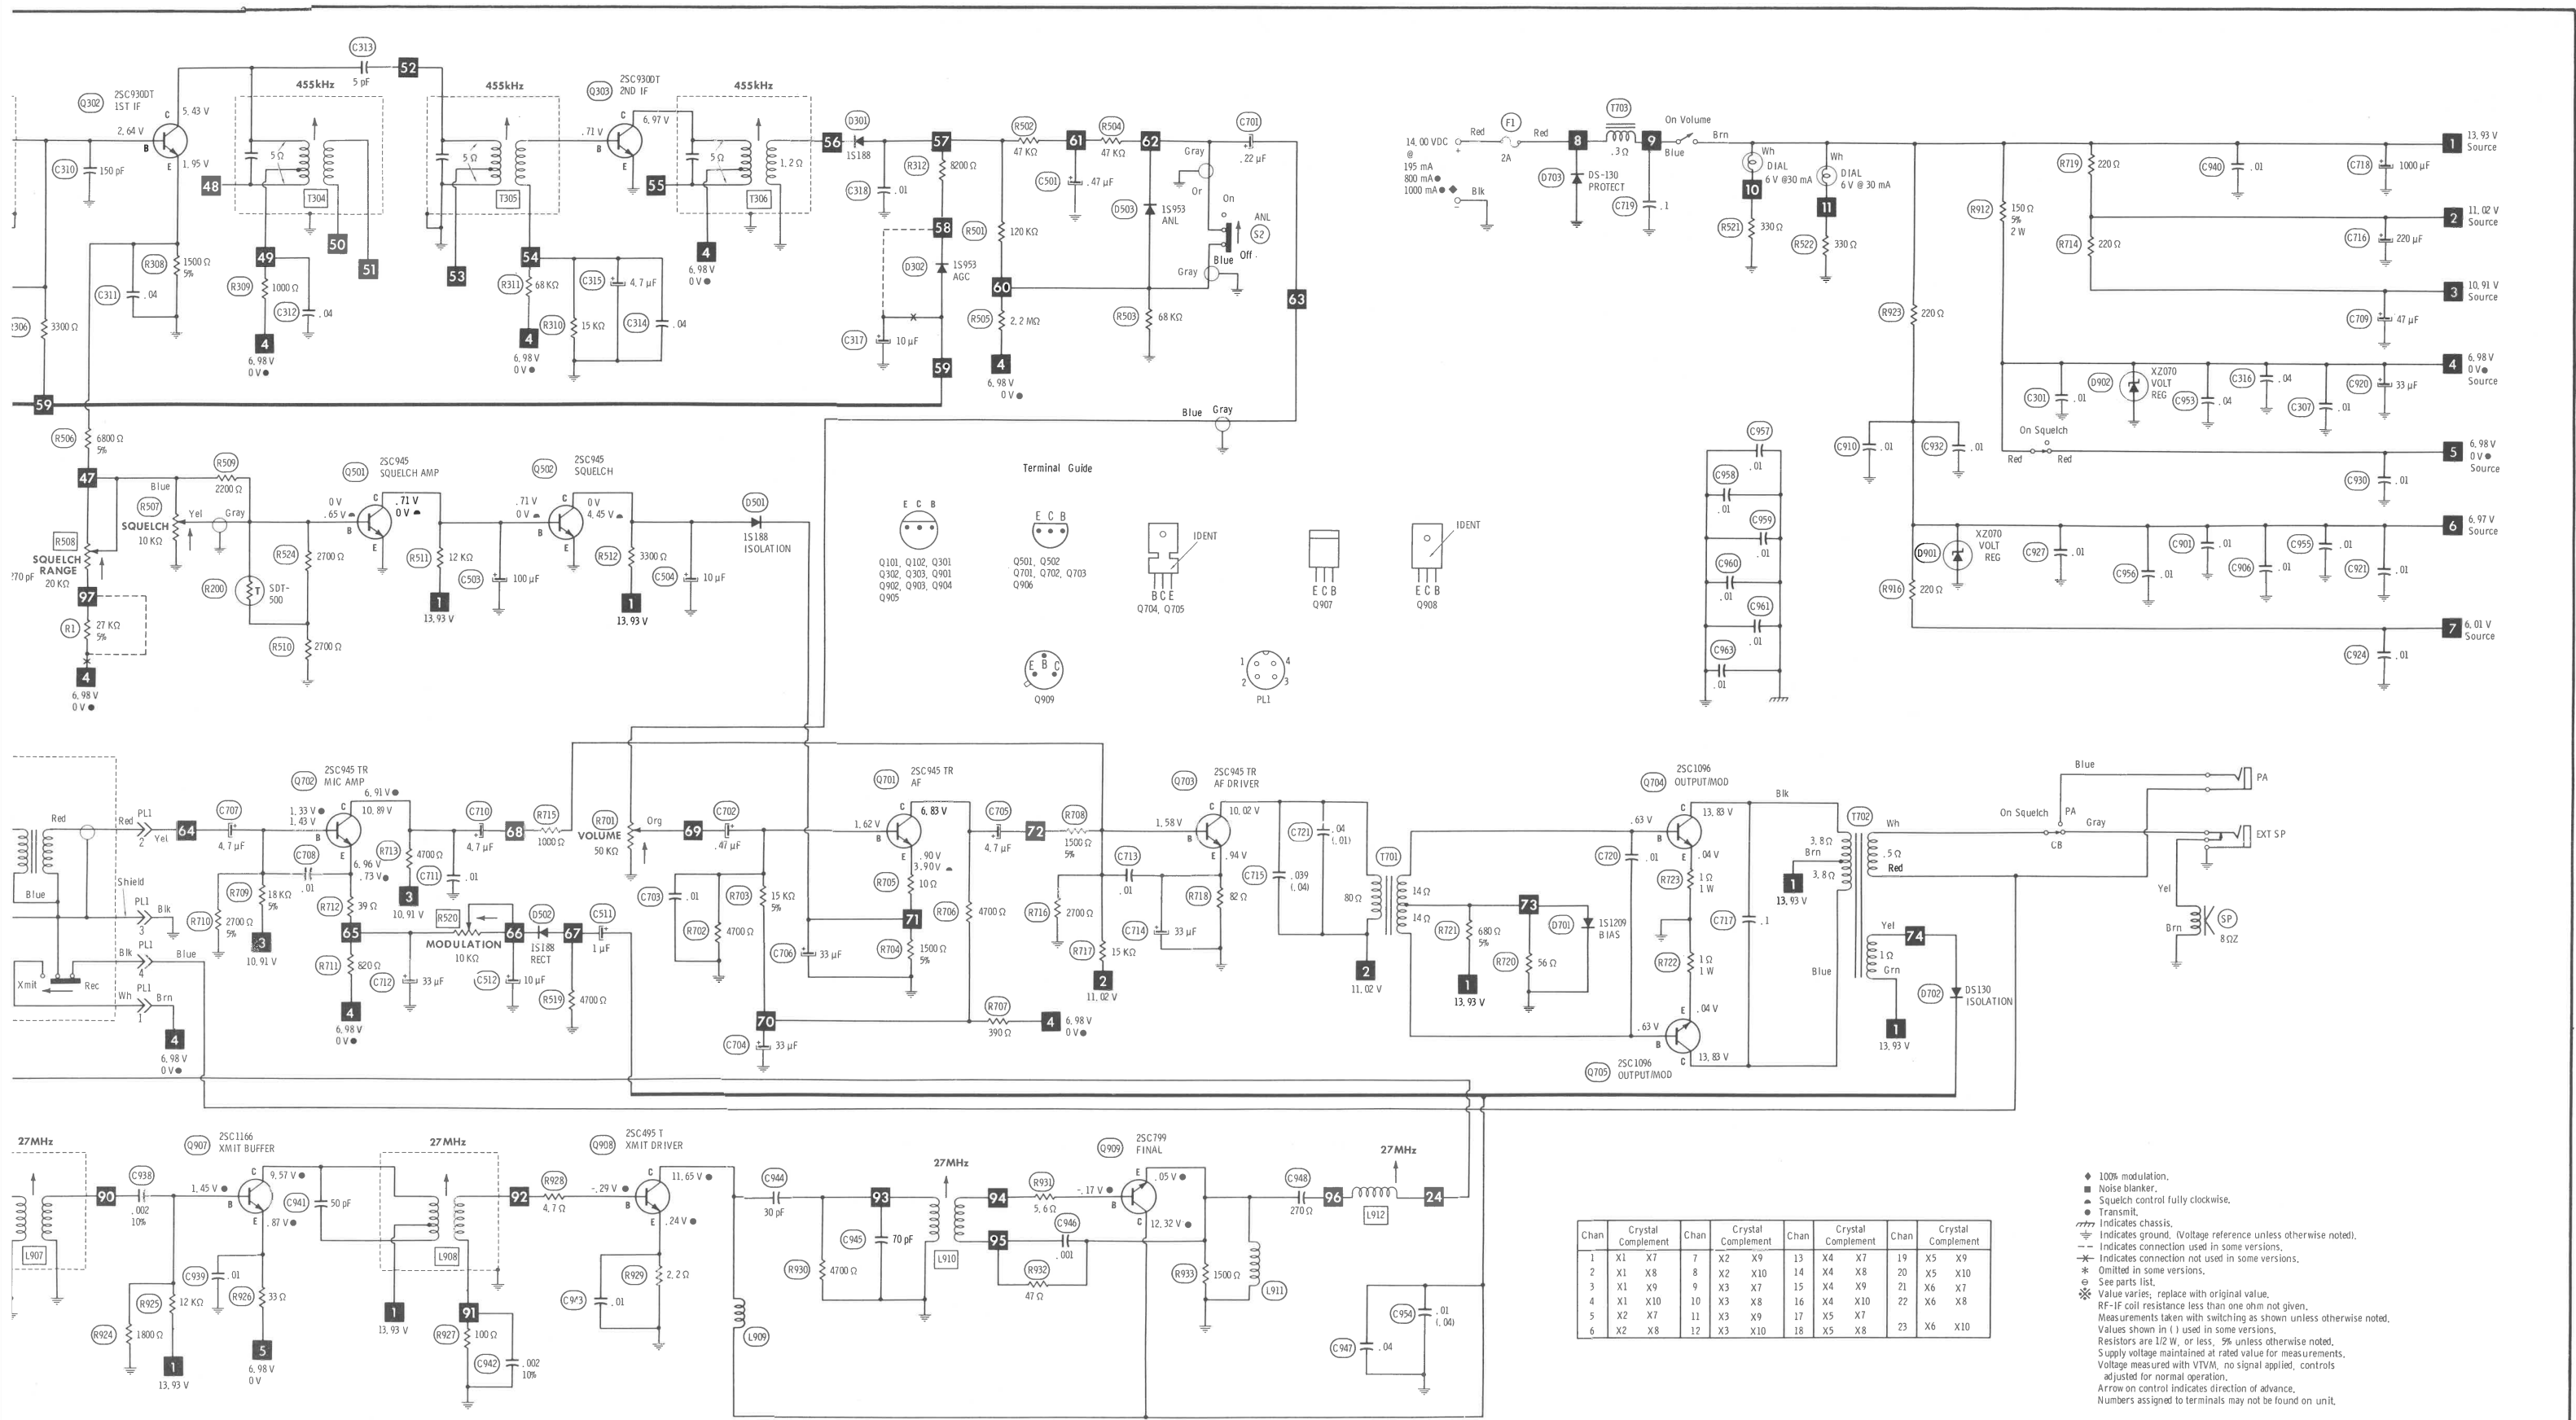

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

ELECTROLYTIC CAPACITORS

ITEM No.	RATING	REPLACEMENT DATA					
		MFGR. PART No.	ARCO PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C108	.33 10V	R-C9882 R-C9889	RME-A-D-005	EP6-5	PC5-50	TDC334M050EL	SD35-R339
C315	4.7 6.3V		RME-A-D-010	EP15-10	PC10-25	VTT4R7A50	EV-1319
C317	10 10V					VTT10A25	EV-1222
C501	.47 16V					TDC474M050EL	SD35-R479
C503	100 16V					MTV100CD15	EV-1230
C504	10 16V	R-C9907	RME-E-E-100	EP15-100	PC100-16	VTT10A25	EV-1222
C511	1 50V	R-C9889	RME-B-E-010	EP15-10	PC10-25	MTV1CB50	EV-1615
C512	10 16V	R-C9235	RME-A-J-001	EP50-1	PC1-50	VTT10A25	EV-1222
C513	4.7 6.3V	R-C9889	RME-B-E-010	EP15-10	PC10-25	VTT4R7A50	EV-1319
C701	.22 10V	R-C9882	RME-A-D-005	EP6-5	PC5-50	TDC224M050EL	SD35-R229
C702	.47 16V	R-C9120				TDC474M050EL	SD35-R479
C704	.22 10V	R-C9881					
C705	33 6.3V	R-C9881	ME-2-B-035	EP6-25	PC30-25	VTT33A10	EV-1125
C706	4.7 6.3V	R-C9882	RME-A-D-005	EP6-5	PC5-50	VTT4R7A50	EV-1319
C707	33 10V	R-C9934	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125
C709	4.7 6.3V	R-C9882	RME-A-D-005	EP6-5	PC5-50	VTT4R7A50	EV-1319
C710	47 16V	R-C9886	RME-E-E-050	EP15-50	PC50-16	MTV50CB15	EV-1226
C712	4.7 6.3V	R-C9882	RME-A-D-005	EP6-5	PC5-50	VTT4R7A50	EV-1319
C717	33 10V	R-C9934	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125
C714	33 6.3V	R-C9881	ME-2-B-035	EP6-25	PC30-25	VTT33A10	EV-1125
C716	220 16V	R-C9877	RME-J-E-250	EP15-250	PC250-25	MTV250DE15	EV-1245
C718	1000 16V	R-C9878	RME-N-E-1000	EP15-1000	PC1000-16	MTA1000G25	EV-1260
C920	33 10V	R-C9934	RME-N-G-500	EP30-500	WBR500-25	MTA500G25	EV-1350

CAPACITORS

ITEM No.	RATING	MFGR. PART No.	REPLACEMENT DATA				
			ARCO/ELMENCO PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C101	16		*			CN0418	10TCC-Q18
C102	40 N220 5%		*			* GP140	10TCR-Q39
C103	.04		CCD-403			CN0510	5GA-S40
C104	1					MAG5011	10TCC-V10
C105	.01		CCD-103			*	2SS-S10
C106	80 N220 5%		*	DC-103	GP10000	* 10TCR-Q82	10TCC-Q82
C107	.01		CCD-103			MAG5011	2SS-S10
C109	30		CCTO-300				10TCC-Q30
C110	.01		CCD-103			MAG5011	2SS-S10
C301	.01		CCD-103			MAG5011	2SS-S10
C302	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C303	.01		CCD-103			MAG5011	2SS-S10
C304	3		CCTO-3R3			CN0533	10TCC-V33
C305	.04		CCD-403			GP140	5GA-S40
C306	150		CCD-151	DD-151	GP10000	CN0315	10TCC-T15
C307	.01	CCD-103	DC-103	MAG5011		2SS-S10	
C308	.04	CCD-403		GP140		5GA-S40	
C309	.039	6DP-3-393		PVC6139		6PS-S39	
C310	150	CCD-151	DD-151	CN0315		10TCC-T15	
C311	.04		CCD-403			GP140	5GA-S40
C312	.04		CCD-403			GP140	5GA-S40
C313	5		CCTO-050			GP140	10TCC-V50
C314	.04		CCD-403			GP140	5GA-S40
C316	.04		CCD-403			GP140	5GA-S40
C318	.01 50V		1MDF-1-103	CPJ-103	DPMS4S1	EWFTA110	1PB-S10
C505	.01		CCD-103			MAG5011	2SS-S10
C506	.01		CCD-103			MAG5011	2SS-S10
C507	.01		CCD-103			MAG5011	2SS-S10
C508	5		CCTO-050			MAG5011	10TCC-V50
C509	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C510	6		CCD-103				10TCC-V68
C703	.01		CCD-103			MAG5011	2SS-S10
C708	.01 50V		1MDF-1-103			EWFTA110	1PB-S10
C711	.01		CCD-103			MAG5011	2SS-S10
C713	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C715	.039 50V		6DP-3-393			PVC6139	6PS-S39
C717	.1					MGP1	TG-P10
C719	.1					MGP1	TG-P10
C720	.01		CCD-103			MAG5001	2SS-S10
C721	.04		CCD-403	DC-103	GP10000	GP140	5GA-S40
C901	.01		CCD-103			MAG5011	2SS-S10
C902	150 5% NPO					CN0315	10TCC-T15
C903	40		CCTO-390			CN0439	10TCC-Q39
C904	100 5% N220		*			*	10TCR-T10
C905	50			DTZ-50	NP050	CN0450	10TCC-Q50
C906	.01		CCD-103			MAG5011	2SS-S10
C907	.01		CCD-103			MAG5011	2SS-S10
C908	.01		CCD-103			MAG5011	2SS-S10
C909	100 5% N220		*			*	10TCR-T10
C910	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C911	50 5%					NP050	10TCC-Q50
C912	100 5%					NP0100	10TCC-T10
C913	2		CCTO-2R2			NP02P2	10TCC-V22

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

CAPACITORS(cont)

ITEM No.	RATING	MFGR. PART No.	REPLACEMENT DATA				
			ARCO/ELMENCO PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C914	2		CCTO-2R2	DTZ-2R2	NP02P2	CN0522	10TCC-V22
C915	80 5% NPO			DTZ-82	NP082	CN0482	10TCC-Q82
C917	.001 10%		CCD-102	DD-102	GP1000	GP210	2SS-D10
C918	270		CCD-271	DD-271	GP270	GP327	10TS-T27
C919	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C921	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C922	500 5%		DM15-501J		CD15FD501J03		
C923	120 5% NPO			DTZ-120		CN0312	10TCC-T12
C924	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C925	.001 10%		CCD-102	DD-102	GP1000	GP210	2SS-D10
C926	200		CCD-201	DD-201	GP200	GP320	10TS-T20
C927	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C928	130			DTZ-120		CN0312	10TCC-T12
C929	200		CCD-201	DD-201	GP200	GP320	10TS-T20
C930	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C931	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C932	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C933	150 5% N220		*			*	10TCR-T15
C934	150 5%			DTZ-150		CN0315	10TCC-T15
C935	50 5%			DTZ-50	NP050	CN0450	10TCC-Q50
C936	3		CCTO-3R3	DTZ-3R3	NP03P3	CN0533	10TCC-V33
C937	3		CCTO-3R3	DTZ-3R3	NP03P3	CN0533	10TCC-V33
C938	.002 10%		CCD-202			GP220	10TS-D20
C939	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C940	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C941	50			DTZ-50	NP050	CN0450	10TCC-Q50
C942	.002 10%		CCD-202			GP220	10TS-D20
C943	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C944	30		CCTO-300				10TCC-Q30
C945	70			DTZ-75	NP075	CN0475	10TCC-Q75
C946	.001		1MDF-1-102	CPJ-102	DPMS6D1	EWFTA210	1PB-D10
C947	.04		CCD-403			GP140	5GA-S40
C948	270		CCD-271	DD-271	GP270	GP327	10TS-T27
C949	220		CCD-221	DD-221		GP322	10TS-T22
C950	220		CCD-221	DD-221		GP322	10TS-T22
C951	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C952	45		CCTO-470	DTZ-47	NP047	CN0447	10TCC-Q47
C953	.04		CCD-403			GP140	5GA-S40
C954	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C955	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C956	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C957	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C958	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C959	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C960	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C961	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C963	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10

* Not normally in distributor's stock. Available thru distributor on order to manufacturer.

179C

TEABERRY MODEL "T" CHARLIE ONE

PARTS LIST AND

(When ordering parts,

RESISTORS (Power

ITEM No.	RATING
R200	3022 Co1d NTC

COILS (RF-IF)

ITEM No.	FUNCTION
L101	Rec. Antenna (27MH
L102	Rec. RF (27MHz)
L901	Osc. (23MHz)
L902	Synth. Mixer (38MH
L903	Synth. Mixer (38MH
L904	Synth. Mixer (38MH
L905	Xmit. Mixer (27MNz
L906	Xmit. Mixer (27MHz
L907	Xmit. Mixer (27MHz
L908	Xmit. Buffer (27MH
L909	RF Choke
L910	Xmit. Driver (27MH
L911	RF Choke
L912	Final Amp (27MHz)
L913	Antenna (27MHz)
L914	TVI Trap (54MHz)
T301	1st Mixer (11MHz)
T302	1st Mixer (11MHz)
T303	Input IF (455KHz)
T304	Interstage IF (455
T305	Interstage IF (455
T306	Output IF (455KHz)

FILTER CHOKE

ITEM No.	RATINGS	
	CURRENT (Measured)	DC RES.
T703	1000mA	.3

TRANSFORMER

ITEM No.	TURNS RATIO		
	PRI.	SEC. 1	
T701	2	1	

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

CAPACITORS(cont)

ITEM No.	RATING	MFGR. PART No.	REPLACEMENT DATA				
			ARCO/ELMENCO PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C914	2		CCT0-2R2	DTZ-2R2	NP02P2	CN0522	10TCC-V22
C915	80 5% NPO			DTZ-82	NP082	CN0482	10TCC-Q82
C917	.001 10%		CCD-102	DD-102	GP1000	GP210	2SS-D10
C918	270		CCD-271	DD-271	GP270	GP327	10TS-T27
C919	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C921	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C922	500 5%		DM15-501J		CD15FD501J03		
C923	120 5% NPO			DTZ-120		CN0312	10TCC-T12
C924	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C925	.001 10%		DD-102	DD-102	GP1000	GP210	2SS-D10
C926	200		CCD-201	DD-201	GP200	GP320	10TS-T20
C927	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C928	130			DTZ-120	CN0312	GP320	10TCC-T12
C929	200		CCD-201	DD-201	GP200	GP320	10TS-T20
C930	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C931	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C932	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C933	150 5% N220		*		*		10TCR-T15
C934	150 5%			DTZ-150	CN0315		10TCC-T15
C935	50 5%			DTZ-50	NP050	CN0450	10TCC-Q50
C936	3		CCT0-3R3	DTZ-3R3	NP03P3	CN0533	10TCC-V33
C937	3		CCT0-3R3	DTZ-3R3	NP03P3	CN0533	10TCC-V33
C938	.002 10%		CCD-202		GP220	GP220	10TS-D20
C939	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C940	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C941	50			DTZ-50	NP050	CN0450	10TCC-Q50
C942	.002 10%		CCD-202		GP220	GP220	10TS-D20
C943	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C944	30		CCT0-300				10TCC-Q30
C945	70			DTZ-75	NP075	CN0475	10TCC-Q75
C946	.001		1MDF-1-102	CPJ-102	DPMS6D1	EWFI A210	1PB-D10
C947	.04		CCD-403		GP140	GP140	5GA-S40
C948	270		CCD-271	DD-271	GP270	GP327	10TS-T27
C949	220		CCD-221	DD-221		GP322	10TS-T22
C950	220		CCD-221	DD-221		GP322	10TS-T22
C951	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C952	45		CCT0-470	DTZ-47	NP047	CN0447	10TCC-Q47
C953	.04		CCD-403		GP140	GP140	5GA-S40
C954	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C955	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C956	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C957	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C958	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C959	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C960	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C961	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C963	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10

* Not normally in distributor's stock. Available thru distributor on order to manufacturer.

179C

CONTROLS (All wattages 1/2 watt, or less, unless listed)

ITEM No.	FUNCTION	RESIST-ANCE	REPLACEMENT DATA				
			MFGR. PART No.	CENTRALAB PART No.	CLAROSTAT PART No.	MALLORY PART No.	TRW PART No.
R307	AGC	50K	R-R11010	TSV-50K (2) or T-50K (2)	C-503 (2)	MTC54L1 (2)	X201R503B (2)
R507	Squelch/PA Switch	10K	4-222R502				
R508	Squelch Range	100K	R-R11011	TSV-100K (2) or T-100K (2)	C-104 (2)	MTC15L1 (2)	X201R104B (2)
R514	"S" Meter	5000	R-R11012	TSV-5K (2) or T-5000 (2)	C-502 (2)	MTC53L1 (2)	X201R502B (2)
R515	Sensitivity Range	2000	R-R110809	TSV-25K (2) or T-2500 (2)	C-252 (2)	MTC23L1 (2)	X201R252B (2)
R516	"RF" Meter	50K	R-R11010	TSV-50K (2) or T-50K (2)	C-503 (2)	MTC54L1 (2)	X201R503B (2)
R520	Modulation	10K	R-R11013	TSV-10K (2) or T-10K (2)	C-103 (2)	MTC14L1 (2)	X201R103B (2)
R701	Volume/Power Switch	50K	4-222R501	R2-50K (1), SSK012,KR-1	A47-50K-Z (1) KSS-3,SWE-12 or [NP-50K-Z (1), UP-C-400,NWE-12]	RU54A,SL36,SL1500,US41 or [UA54A(1) SK750,US41] or [U33 (1),US262	BU1 (1),CF63,SS1,GC

- (1) Enlarge mounting hole.
(2) Cut off one of the end terminals and bend to fit PC board.

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

RESISTORS (Power and Special)

ITEM No.	RATING	REPLACEMENT DATA		ITEM No.	RATING	REPLACEMENT DATA	
		WORKMAN PART No.	MFGR. PART No.			WORKMAN PART No.	MFGR. PART No.
R200	3022 CoId NTC		SDT-500				

COILS (RF-IF)

ITEM No.	FUNCTION	REPLACEMENT DATA			REMARKS
		PART No.	OTHER IDENTIFICATION	MILLER PART No.	
L101	Rec. Antenna (27MHz)	4-257R326			(1) Includes mechanical filter.
L102	Rec. RF (27MHz)	4-259R828			
L901	Osc. (23MHz)	4-258R813			
L902	Synth. Mixer (38MHz)	4-259R825			
L903	Synth. Mixer (38MHz)	4-259R826			
L904	Synth. Mixer (38MHz)	4-259R827			
L905	Xmit. Mixer (27Mnz)	4-259R801			
L906	Xmit. Mixer (27MHz)	4-259R801			
L907	Xmit. Mixer (27MHz)	4-259R802			
L908	Xmit. Buffer (27MHz)	4-259R10940A			
L909	RF Choke	4-253R701			
L910	Xmit. Driver (27MHz)	4-259R823			
L911	RF Choke	4-255R103			
L912	Final Amp (27MHz)	4-259R805			
L913	Antenna (27MHz)	4-259R806			
L914	TVI Trap (54MHz)	4-259R807			
T301	1st Mixer (11MHz)	4-256R701			
T302	1st Mixer (11MHz)	4-256R714			
T303	Input IF (455KHz)	4-253R806 (1)			
T304	Interstage IF (455KHz)	4-256R703			
T305	Interstage IF (455KHz)	4-256R703			
T306	Output IF (455KHz)	4-256R711			

FILTER CHOKE

ITEM No.	RATINGS			REPLACEMENT DATA				NOTES
	CURRENT (Measured)	DC RES.	INDUCTANCE (O CURRENT 1000~)	MFGR. PART No.	STANCOR PART No.	THORDARSON PART No.	TRIAD PART No.	
T703	1000mA	.3	4mH	4-255R102 (R-W6384)				

TRANSFORMER (Driver)

ITEM No.	TURNS RATIO			REPLACEMENT DATA				NOTES
	PRI.	SEC. 1	SEC. 2	MFGR. PART No.	STANCOR PART No.	THORDARSON PART No.	TRIAD Part No.	
T701	2	1		4-254R118(R-W6375)				

TEABERRY MODEL "T" CHARLIE ONE

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

TRANSFORMER (Audio Output)

ITEM No.	IMPEDANCE		REPLACEMENT DATA				NOTES
	PRI.	SEC.	MFGR. PART No.	STANCOR PART No.	THORDARSON PART No.	TRIAD PART No.	
T702	32	8	4-254R53271A (4R53271B)				

SPEAKER

ITEM No.	TYPE	REPLACEMENT DATA		NOTES
		MFGR. PART No.	QUAM PART No.	
SP	3 1/2" PM 8 ohms	4-151R801	3A05S8	

FUSE DEVICES

ITEM No.	DESCRIPTION	REPLACEMENT DATA					
		PART No.		BUSS PART No.		LITTELFUSE PART No.	
		DEVICE	HOLDER	DEVICE	HOLDER	DEVICE	HOLDER
F1	2 Amp	4-234R809	123-2-383R101	AGC-2	HDJ	312002	150145

TEABERRY MODEL "T" CHARLIE ONE

MISCELLANEOUS

ITEM No.	PART NAME	PART No.	NOTES
M	Meter	4-511R10592	"S" RF
S1	Switch	4-231R504	Channel Selector
S2	Switch	4-231R022	ANL
X1	Crystal	4-225R809	23.290MHz
X2	Crystal	4-225R810	23.340MHz
X3	Crystal	4-225R811	23.390MHz
X4	Crystal	4-225R812	23.440MHz
X5	Crystal	4-225R813	23.490MHz
X6	Crystal	4-225R814	23.540MHz
X7	Crystal	4-225R805	14.950MHz
X8	Crystal	4-225R806	14.960MHz
X9	Crystal	40225R807	14.970MHz
X10	Crystal	4-225R808	14.990MHz
X11	Crystal	4-225R803	11.730MHz
X12	Crystal	4-225R804	11.275MHz

ACCESSORIES

ITEM	MFGR. PART No.	REMARKS
Microphone	4-153R10676A	

INDEX

THIS INDEX LISTS ALL RADIOS APPEARING IN
"CITIZENS BAND MANUALS" AND "PHOTOFACT CB RADIO SERIES"

KEY----- (REV) REVISED (EP) EARLY PRODUCTION (LP) LATE PRODUCTION

AIRCRAFT	VOL.	CHANNEL MASTER	VOL.	DEMCO (CONT.)	VOL.	GONSET (CONT.)	VOL.	JOHNSON (CONT.)	VOL.
JE321	15	6423	40	Satellite M-10A,		G-15 (3428),(3429) ...	4	Messenger 110	
23-02	38	6553	9	R-101A, T-110A,				(242-0110)	19
AIRLINE		6554	13	VM-12-120	7	HALLICRAFTERS		Messenger 120	
GAS-587	4	CITI-FONE		Travelier (Series B) .	8			(242-0120)	41
ALLIED		CD-5/6/-5/12	1	DEWALD		BC-8	10	Messenger 121	
A-2507 (17B6790X)	20	CD-5A/6,CD-5A/12	9	TR-6/-12/910	2	CB-1	1	(242-0121)	40
A-2530 (17B6825X)	19	CD-6/6,CD-6/12	3	DUO COM		CB-3	3	Messenger 122	
A-2533 (17B6440X)	22	CD11/6,CD11/12	12	100	2	CB-3A	5	(242-0122)	45
A-2543 (17-9801S)	21	SS	9	DYNASCAN		CB-4 (Littlefone)	3	Messenger 123	
A-2544 (17B9802S)	23	19	26	(See Cobra)		CB-5A	5	(242-0123A & B)	24
A-2545 (17B9803S)	18	99/6,99/12	12	EICO		CB-5 Mark II, HA-14,		Messenger 123	
A-2559 (21B5559U)	34	CLARICON		712	13	P-5-120	6	(242-123) (Rev.)	
A-2561 (21B5561)	35	II (1103-01)	15	740	4	CB-7	7	-C/-D/-E/-F/-G	42
A-2564 (17A6966U)	29	14-523	27	760/61W/62/62W	2	CB-8	10	Messenger 123A	
A-2567 (17B6435X)	22	15-200	16	770/W	3	CB-9	8	(242-0123)	47
A-2568 (17A6965U)	29	15-410	14	771W,772W	4	CB-10	9	Messenger 124	
A-2569 (17C6469U)	24	15-500	23	777	7	CB-12	11	(242-124)	28
ALLSTATE		15-600	33	779	9	CB-14/-17	12	Messenger 124-M	
832.62270	7	COBRA		779A	17	CB-19	13	(242-0134)	39
893.62910/11/21/31/41.	6	CAM-88	9	7923 (Nova 23)	18	CB-20	14	Messenger 125	
AMPHENOL		CAM-89	58	ELECTRONIC 2000		CB-21	20	(242-125)	28
C-75	12	V	13	Contact CB-23CH	56	CB-24	22	Messenger 130	
80	22	6	34	FANON		PS-20	20	(242-0130)	63
600,625	11	20	49	CHB-3	35	HALLMARK		Messenger 223	
650	13	21	51	CHB-4	37	512	5	(242-223)	23
675	14	23, PAC-V	16	Fanfare 100	54	1250B	10	Messenger 250	
725	15	24	26	Fanfare 700	53	HAMMARLUND		(242-0250)	60
750	19	25	33	FCB-9	4	CB-SIX (CB-6)	7	Messenger 250A/B (Rev)	
777	18	27	23	IC-3000	24			(See Page 39)	60
APELCO		28, PAC-24	43	IC-5000	25	HEATHKIT (HEATH)		Messenger 300	
AR-9	1	29	56	L-1000	18	CB-1	1	(242-0149),323	
AR-10	7	98	23	L-2000	17	GRS-65A	14	(242-0153-002)	17
ARKAY		130	44	SFT-400	35	GW-10A/D, GWW-10A/D	3	Messenger 320	
SQ-9/-9W	2	131	45	SFT-500	35	GW-11A/-11D, GWW-11A/-		(242-320)	21
ARVIN		132 (EP & LP)	54	SFT-600	31	-11D	4	Messenger 323-M	
20Y33-19 (1.45501) ...	27	135 (EP & LP)	54	SFT-800A	34	GW-12A/-12D, GWW-12A/-		(242-0158-001)	40
20Y55-19 (1.45601) ...	29	138	57	SFT-900		-12D	5	Messenger 350	
AUTOMATIC		139	59	(Guardsman)	37	GW-14, GWA-14-1, GWW-14. 11		(242-0154)	14
MCE-6510	25	880	47	T-606	41	GW-14A, GWW-14A/14AS. ..	29	Messenger 351	57
MCR-6450	17	CONCORD		T-707	43	GW-21, GWW-21	4	Personal Messenger	
PCR-6452	22	TG-132B	12	T-808	38	GW-22A/-22D, GWW-22A/-		(242-101-1)	2
PCR-6452	25	COURIER (E.C.I.)		T-909	40	-22D	5	239-0125	
TRC-6448	17	Cadet 23	46	T-1000	45	GW-30	2	(Power Supply)	15
TRE-6500	25	Caravelle	38	FIELDMASTER		GW-31, GWW-31	4	239-0125 (Rev.)	25
TRR-6454/A	17	CCT-2 W/CHB-3	35	MF-1001	60	GW-32A/D, GWW-32A/D, ..		KAAR	
BENDIX		CCT-3	37	Micro Mini 3	55	GW-42, GWW-42	6	TR327/A/B	5
CB-6/-12	2	CCT-4	36	Micro Mini 6	58	MW-34, MWW-34	8	TR336 (SkyLark I)	18
BROWNING		Centurion	52	Micro Mini 23	56	HY-GAIN		TR337 (Skyhawk II)	20
Eaglette	20	Chief 23	35	TR-18M	57	670 (Hy-Range I)	63	6/117TR333/B,12/	
Eaglette 2	29	Citation	34	GENERAL ELECTRIC		671 (Hy-Range II) ...	63	117TR333/B, 32/TR333B. 8	
LTD	66	Classic	25	Y7050A	16	672 (Hy-Range III) ..	65	12TR335 (Skyhawk)	10
Mark II Series B,		Classic II	30	GENERAL RADIO & TELEPHONE		673 (Hy-Range IV) ...	64	KNIGHT	
SSB-115	39	Classic III	67	MC-6	7	675 (Hy-Range VI) ...	64	KN-2500 (90SU413)	7
R-27,S-23	10	Comet 23	48	Super MC-8	13	ITT		KN-2520 (17A6810X/	
SST	37	Conqueror	38	Super MC-9	16	320	3	KN-2522 (17A6812X) ..	15
69R, 69T (Golden		Courier Clipper 23 ...	26	Super MC-11/A	22	JCPenney		KN-2526 (86SX568)	8
Eagle Mark II)	27	Courier Royale	14	VS-6,VS-7	11	981-6051		KN-2550 (90SU456),	
CADRE		Courier TR-5	16	GLOBE		(Golden Pinto)	28	KN-2560 (90SX467) ...	7
C-75	11	Courier TR-23S	13	CB-100	1	981-6075		KN-2565 (86SX568)	8
500/C	3	Courier 1M, 23	8	CB-100A	3	(Pinto SSB)	47	KN-2567 (17B6435X) ..	22
510	4	Courier 23 Plus	18	CB-200	2	981-6200	51	KN-2580 (86SX625)	9
510A,515	6	CWT-30	29	Globe Master 65-220 ..	6	985-6050 (Pinto 23) ...	27	KN-2585 (86SU774) ...	14
525 (500-1,520)	7	CWT-40	27	X-90 (Pocketphone) ...	1	985-6055 (Pinto Jr.) .	30	KN-2590 (86RU515MU) ..	11
CAPITOL		CWT-50	30	65-228		985-6060 (Pinto-23B) .	28	24SC180	9
ND-309	3	Fleet Courier,30-B ..	9	(President VIII)	7	JOHNSON		KRIS	
		Gladiator	49	GONSET		Messenger II (242-162/		T-23 (516-123)	47
		Ranger 23	33	G-11-3303/-04/-05,		-163,250-180/-811) ..	5	Valiant	68
		Rebel - 23+	54	G-12 (3316),(3329) ..	1	Messenger III		Vega (516-139)	64
		Spartan SSB	56	G-14 (3430),(3433) ...	3	(242-143) (Rev.)	30	23+ (516-023)	45
		Traveller (ML-100) ...	24			Messenger 100	12	99'er	49
		Traveller II	31			Messenger 102		LAFAYETTE	
		DEMCO				(242-102)	32	Comstat 19 (99-3067WX) 14	
		CH-300	11			Messenger 108		Comstat 23	12
		Chalet,DMT-110	14			(242-108)	50	Comstat 23 Mark V	
		Ravelle	11			Messenger 109		(99-3160WX)	23
		Ravelle 23	15			(242-109)	26	Comstat 23 Mark VI	
		Satellite CB-1A	7					(99-3223WX)	47
		Satellite Deluxe	19					Comstat 25A (99-3130WX) 20	
								Comstat 25B	
								(99-32146WX)	33
								Dyna-Com 2 (99-3133L) 21	
								Dyna-Com 3 (99-3134L) 22	

LAFAYETTE (CONT.)	VOL.	METROTEK	VOL.	PACE (CONT.)	VOL.	RADSON	VOL.	SAMPSON	VOL.
Dyna-Com 3A (99-31940L)	37	Bronco (CB-280)	21	CBST-23 (Side Talk 23)	52	RP-115/-612,RT-70A/ -75A	1	M10,R101A/102,T110A, VM12-120	5
Dyna-Com 3B (99-32450L)	46	Charger (CB-281)	22	DX2300B	50	RAYTHEON		SBE	
Dyna-Com 5 (99-3087L) ..	35	Colt 23	13	Pace-Mate 2 W/5812 ..	23	Raycom	4	SBE-1CB (Coronado) ..	29
Dyna-Com 5a (99-32096L) ..	16	Mustang, Pacer	9	Plus 23	15	Raycom-II	6	SBE-2CB (Capri)	30
Dyna-Com 6	19	Pacer II	13	Sidetalk CB-1023	67	Raycom III	27	SBE-3CB (Cascade) ..	31
Dyna-Com 12 (99-3201L) ..	25			Sidetalk CB-1023B	68	Raycom IV	36	SBE-5CB (Cascade II) ..	49
Dyna-Com 12a (99-32484) ..	38	MIDLAND		TA2300/B	32	Ray-Tel TWR-1	1	SBE-6CB	33
Dyna-Com 23 (99-32567L) ..	41	13-130	16	I,II,II-S	12	Ray-Tel TWR-2	4	SBE-7CB (Sierra)	39
HA-100,HB-111	6	13-132	12	10-2	48	Ray-Tel TWR-3	5	SBE-8CB (Console) ..	41
HA-300B (99-3082L)	17	13-133B	11	100	19	Ray-Tel TWR-4	6	SBE-9CB (Catalina) ..	41
HA-303 (99-3091L)	13	13-133C	17	100ASA	53	Ray-Tel TWR-5	8	SBE-10CB (Coronado II)	48
HA-310 (99-31510L)	29	13-133E	34	100-S	19	TWR-6	10	SBE-11CB (Trinidad) ..	47
HA-310A (99-31593L)	42	13-150 (EP)	21	123,123A	41	TWR-7	12	SBE-12CB (Sidebander	50
HA-420 (99-32674L)	48	13-160	8	200	19	TWR-8	14	II)	50
HA-450 (99-3063L)	18	13-700	31	223	46	TWR-9	13	SBE-14CB (Super	51
HB-23	19	13-700 (Rev.)	52	2300	17	TWR-11	15	Console)	51
HB-23A (99-32351WX)	38	13-700B	68	2300 (Late Prod.)	45	REALISTIC		SBE-15CB	
HB-115A	6	13-701	55	2376	32	Americana 23-Plus		SBE-16CB	
HB-200	10	13-701B	55	2376A	43	(21-023)	12	(Console II)	63
HB-222	6	13-720	20	5000	12	TRC-X23A (21-1136) ..	15	SBE-18CB	
HB-333 Series a	8	13-722	25	PALOMAR		TRC-5	7	(Sidebander III)	61
HB-400 (99-3001WX)	9	13-723	56	Skipper 71B	46	TRC-8D	6	SBE-21CB (Cortez)	58
HB-444 (99-3059WX)	11	13-723B	56	Skipper 73	59	TRC-9 (21-139)	60	SBE-22CB (Catalina II)	67
HB-444/25A (99-3074WX) ..	13	(Similar to page 115) ..	56			TRC-10A (21-126)	53	SBE-23CB (Capri II) ..	66
HB-500/-501	9	13-724	32	PANASONIC		TRC-12 (21-909)	13	SEARS	
HB-501	10	13-724B	62	RJ-22	13	TRC-14 (21-032)	18	6469 (Ch.787.10070) ..	17
HB-502A	19	13-725	64	T-1	5	TRC-15 (21-003)	15	6471 (Ch.787.10080) ..	18
HB-525A/B	15	13-725B	67	PEARCE-SIMPSON		TRC-18 (21-120)	19	6550 (Ch.549.30500) ..	10
HB-525C (99-3156WX)	23	13-762	41	AC Power Supply	20	TRC-23B (21-128)	44	6552 (Ch.549.65520) ..	9
HB-525D (99-31759WX)	31	13-770 (6 Ch.)	28	Bearcat 23	32	TRC-24 (21-124)	24	6554 (Ch.549.30001) ..	14
HB-525E (99-32369WX)	43	13-772 (12 Ch.)	28	Bearcat 23B	32	TRC-24B/-24C	65	6556 (Ch.789.10010) ..	15
HB-525F (99-32492W)	49	13-775B	24	(Similar to page 89) ..	32	TRC-27 (94L595)	1	6558 (Ch.789.10010) ..	16
HB-555 (99-3049WX)	10	13-777	61	Bearcat 23C	64	TRC-28 (21-116)	31	6562 (Ch.789.10040/41)	18
HB-555 (99-3049WX)	10	13-778	36	Bengal SSB	60	TRC-29 (21-135)	25	6563 (Ch.789.10050) ..	25
(Rev.)	15	13-790	26	Bobcat 23	33	TRC-35C (21-117)		7203 (562.30010)	25
HB-600 (99-3051WX)	11	13-795	59	Bobcat 23B	42	(Rover-1500)	52	7204 (Ch.562.30020) ..	24
HB-625 (99-3148WX)	21	13-800	61	Cheetah SSB	46	TRC-40 (21-140)	42	7531 (Ch.789.10080) ..	26
HB-625A (99-32468W)	53	13-801	65	Companion	4	TRC-44 (21-1137)	14	7535 (Ch.789.10090) ..	27
HB-700 (99-32773W)	59	13-845	51	Companion II	6	TRC-44B (21-106)	20	SEARS SILVERTONE	
HE-15	1	13-854	59	Companion III	14	TRC-46 (21-146)	55	(See SEARS)	
HE-15B	4	13-855	44	Companion IV	16	TRC-47 (21-147)	61	SHARP	
HE-16/-18	1	13-856	46	Cougar 23 (LP)	58	TRC-49 (21-149)		CBT-58	45
HE-20AWX	2	13-862	58	Director	10	(navaho pro niner) ..	51	SILTRONIX	
HE-20B	4	13-862B	68	Director (Rev.)	15	TRC-50 (21-136)	43	SSB-23	57
HE-20C	5	13-864	60	Escort	6	TRC-66 (21-105)	23	SONAR	
HE-20T (99-3088WX)	16	13-866	66	Escort II	12	TRC-88 (21-188)	14	E	2
HE-20TA (99-32724WX)	61	13-867	55	Guardian 23	8	TRC-99 (21-107)	24	E (Rev.)	4
HE-20WX/-29	2	13-868	37	Lynx 23	49	TRC-99C (21-133)	36	FS-23	7
HE-29A	3	13-870C	27	Panther	26	TRC-100B (21-134)	38	G	6
HE-90	5	13-870D	50	Panther SSB	61	TRC-101 (21-137)	43	H	10
Micro-12	34	13-871	50	Power Match	21	REALTONE		J-23	15
Micro-23 (99-32575W)	48	13-872	31	Puma 23	43	TR-6134	4	T-2	12
Micro-66 (99-32716W)	55	13-873	32	Sentry	11	TR-6436	7	T-6	30
Micro-723 (99-32807W)	54	13-874	38	Sentry II	17	REGENCY		SONARCOM	
Micro-923 (99-32781W)	56	13-877	30	Simba SSB (L.P.)	53	CB-27,CBM-27-6/-12 ..	1	CBP	2
Telsat SSB-25	37	13-878	54	Super Lynx	65	Formula/23 (CB-292) ..	36	SONY	
(99-32377W)	37	13-879	58	Tiger 23	32	GT-523 (CB-283)	22	CB-901	4
Telsat SSB-25A	52	13-879B	66	Tiger 23B	63	Imperial (CB-253)	21	SPOKESMAN	
(99-32559W)	52	13-880B	39	Tiger 23C	68	Imperial II (CB-254) ..	33	700	2
Telsat SSB-50	50	13-881	63	Tomcat 23	62	Range Gain	5	SQUIRES-SANDERS	
(99-32666W)	50	13-883	65	Wildcat	29	Range Gain II	13	Admiral	21
Telsat SSB-50A	66	13-885	42	Wildcat II	40	Ranger CB270	16	Skipper	22
(99-32849W)	66	13-887	67			Romper (A-3)	8	S5S	12
Telsat 23 (99-3157WX)	25	13-896	64	PENNCREST		Sprint/23 (CB-291)	37	23'er	10
Telsat 50 (99-3217WX)	36	13-898	62	(See JCPenney)		Sprint/23 II (CB-293) ..	48	SSBCO	
Telsat 150 (99-3215WX)	26	18-143C	25	PHILMORE		500 (CB-282)	20	(See Mark Products)	
Telsat 924 (99-32435)	44	MONITORADIO		CC-1/-1W,CT-1/-1W, TC-11/-11W,TC-612/ -612W	3	ROBYN		TEABERRY	
Telsat 925 (99-32856W) ..	62	TG-1	4	POLY-COMM		BB-123	39	Big "T"	41
LA SALLE		MORROW		PC-2-6/-12	2	J-123	34	Five by Five	35
LA-101/101A	3	CB-1/-2/-3	1	PC-N-6/-12(4 channel) ..	3	K-123	35	Mini "T"	42
LA-101-AN	7	VP-100-4A	2	Pro	8	SS-747B	53	Mini "T" II	44
LINCOLN		SW1-6/-12/-117, SW3-6/ -12/-117	1	Senior 23	4	T-123	35	"T"	54
L-2542 (17A0766S)	15	OLSON		RADIOCOM		TR-123B	28	"T" Charlie One	68
LLOYD'S		CB-8/-12/-23	14	27C-2A/-2B/-2C	4	TR-123C	38		
WT-715,5A26	11	CB-88	28	RCA		WV-23	67		
MAGNAVOX		RA-530/-590	5	CRM-P2A-5	2	XL-ONE	42		
WT101	3	RA-590 (Slide-Bander II) (Rev.)	11	CRM-P2B-5 (M1-555528, M1-555529),CRM-P3A-5 ..	1	605	57		
MARK PRODUCTS		RA-717	10	Mark VIII (17704)	7	ROSS			
Invader 23	48	OSBORNE		Mark Nine	9	RE-025	31		
Lancer 23	46	300	2	Mark 10 (CB-2601A)	10	RE-050	31		
MASCO		PACE				ROYCE			
MCB-9	4	Auto-Mate	20			1-406	68		
		C123A,123A (L.P.)	55						
		CB-76	50						

TEABERRY (CONT.)	VOL.	TRIUMPH	VOL.	TRUETONE (CONT.)	VOL.	UTICA	VOL.	VOCALINE	VOL.
Twin "T"	40	TC-900/A	4	512 Series B (DX4101) .	7	MC-27	2	ED-27-6/-12/-27M-6/	
TELECON		TRUETONE		1250A	10	T & CII	4	-12	1
TMC-206	10			1250B	11	T & CIII	9	ED-276/-278	8
TRAM		DC4530(13-854) (LP) ..	62					JRC-400/-425	2
Corsair 464	30	DX4370	59					PT-27	3
Diamond 60	62	MCC4370A-57 (DC4370) .	65					WEBCOR	
Titan	13	MCC4434A-57 (DC4434) .	58					ET-350	3
Titan II (5320)	24	MCC4532A-57 (DC4532) .	55					WEBSTER	
Titan IIA	40	MIC4322A-37 (DC4322) .	45					Bandspanner 412	6
Titan III	34	MIC4350A-37 (DC4350) .	63					Four-Eleven	2
Titan IV	49	MIC4812B-17 (DC4812B) .	34			VIKING		WT-2	11
TR-27D/E	10	MIC4820A-86	19	U.S.L.		242-126/-127/-128/		440	5
XL-100	11	MIC4821A-86 (DX4821) .	20	TR-800	1	-129	1	550	8
		MIC4920A-96 (DC4920) .	28						
		MIC4920B-37 (DC4920) .	44						
		MID4820A-86	19						