


# BookletChart™

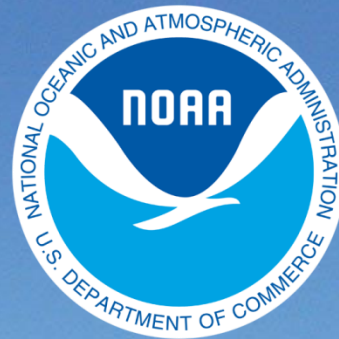

## ***Intracoastal Waterway – Carlos Bay to Redfish Bay***


**NOAA Chart 11314**

***A reduced-scale NOAA nautical chart for small boaters***

***When possible, use the full-size NOAA chart for navigation.***



- Complete, reduced-scale nautical chart
- Print at home for free
- Convenient size
- Up-to-date with Notices to Mariners
- Compiled by NOAA's Office of Coast Survey, the nation's chartmaker

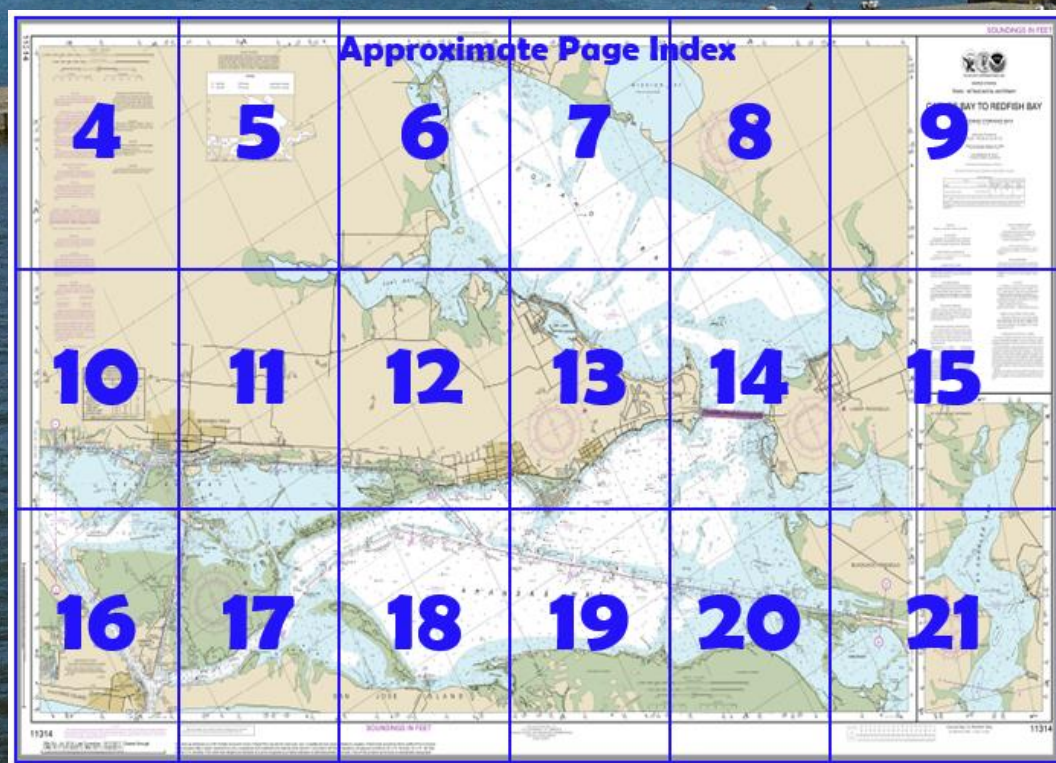

**Published by the**  
**National Oceanic and Atmospheric Administration**  
**National Ocean Service**  
**Office of Coast Survey**  
[www.NauticalCharts.NOAA.gov](http://www.NauticalCharts.NOAA.gov)  
**888-990-NOAA**

### What are Nautical Charts?

Nautical charts are a fundamental tool of marine navigation. They show water depths, obstructions, buoys, other aids to navigation, and much more. The information is shown in a way that promotes safe and efficient navigation. Chart carriage is mandatory on the commercial ships that carry America's commerce. They are also used on every Navy and Coast Guard ship, fishing and passenger vessels, and are widely carried by recreational boaters.

### What is a BookletChart™?

This BookletChart is made to help recreational boaters locate themselves on the water. It has been reduced in scale for convenience, but otherwise contains all the information of the full-scale nautical chart. The bar scales have also been reduced, and are accurate when used to measure distances in this BookletChart. See the Note at the bottom of page 5 for the reduction in scale applied to this chart.

Whenever possible, use the official, full scale NOAA nautical chart for navigation. Nautical chart sales agents are listed on the Internet at <http://www.NauticalCharts.NOAA.gov>.

This BookletChart does NOT fulfill chart carriage requirements for regulated commercial vessels under Titles 33 and 44 of the Code of Federal Regulations.

### Notice to Mariners Correction Status

This BookletChart has been updated for chart corrections published in the U.S. Coast Guard Local Notice to Mariners, the National Geospatial Intelligence Agency Weekly Notice to Mariners, and, where applicable, the Canadian Coast Guard Notice to Mariners. Additional chart corrections have been made by NOAA in advance of their publication in a Notice to Mariners. The last Notices to Mariners applied to this chart are listed in the Note at the bottom of page 7. Coast Pilot excerpts are not being corrected.

For latest Coast Pilot excerpt visit the Office of Coast Survey website at <http://www.nauticalcharts.noaa.gov/nsd/searchbychart.php?chart=11314>



**[Selected Excerpts from Coast Pilot]**  
**Vessels should approach Aransas Pass through the prescribed Safety Fairways.** (See **166.100 through 166.200**, chapter 2.) **Note:** The Aransas Pass Safety Fairway, the SE approach to Aransas Pass, consists of partially divided parallel shipping fairways instead of a single fairway. These parallel fairways are not a traffic separation scheme. However, in the interest of vessel traffic safety, the use of the NE lane for inbound

(298°) traffic and the SW lane for outbound (118°) traffic is recommended.

A **safety zone** has been established around loaded liquified petroleum gas (LPG) vessels transiting Corpus Christi Channel between the outer

end of Aransas Pass jetties and Port of Corpus Christi Oil Dock No. 10, including La Quinta Channel. (See **165.1 through 165.8**, **165.20**, **165.23**, and **165.808**, chapter 2, for limits and regulations.)

The Coast Guard advises vessels to exercise particular caution where the channel intersects the alternate route of the Intracoastal Waterway at Lydia Ann Channel, about 1.6 miles above the entrance jetties, and where Corpus Christi Channel intersects the Intracoastal Waterway main route, about 7.1 miles above Lydia Ann Channel. Situations resulting in collisions, groundings, and close quarters passing have been reported by both shallow and deep-draft vessels. The Coast Guard has requested vessels make a **SECURITE** call on VHF-FM channels 12 and 13 prior to crossing the Intracoastal Waterway, particularly during periods of restricted visibility.

**Anchorage.—Vessels should anchor off Aransas Pass in the Aransas Pass Fairway Anchorages.** (See **166.100 through 166.200**, chapter 2.)

A **special anchorage** is in Corpus Christi Bay. (See **110.1 and 110.75**, chapter 2, for limits and regulations.)

**Currents.**—The currents at times have velocities exceeding 2.5 knots in Aransas Pass; they are greatly influenced by winds. Predictions may be obtained from the Tidal Current Tables.

It is reported that the currents outside Aransas Pass are variable. South-bound currents when reinforced by northerly winds have produced a drift that has been reported as high as four knots across the mouth of the jetties.

Winds from any E direction make a rough bar and raise the water inside as much as 2 feet above normal. Winds from any W direction have an opposite tendency. A sudden shift of the wind from S to N makes an especially rough bar for a short time. During summer months, S winds prevail, becoming moderate to fresh in the afternoon

**Aransas River**, emptying into the NW end of Copano Bay, is shallow and navigable only for small craft of 1 foot or less. The State Route 136 highway bridge across the mouth has a 41-foot fixed span with a clearance of 15 feet. There is a small marina on the W side at the S end of the bridge. The channel leading to the facility had a reported controlling depth of 4 feet in August 1982, and was privately marked by stakes. Water, ice, open and covered berths with electricity, marine supplies, and a launching ramp are available. The marina is closed during the winter season. Overhead power and telephone cables at the bridge have clearances of 17 feet.

**Fulton**, an incorporated city on the W shore of Aransas Bay, is the site of a commercial fish harbor and yacht basin protected by a dike and breakwater. The harbor is entered from Aransas Bay through a dredged channel marked by lights and daybeacons. In October 1999, the controlling depths were 6.0 feet in the entrance channel and 7.0 to 8.0 feet in the basin.

**Key Allegro**, a resort center built on filled-in marshland, is about a mile S of Fulton. **Little Bay** between the key and **Live Oak Peninsula** is shoal.

**Rockport** is a commercial fishing and resort city on the W shore of Aransas Bay. A spoil bank area extends along the NW side of the Intracoastal Waterway, through which are several openings marked by daybeacons.

### **U.S. Coast Guard Rescue Coordination Center** **24 hour Regional Contact for Emergencies**

RCC New Orleans

Commander  
8<sup>th</sup> CG District  
New Orleans, LA

(504) 589-6225



# Navigation Manager Regions





To make suggestions, ask questions, or report a problem with a chart, go to <https://www.nauticalcharts.noaa.gov/customer-service/assist/>


## Lateral System As Seen Entering From Seaward

on navigable waters except Western Rivers



For more information on aids to navigation, including those on Western Rivers, please consult the latest USCG Light List for your area. These volumes are available online at <http://www.navcen.uscg.gov>

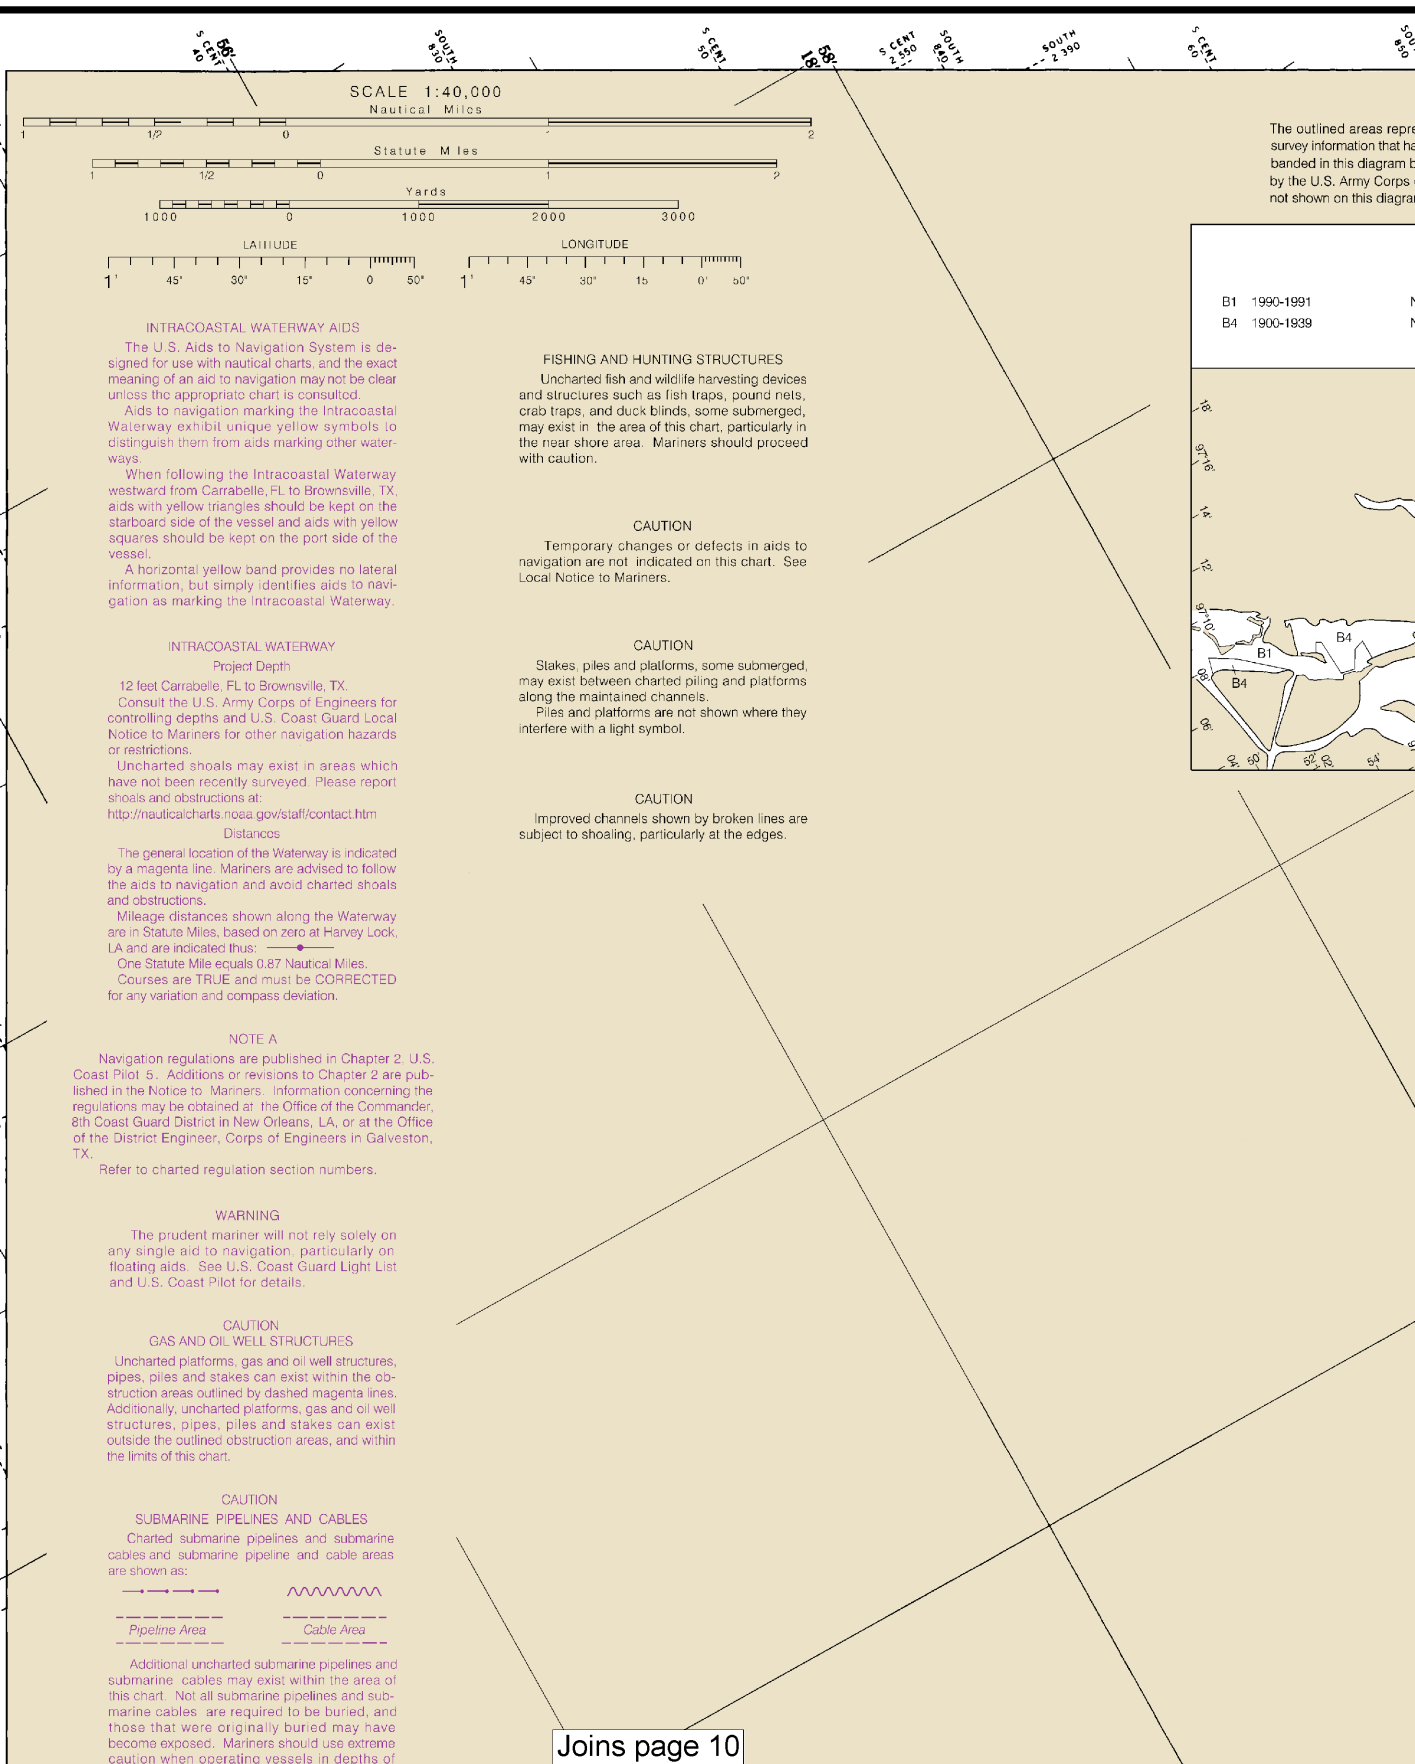

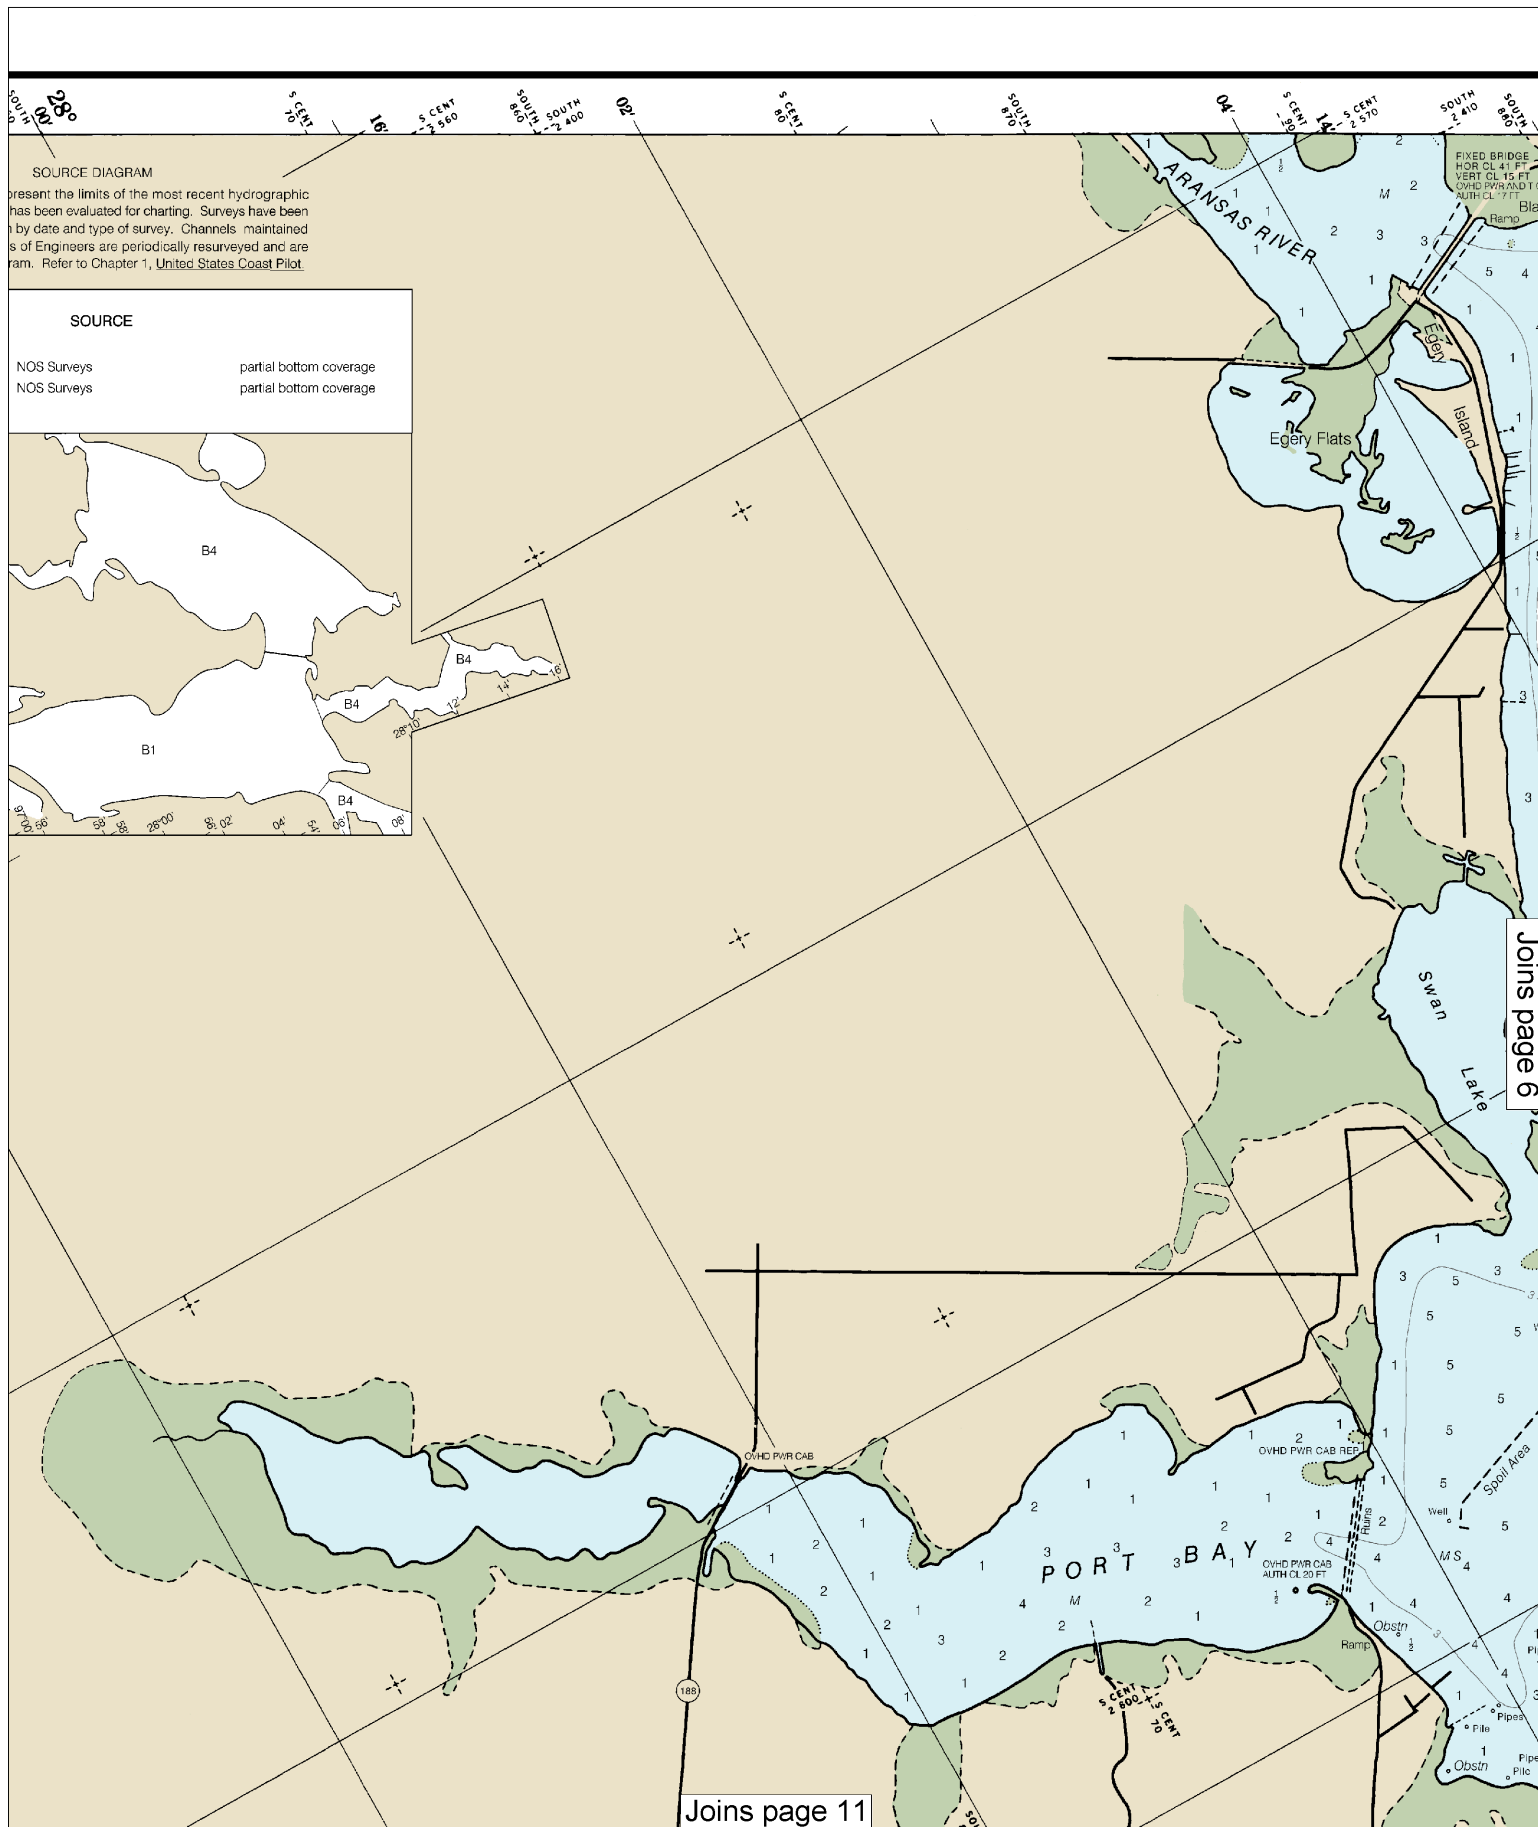

This BookletChart was reduced to 75% of the original chart scale.  
 The new scale is 1:53333. Barscales have also been reduced and  
 are accurate when used to measure distances in this BookletChart.


Joins page 5

Joins page 12


~~SCALE 1:40,000~~  
Nautical Miles

See Note on page 5.

Note: Chart grid lines are aligned with true north.





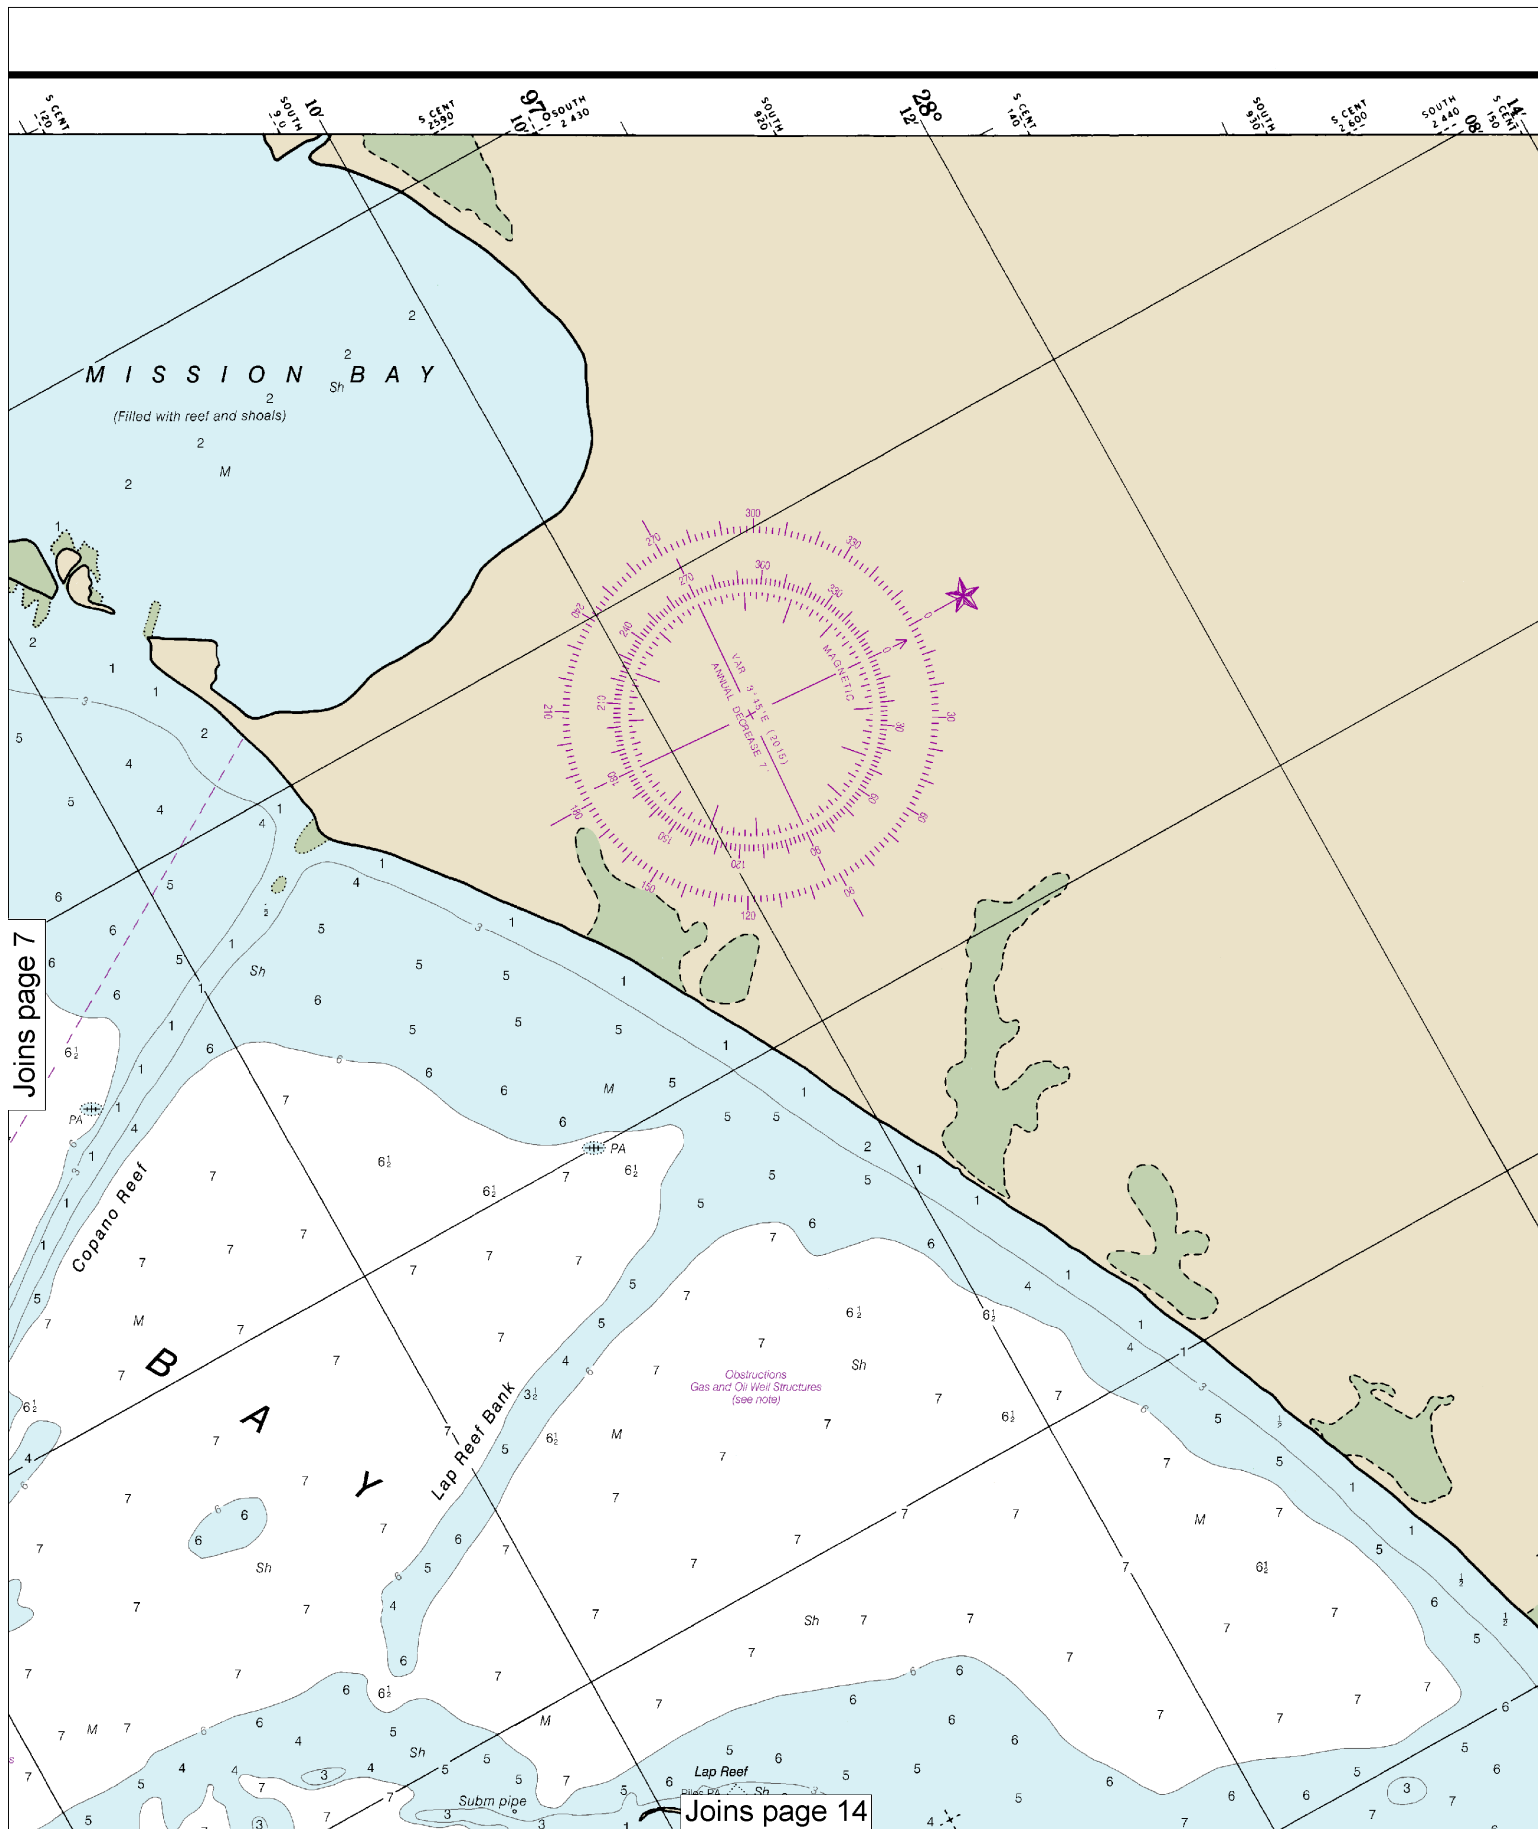

Joins page 7

Joins page 14


8

Note: Chart grid lines are aligned with true north.


Printed at reduced scale.

SCALE 1:40,000  
Nautical Miles

See Note on page 5.





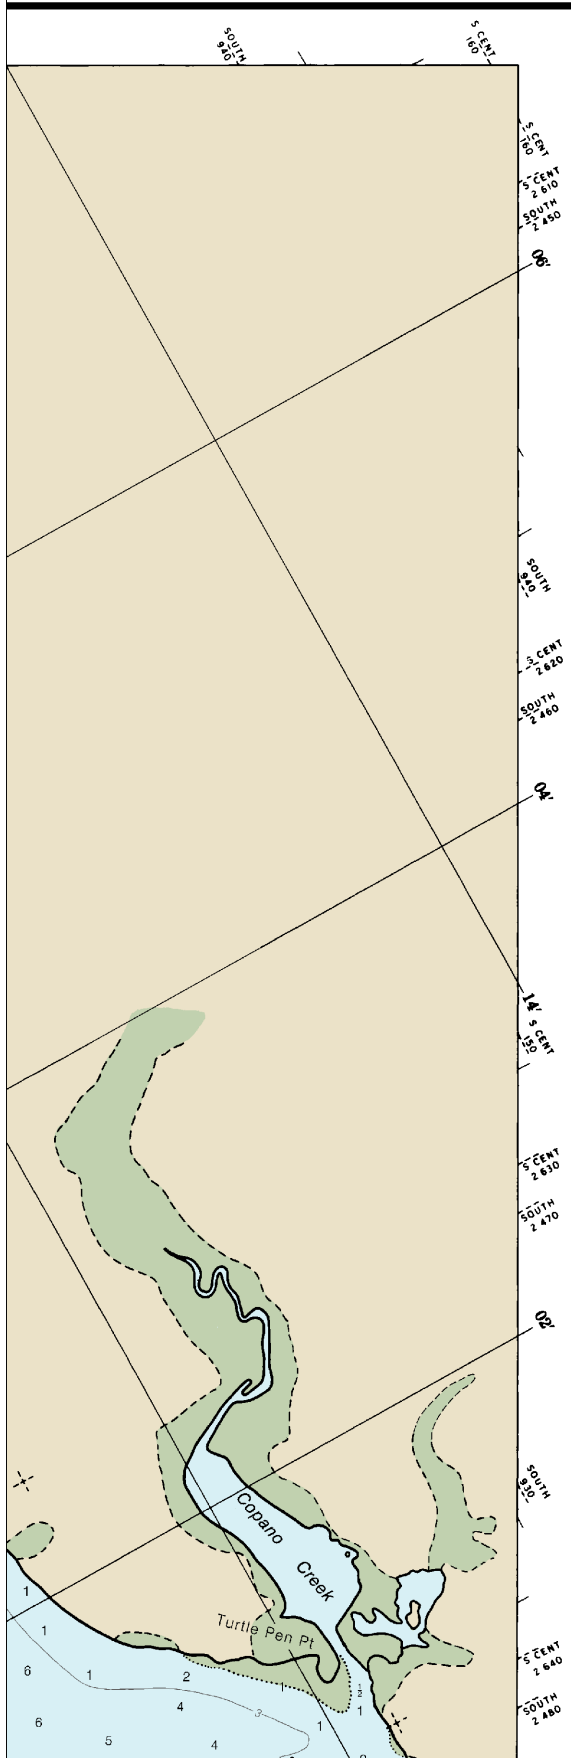

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES

TEXAS - INTRACOASTAL WATERWAY

# CARLOS BAY TO REDFISH BAY

INCLUDING COPANO BAY

Mercator Projection  
Scale 1:40,000 at Lat 28° 00'

North American Datum of 1983  
(World Geodetic System 1984)

SOUNDINGS IN FEET  
AT MEAN LOWER LOW WATER

For Symbols and Abbreviations see Chart No. 1

Additional information can be obtained at [nauticalcharts.noaa.gov](http://nauticalcharts.noaa.gov).

## TIDAL INFORMATION

PLACE	Height referred to datum of soundings (MLLW)			
		Mean Higher High Water	Mean High Water	Mean Low Water
NAME (LAT/LONG)		feet	feet	feet
Aransas Pass Channel (27°50' N/97°03' W)		1.4	---	---

NOTE: Inside the various bays, except near the Gulf inlets, the periodic tide has a mean range less than one-half foot.

Dashes (---) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from <http://tidesandcurrents.noaa.gov> (May 2015).

## HEIGHTS

Heights in feet above Mean High Water.

## AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey, and U.S. Coast Guard.

## SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 5 for important supplemental information.

## RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

## ACKNOWLEDGMENT

The National Ocean Service acknowledges the exceptional cooperation received from members of the Coastal Bend Power Squadron, District 21 United States Power Squadrons, in continually providing essential information for revising this chart.

## POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

## PLANE COORDINATE GRID

(based on NAD 1927)

Texas State Grid, south zone, and south central zone, are indicated by dashed ticks at 10,000 foot intervals thus:

The last three digits are omitted.

## AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

## TIDAL INFORMATION

Near real time water level data, predictions and weather data are available via the Internet at <http://tidesandcurrents.noaa.gov>. Annual predictions of the rise and fall of the tides are available in printed form from private sector printers.

## CAUTION

Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117. Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution. Station positions are shown thus:

⊙ (Accurate location) ○ (Approximate location)

## MINERAL DEVELOPMENT STRUCTURES

Obstruction lights and sound (fog) signals are required for fixed mineral development structures shown on this chart, subject to approval by the District Commander, U.S. Coast Guard (33 CFR 67).


Joins page 15

ROADCASTS

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

**CAUTION**  
GAS AND OIL WELL STRUCTURES  
Uncharted platforms, gas and oil well structures, pipes, piles and stakes can exist within the obstruction areas outlined by dashed magenta lines. Additionally, uncharted platforms, gas and oil well structures, pipes, piles and stakes can exist outside the outlined obstruction areas, and within the limits of this chart.

**CAUTION**  
SUBMARINE PIPELINES AND CABLES  
Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:



Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling. Covered wells may be marked by lighted or unlighted buoys.

⊙ Pump-out facilities


○ Tank

⊙ TR

PORT ARANSAS AND ARANSAS PASS TABULATED FROM SURVEYS BY THE CORPS OF ENGINEERS REPORT OF MAR 2018			
CONTROLLING DEPTHS FROM SEAWARD IN FEET AT MEAN LOWER LOW WATER (MLLW)			
NAME OF CHANNEL	DEPTH (FEET)	WIDTH (FEET)	DATE OF SURVEY
PORT ARANSAS	3.9	100	4-15
APPROACH CHANNEL	7.9	200-400	4-15
HARBOR BASIN	7.5	200-400	4-15
ARANSAS PASS	9.0	125-175	3-18
TURNING BASIN	14.0	300	3-18
CONNECTING CHANNEL	16.0	125	3-18
CONN. BROWN HARBOR	15.0	50-510	3-18

NOTE - CONSULT THE CORPS OF ENGINEERS FOR CHANGING CONDITIONS SUBSEQUENT TO THE ABOVE

ARANSAS PASS

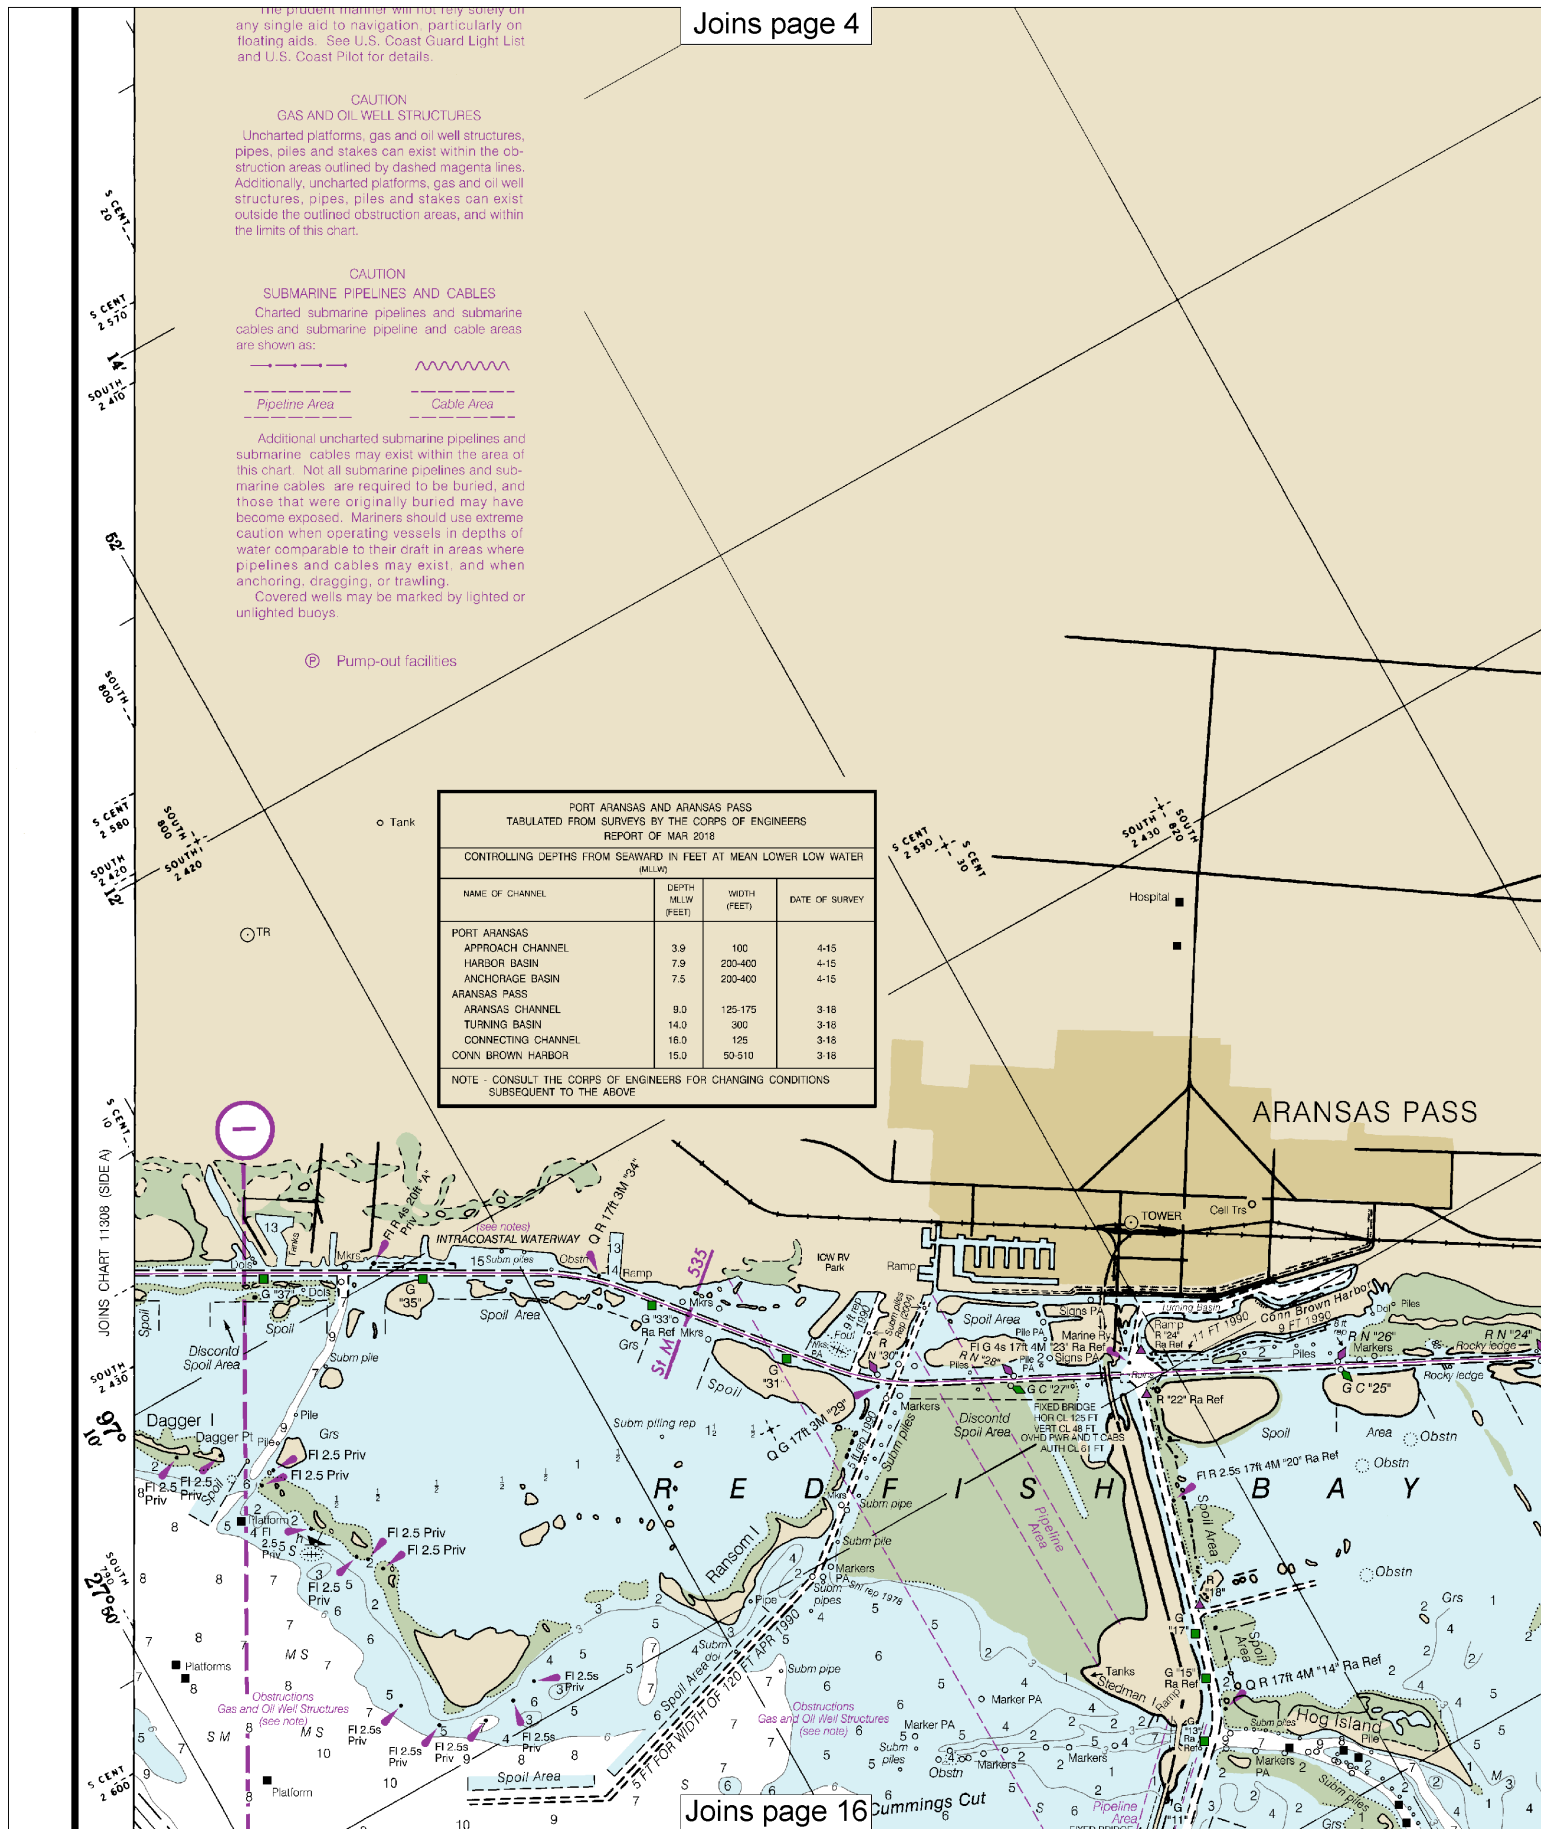

Joins page 16


10

Note: Chart grid lines are aligned with true north.

Printed at reduced scale.

SCALE 1:40,000  
Nautical Miles

See Note on page 5.



[illegible][illegible][illegible]

PORT BAY

ROCKPORT

Joins page 6

Joins page 18

PORT BAY

ROCKPORT

Joins page 6

Joins page 18

PORT BAY

ROCKPORT

Joins page 6

Joins page 18

Joins page 6

PORT BAY

Italian Bend

Rockport

Joins page 18

[illegible]

Joins page 6

PORT BAY

Italian Bend

Rockport

Palm Harbor

Cove Harbor

Talley Island

Traylor Island


Joins page 18

Joins page 6

PORT BAY

ROCKPORT


Joins page 18

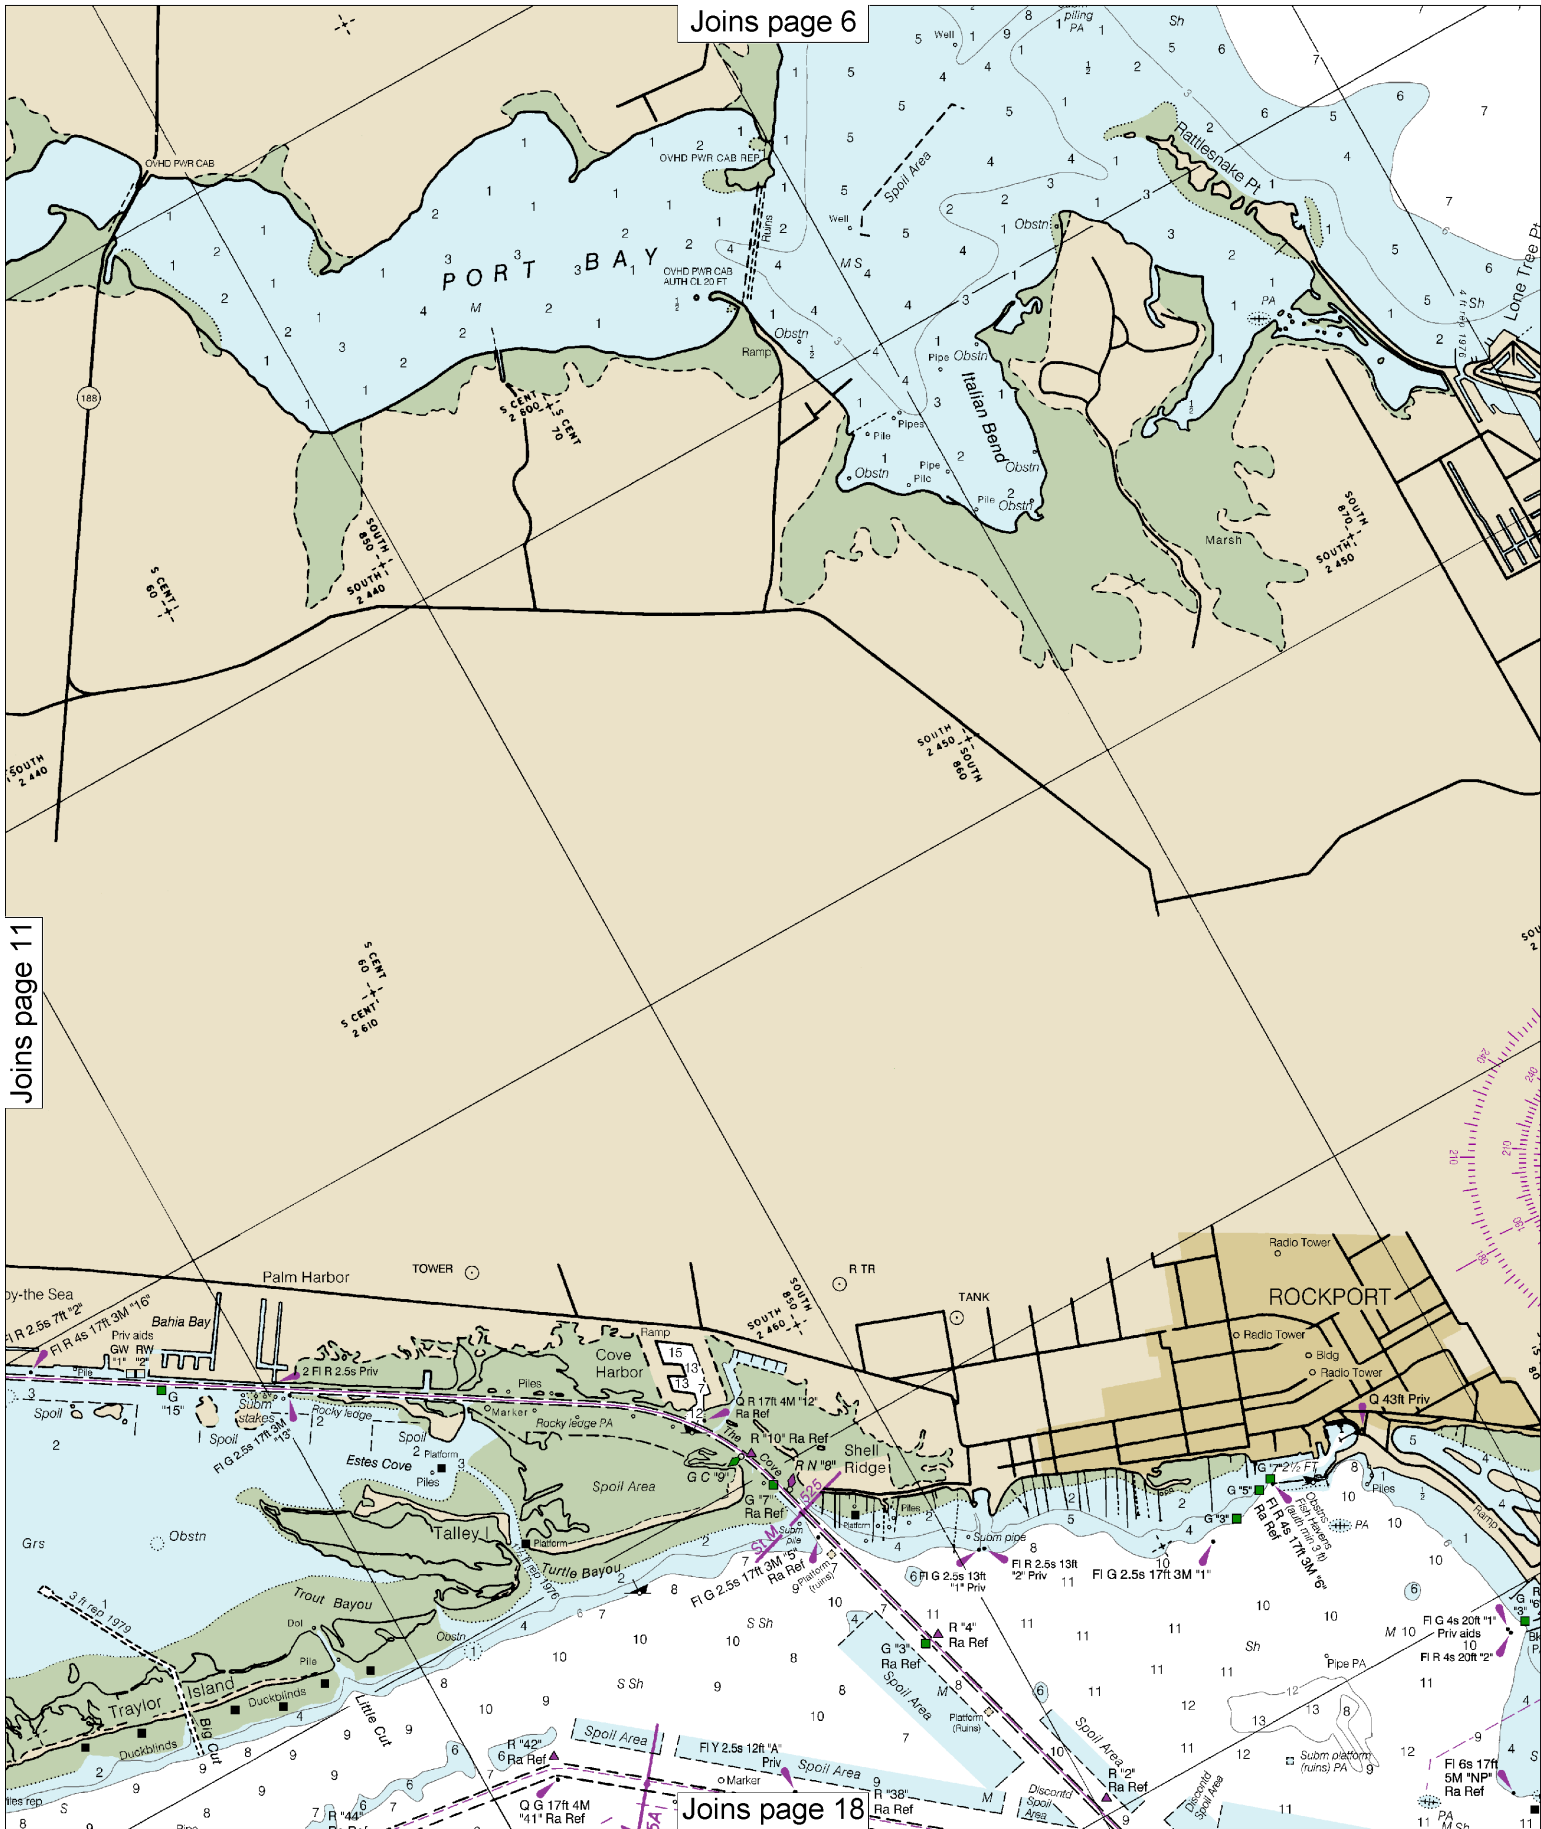







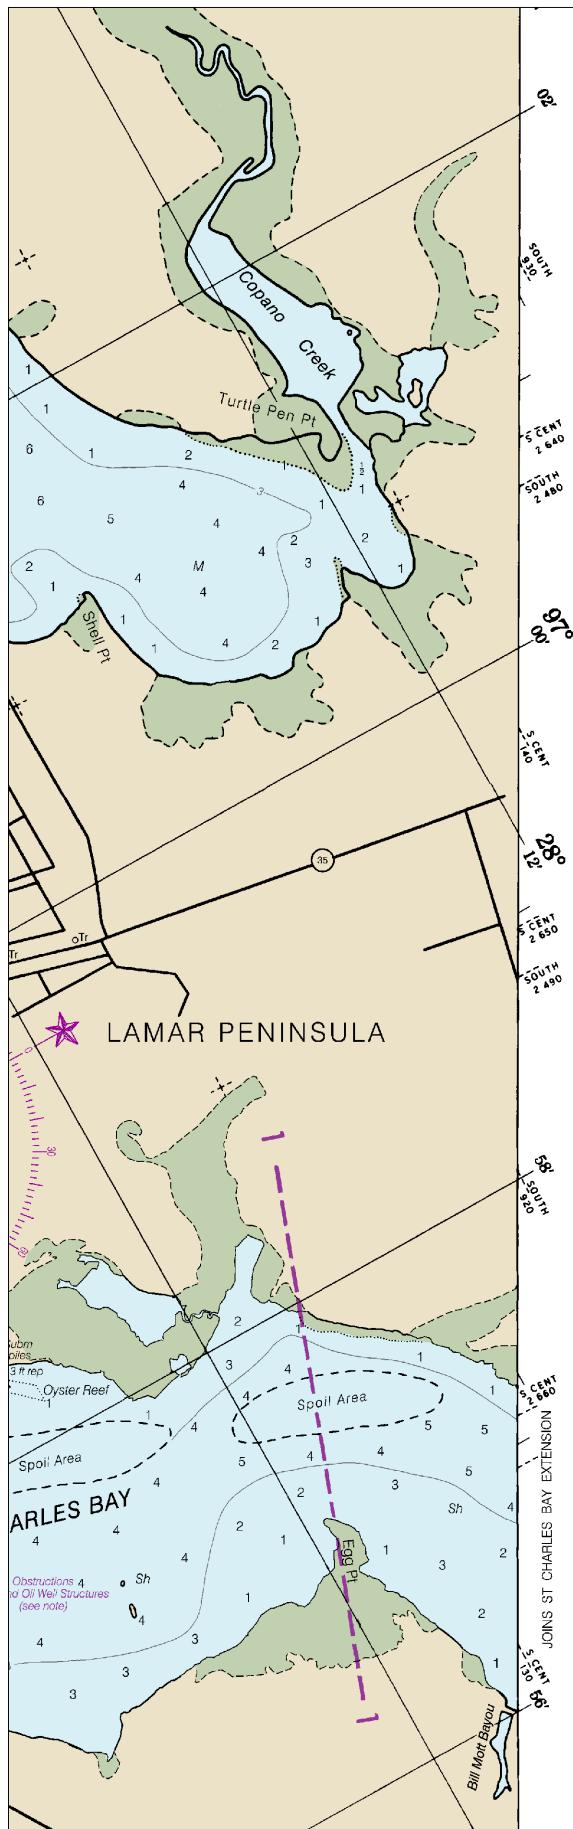

**Joins page 9** (with additional information, Geological Survey, and U.S. Coast Guard.)

**SUPPLEMENTAL INFORMATION**  
Consult U.S. Coast Pilot 5 for important supplemental information.

**RADAR REFLECTORS**  
Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

**ACKNOWLEDGMENT**  
The National Ocean Service acknowledges the exceptional cooperation received from members of the Coastal Bend Power Squadron, District 21 United States Power Squadrons, in continually providing essential information for revising this chart.

**POLLUTION REPORTS**  
Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

**NOAA WEATHER RADIO BROADCASTS**  
The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Corpus Christi, TX	KHB-41	162.550 MHz
Port O'Connor, TX	WXL-26	162.475 MHz

**HORIZONTAL DATUM**  
The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 1.063" northward and 0.964" westward to agree with this chart.


**AIDS TO NAVIGATION**  
Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

**TIDAL INFORMATION**  
Near real time water level data, predictions and weather data are available via the Internet at <http://tidesandcurrents.noaa.gov>. Annual predictions of the rise and fall of the tides are available in printed form from private sector printers.

**CAUTION**  
Limitations on the use of radio signals as aids to marine navigation can be found in the U.S. Coast Guard Light Lists and National Geospatial-Intelligence Agency Publication 117. Radio direction-finder bearings to commercial broadcasting stations are subject to error and should be used with caution.  
Station positions are shown thus:  
○ (Accurate location)    ◐ (Approximate location)

**MINERAL DEVELOPMENT STRUCTURES**  
Obstruction lights and sound (fog) signals are required for fixed mineral development structures shown on this chart, subject to approval by the District Commander, U.S. Coast Guard (33 CFR 67).


**HURRICANES AND TROPICAL STORMS**  
Hurricanes, tropical storms and other major storms may cause considerable damage to marine structures, aids to navigation and moored vessels, resulting in submerged debris in unknown locations.  
Charted soundings, channel depths and shoreline may not reflect actual conditions following these storms. Fixed aids to navigation may have been damaged or destroyed. Buoys may have been moved from their charted positions, damaged, sunk, extinguished or otherwise made inoperative. Mariners should not rely upon the position or operation of an aid to navigation. Wrecks and submerged obstructions may have been displaced from charted locations. Pipelines may have become uncovered or moved.  
Mariners are urged to exercise extreme caution and are requested to report aids to navigation discrepancies and hazards to navigation to the nearest United States Coast Guard unit.

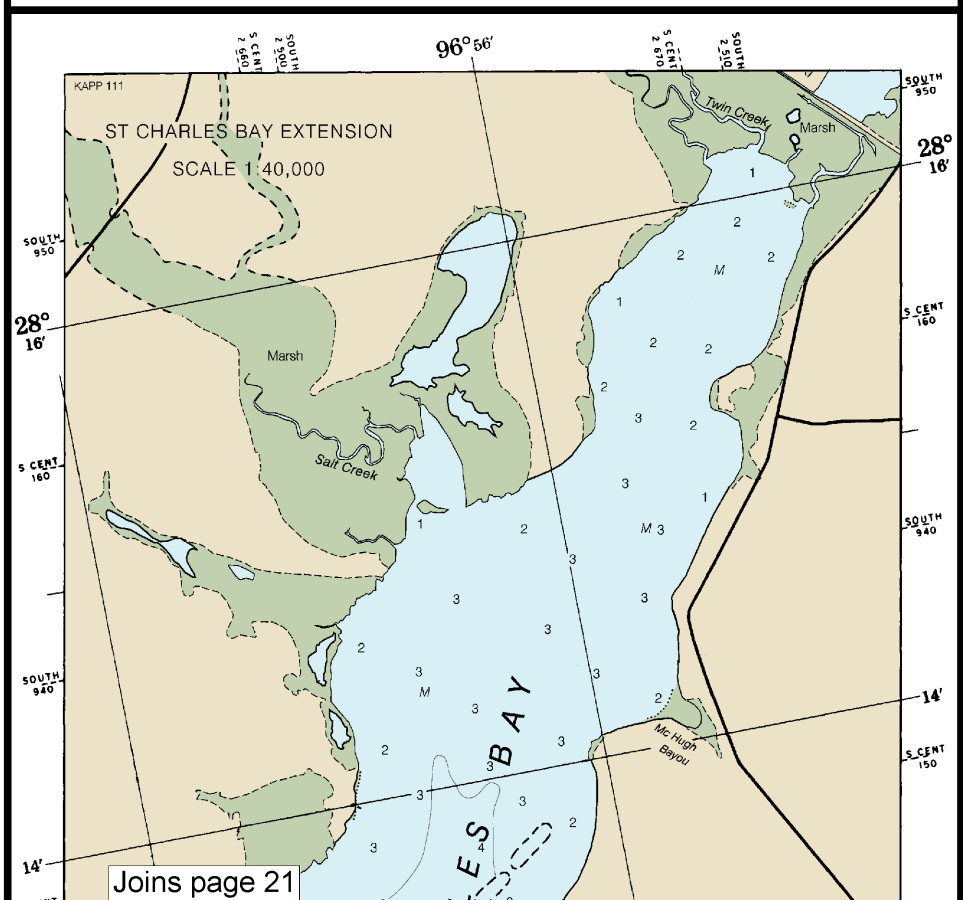








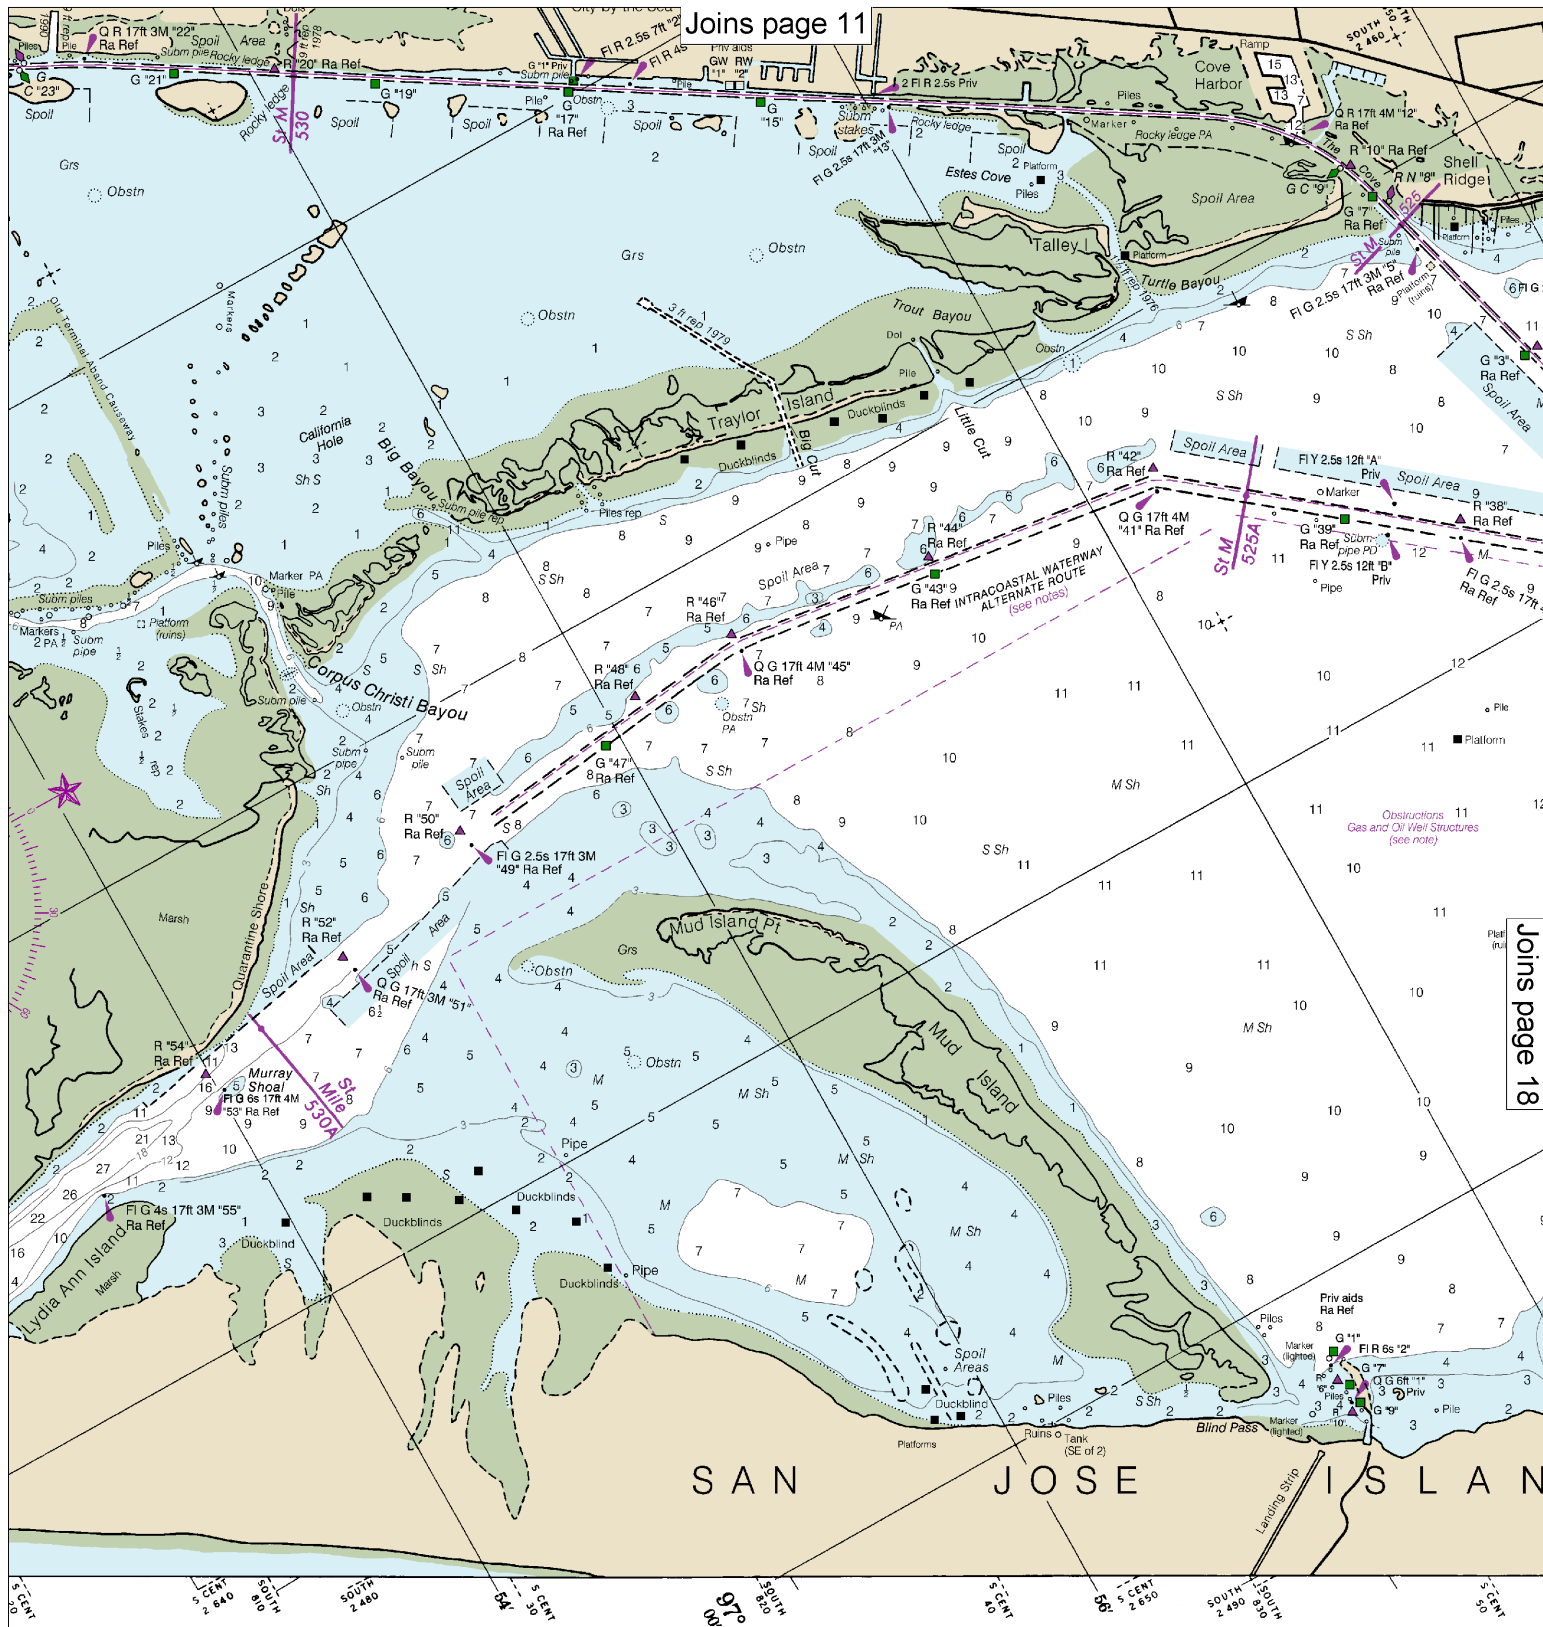


Comments  
ct.htm

SOUNDINGS IN FEET

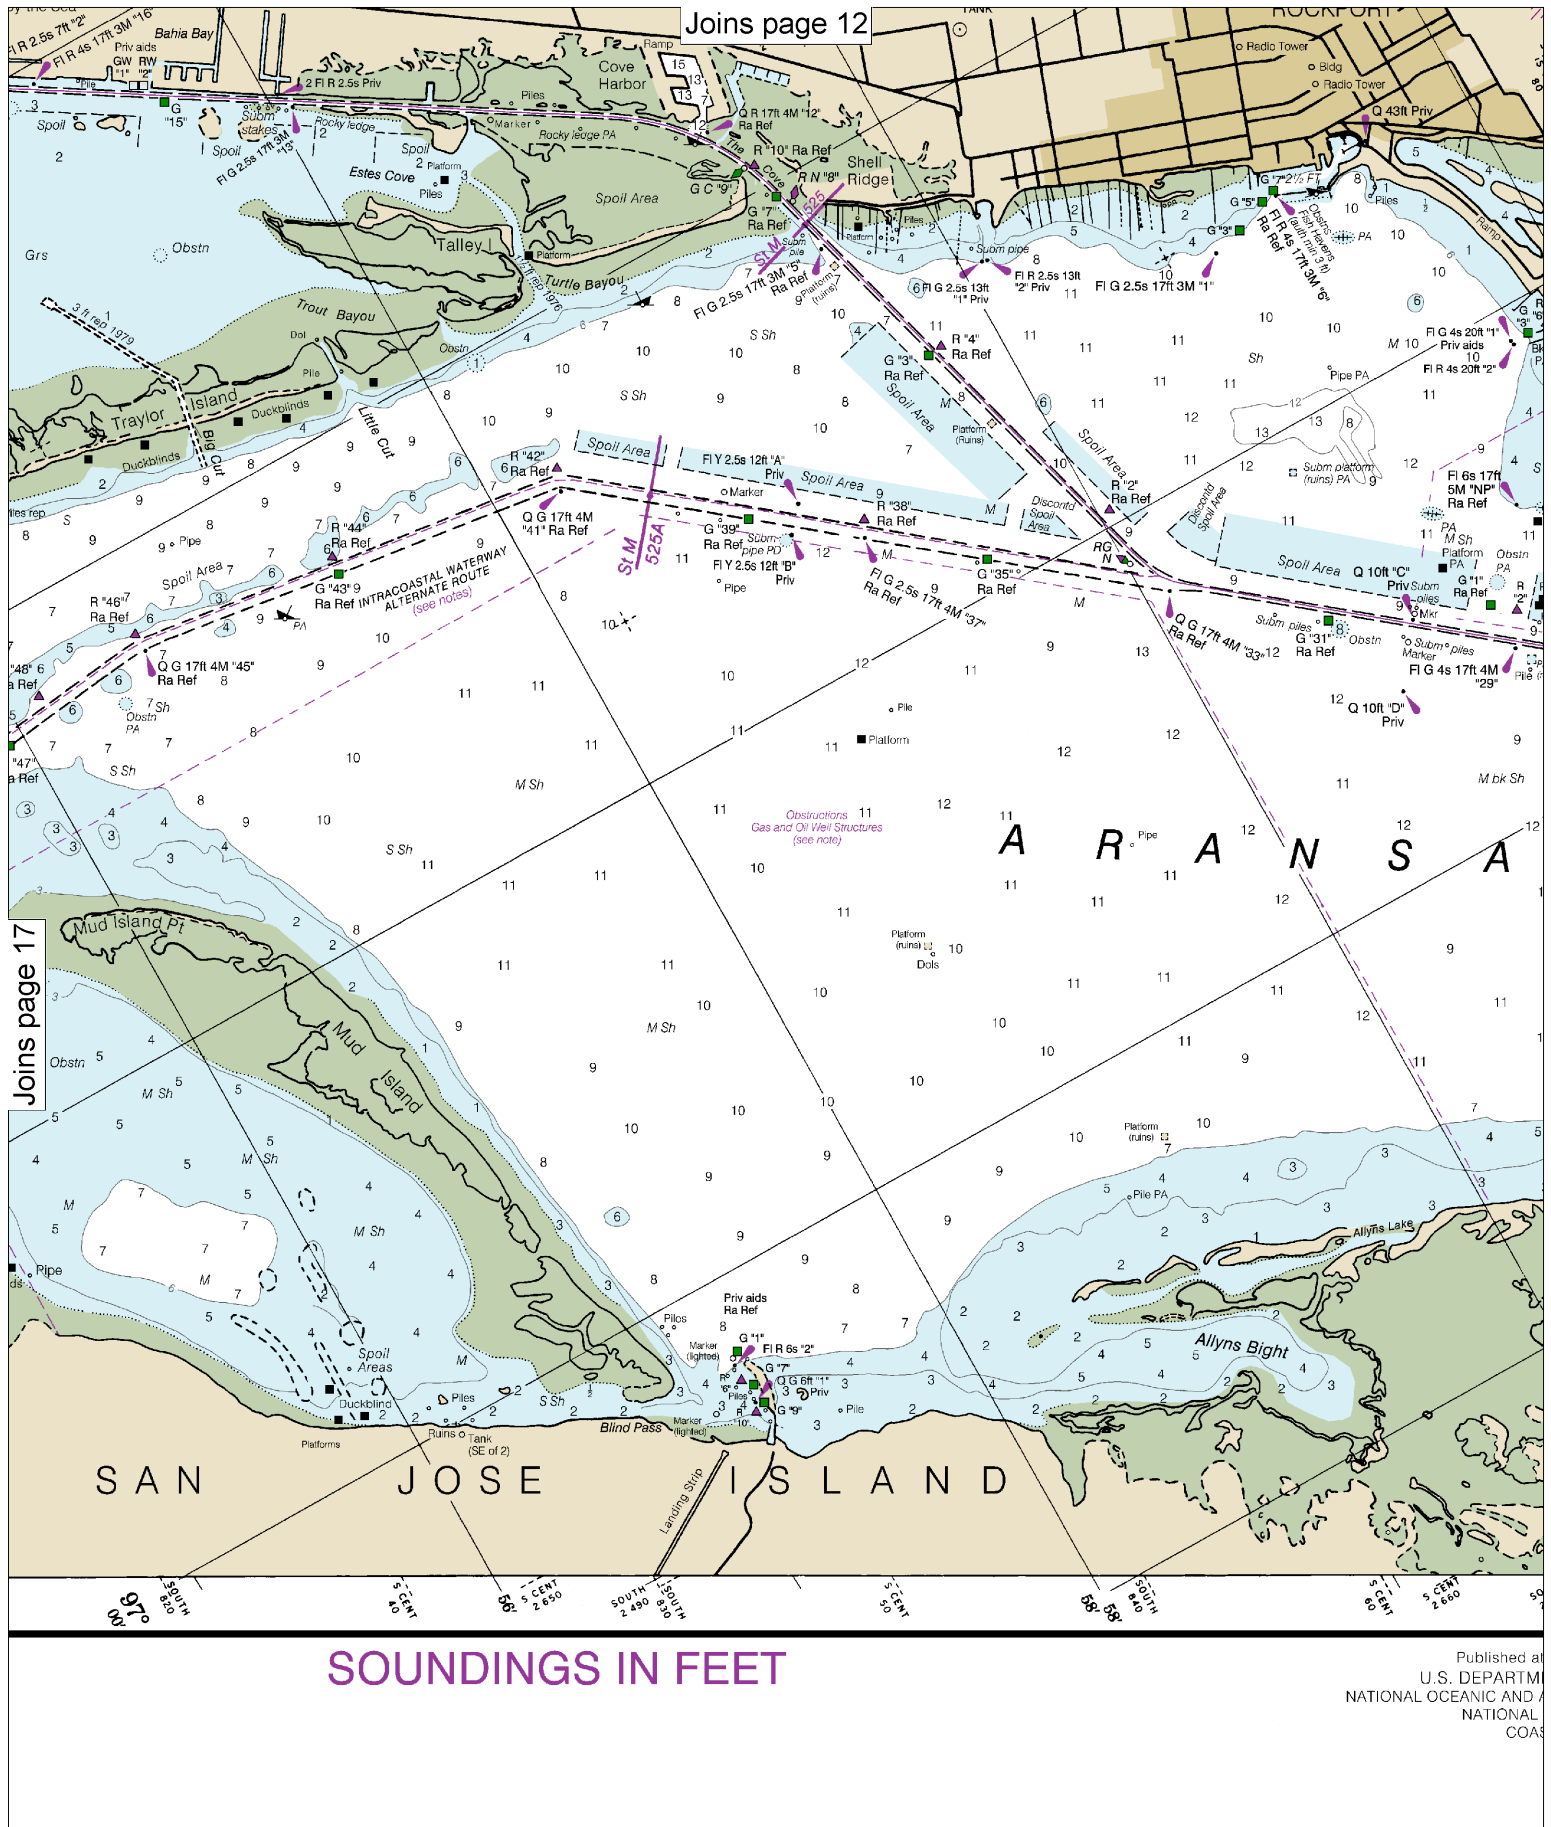



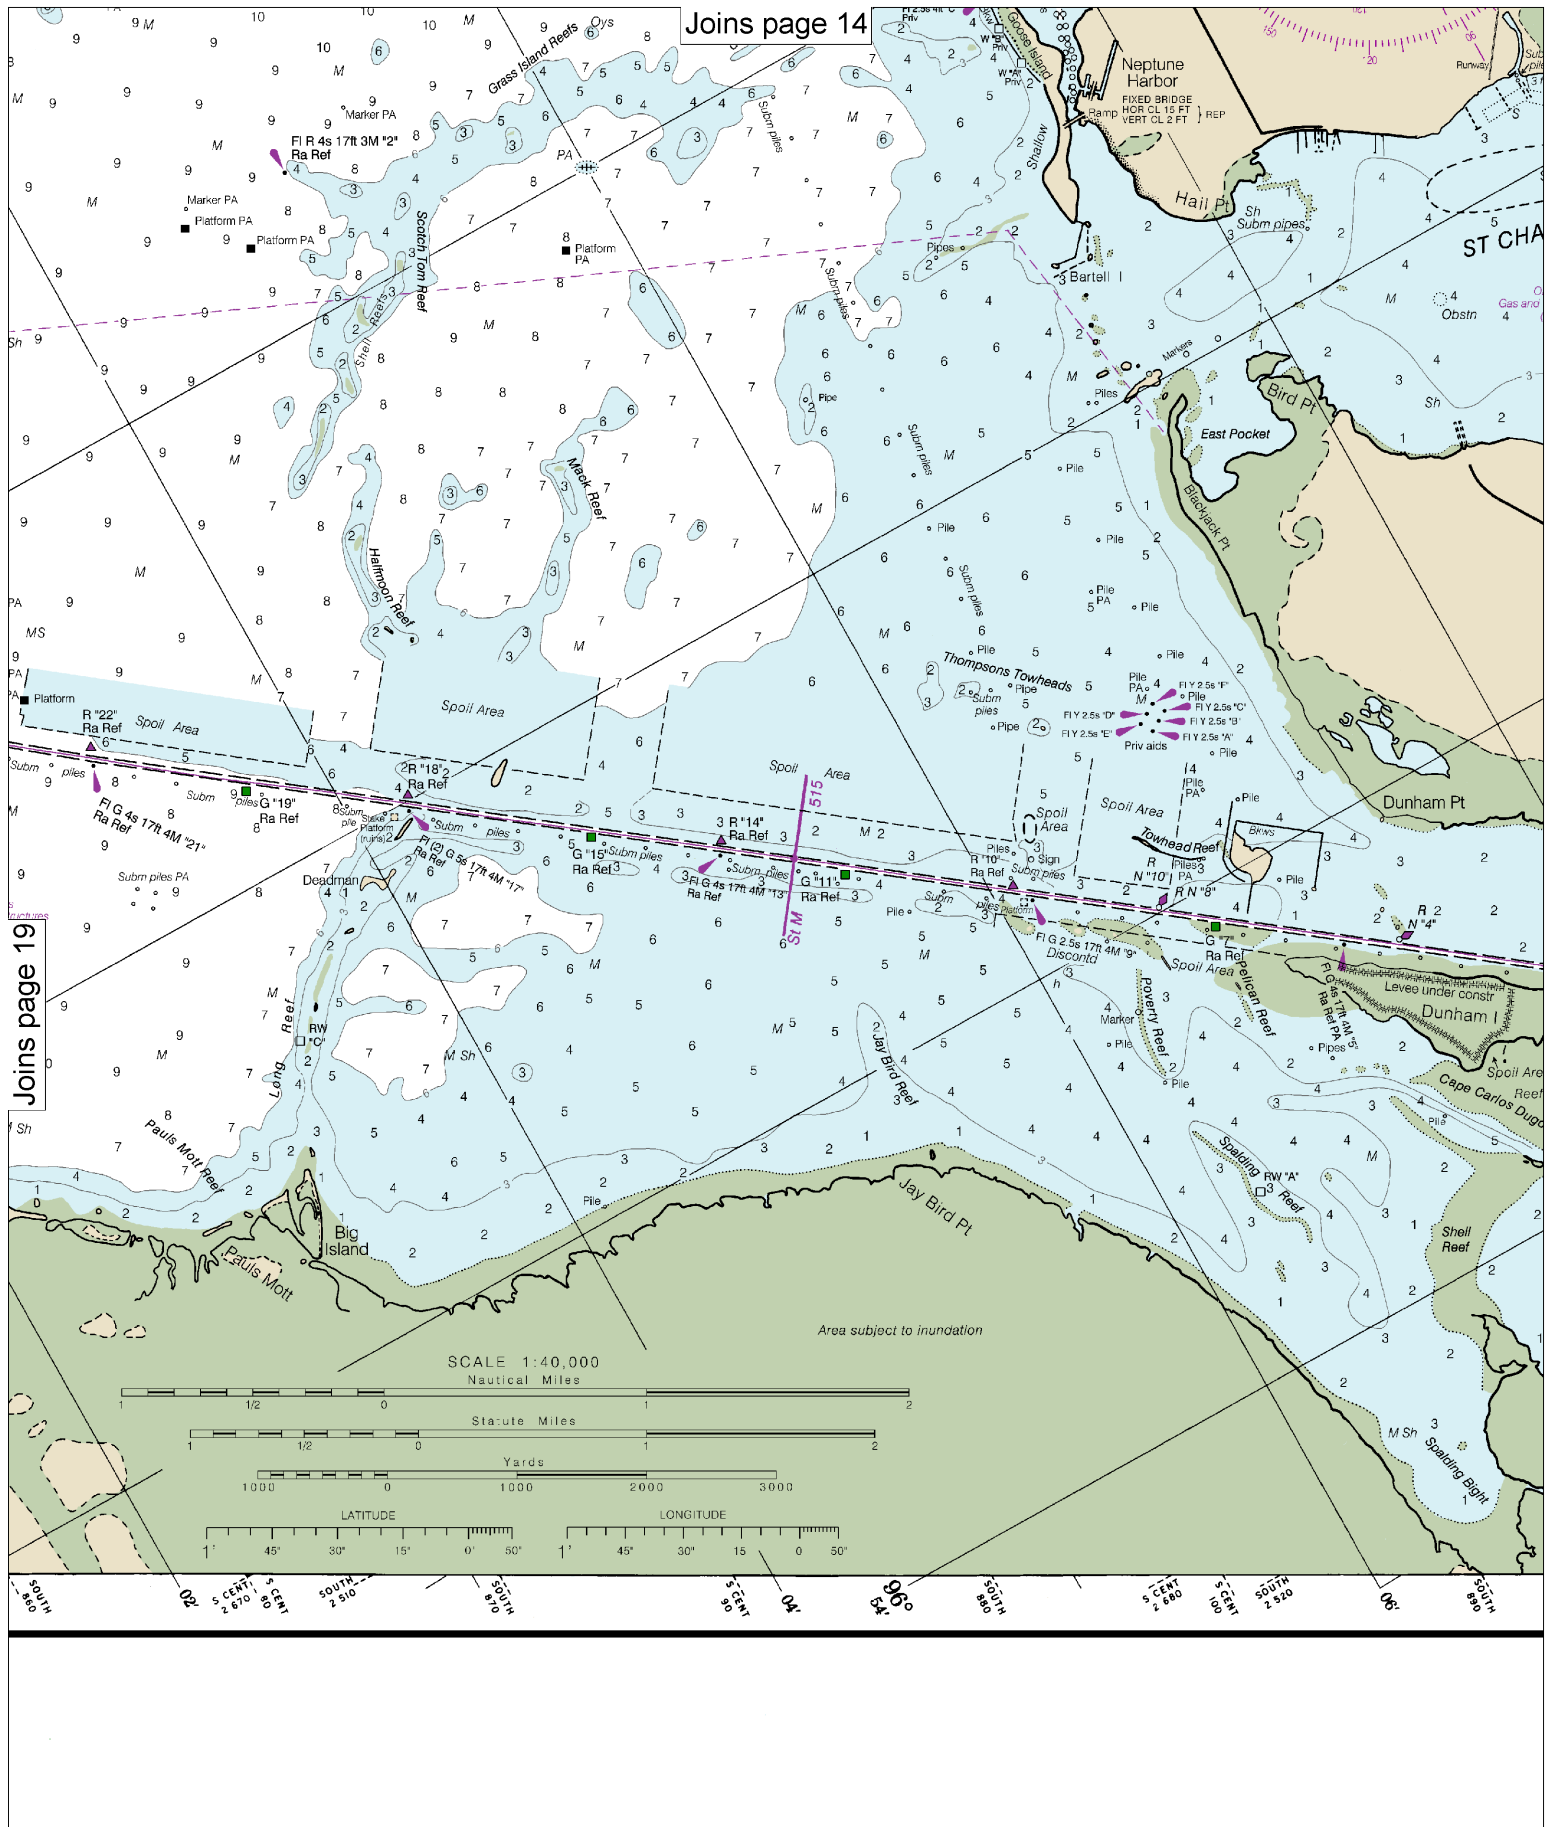


20

Note: Chart grid lines are aligned with true north.



Printed at reduced scale.

SCALE 1:40,000 Nautical Miles

See Note on page 5.





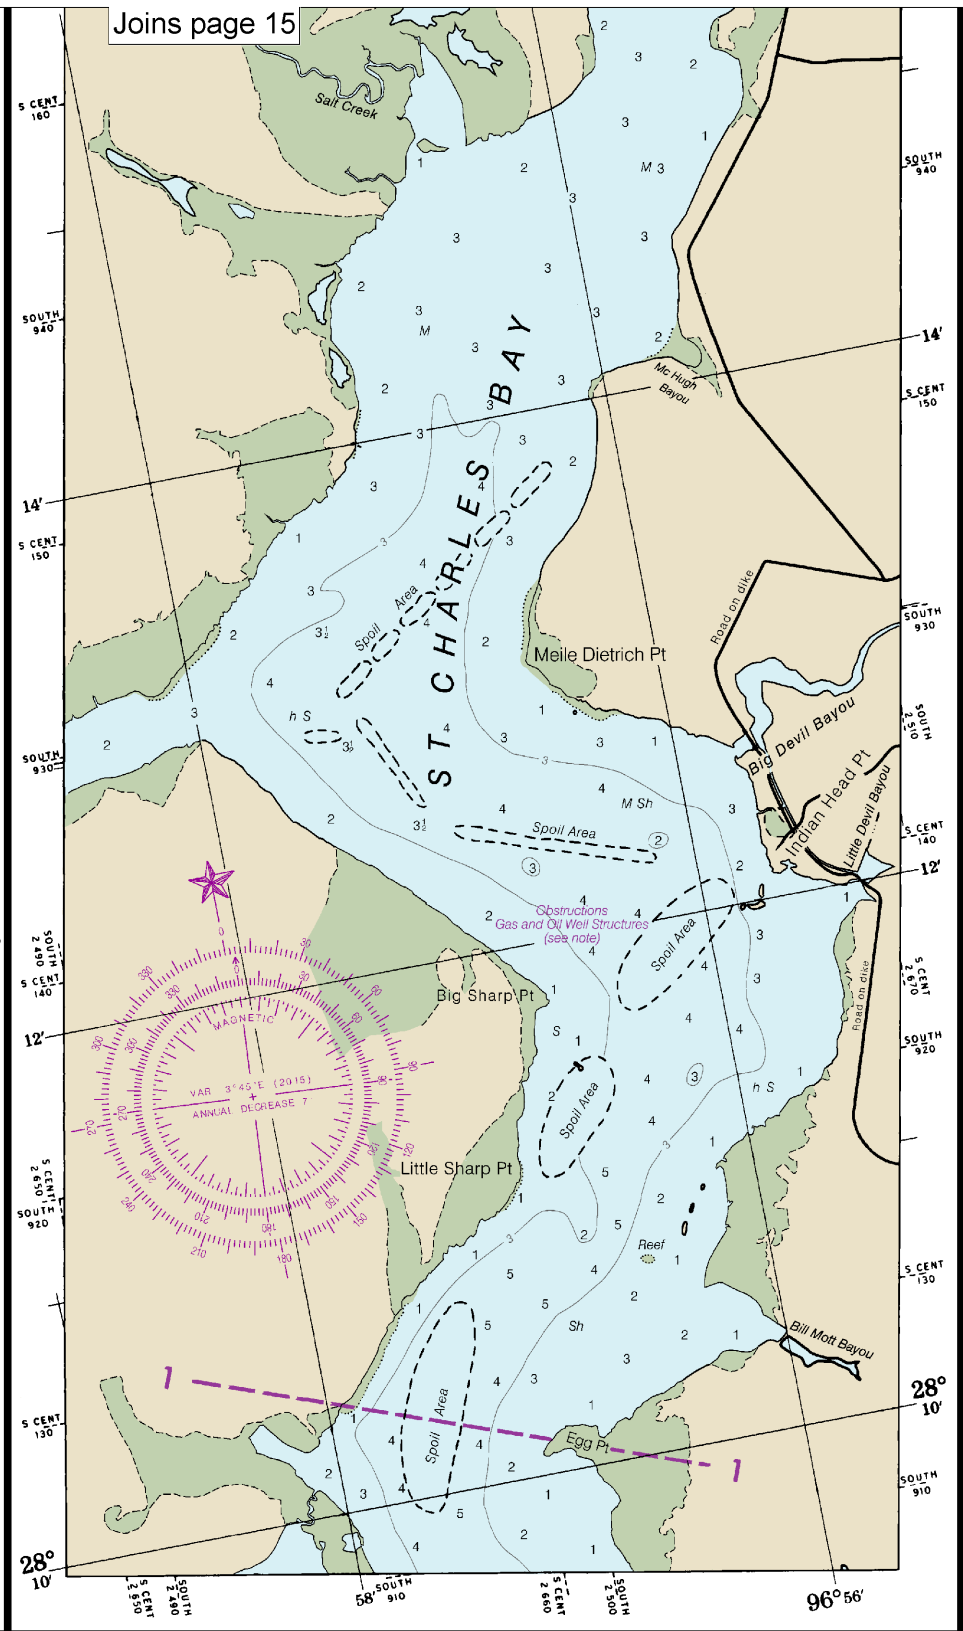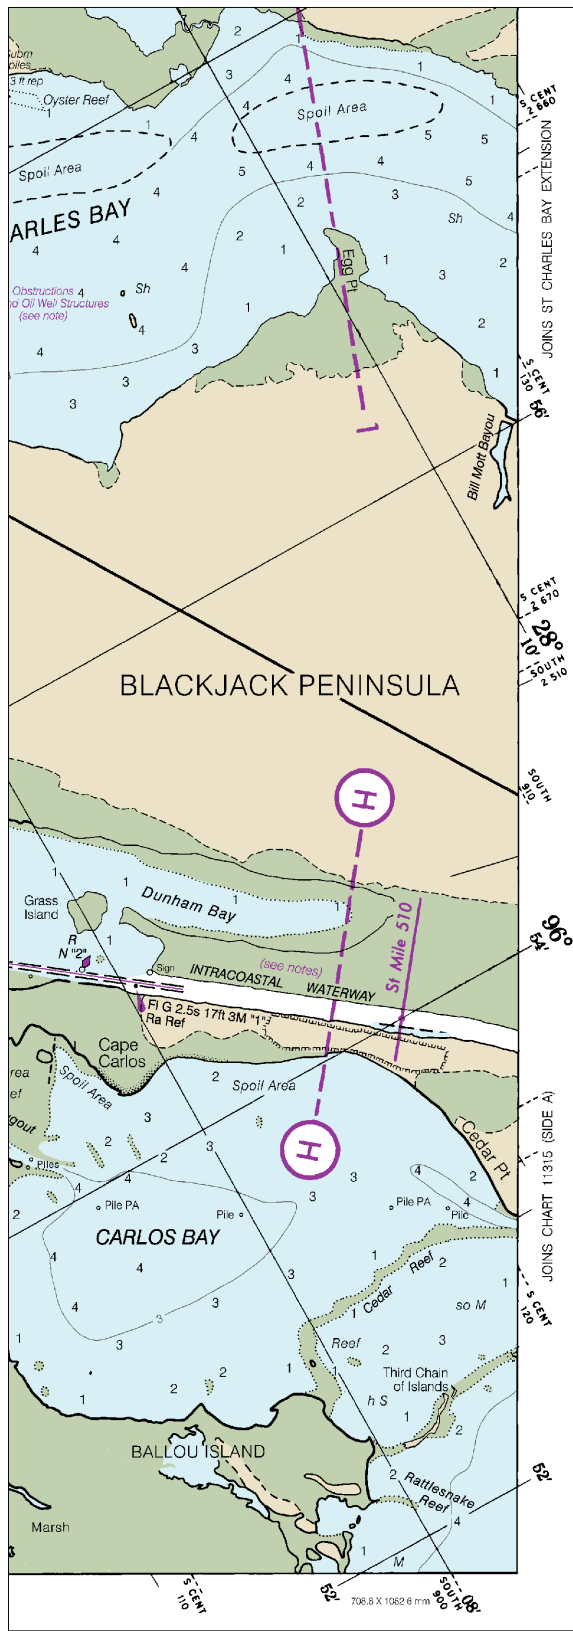

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
FEET	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102
METERS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17

Carlos Bay To Redfish Bay  
SOUNDINGS IN FEET - SCALE 1:40,000

11314



## VHF Marine Radio channels for use on the waterways:

**Channel 6** – Inter-ship safety communications.

**Channel 9** – Communications between boats and ship-to-coast.

**Channel 13** – Navigation purposes at bridges, locks, and harbors.

**Channel 16** – Emergency, distress and safety calls to Coast Guard and others, and to initiate calls to other

vessels. Contact the other vessel, agree to another channel, and then switch.

**Channel 22A** – Calls between the Coast Guard and the public. Severe weather warnings, hazards to navigation and safety warnings are broadcast here.

**Channels 68, 69, 71, 72 and 78A** – Recreational boat channels.

**Getting and Giving Help** — Signal other boaters using visual distress signals (flares, orange flag, lights, arm signals); whistles; horns; and on your VHF radio. You are required by law to help boaters in trouble. Respond to distress signals, but do not endanger yourself.



**NOAA Weather Radio All Hazards (NWR)** is a nationwide network of radio stations broadcasting continuous weather information directly from the nearest National Weather Service office. NWR broadcasts official Weather Service warnings, watches, forecasts and other hazard information 24 hours a day, 7 days a week.

<http://www.nws.noaa.gov/nwr/>

## Distress Call Procedures

- Make sure radio is on.
- Select Channel 16.
- Press/Hold the transmit button.
- Clearly say: "MAYDAY, MAYDAY, MAYDAY."
- Also give: Vessel Name and/or Description; Position and/or Location; Nature of Emergency; Number of People on Board.
- Release transmit button.
- Wait for 10 seconds — If no response Repeat MAYDAY call.

**HAVE ALL PERSONS PUT ON LIFE JACKETS!**

## Quick References

Nautical chart related products and information	— <a href="http://www.nauticalcharts.noaa.gov">http://www.nauticalcharts.noaa.gov</a>
Interactive chart catalog	— <a href="http://www.charts.noaa.gov/InteractiveCatalog/nrnc.shtml">http://www.charts.noaa.gov/InteractiveCatalog/nrnc.shtml</a>
Report a chart discrepancy	— <a href="http://ocsddata.ncd.noaa.gov/idrs/discrepancy.aspx">http://ocsddata.ncd.noaa.gov/idrs/discrepancy.aspx</a>
Chart and chart related inquiries and comments	— <a href="http://ocsddata.ncd.noaa.gov/idrs/inquiry.aspx?frompage=ContactUs">http://ocsddata.ncd.noaa.gov/idrs/inquiry.aspx?frompage=ContactUs</a>
Chart updates (LNM and NM corrections)	— <a href="http://www.nauticalcharts.noaa.gov/mcd/updates/LNM_NM.html">http://www.nauticalcharts.noaa.gov/mcd/updates/LNM_NM.html</a>
Coast Pilot online	— <a href="http://www.nauticalcharts.noaa.gov/nsd/cpdownload.htm">http://www.nauticalcharts.noaa.gov/nsd/cpdownload.htm</a>
Tides and Currents	— <a href="http://tidesandcurrents.noaa.gov">http://tidesandcurrents.noaa.gov</a>
Marine Forecasts	— <a href="http://www.nws.noaa.gov/om/marine/home.htm">http://www.nws.noaa.gov/om/marine/home.htm</a>
National Data Buoy Center	— <a href="http://www.ndbc.noaa.gov/">http://www.ndbc.noaa.gov/</a>
NowCoast web portal for coastal conditions	— <a href="http://www.nowcoast.noaa.gov/">http://www.nowcoast.noaa.gov/</a>
National Weather Service	— <a href="http://www.weather.gov/">http://www.weather.gov/</a>
National Hurricane Center	— <a href="http://www.nhc.noaa.gov/">http://www.nhc.noaa.gov/</a>
Pacific Tsunami Warning Center	— <a href="http://ptwc.weather.gov/">http://ptwc.weather.gov/</a>
Contact Us	— <a href="http://www.nauticalcharts.noaa.gov/staff/contact.htm">http://www.nauticalcharts.noaa.gov/staff/contact.htm</a>



— For the latest news from Coast Survey, follow **@NOAAcharts**



This Booklet chart has been designed for duplex printing (printed on front and back of one sheet). If a duplex option is not available on your printer, you may print each sheet and arrange them back-to-back to allow for the proper layout when viewing.