

PHOTOFACT[®] with CIRCUITRACE[®]

For Supplier Address See PHOTOFACT Index

NOTE

ONLY THOSE PERSONS PROPERLY LICENSED ARE PERMITTED TO MAKE REPAIRS OR ADJUSTMENTS WHICH MAY RESULT IN ILLEGAL OPERATION. (REFER TO FCC RULES AND REGULATIONS PART 95, SUBPARTS C & D.)

The frequency of the transmitter should be checked periodically with a secondary frequency standard to insure proper and legal operation.

Best results will be obtained when adjusting the final RF output circuit if the antenna normally used is connected and the chassis is as nearly in the cabinet as possible.

Connect either 50-ohm dummy load or the normally used antenna system.



MODEL COM-PHONE 23 (99-33011W)

ALIGNMENT INSTRUCTIONS

Suggested Alignment Tools: GC ELECTRONICS
L12, L13, L14, L15, L16 5000, 8290
ALL Other Tunable Transformers and Coils 9440

LAFAYETTE MODEL COM-PHONE 23

RECEIVER

Connect an AC VTVM or AF Wattmeter across speaker voice coil.
Adjustments made with 14-volt DC input.
Adjust volume control to obtain suitable reading.

SIGNAL GENERATOR	GEN FREQ	CHANNEL	ADJUST	REMARKS
High side thru .01uF to cathode of D5, low side to ground.	455kHz, 1000Hz @ 30% modulation.	Any	L14, L15, L16	Set generator output to maintain 0.5V audio across speaker voice coil. Adjust for maximum.
High side thru .01uF to antenna jack, low side to ground.	27.115MHz, 1000Hz @ 30% modulation, output 1uV.	13	L9, L10, L11, L12, L13	Adjust for maximum.

HOWARD W. SAMS & CO., INC. Indianapolis, Indiana 46206

© 1975 Howard W. Sams & Co., Inc. Printed in U. S. of America 5CY245

RECEIVER ADJUSTMENTS

Connect an AC VTVM or AF Wattmeter across speaker voice coil.
These adjustments made with 14-volt DC input.
Adjust volume control to obtain a suitable reading.

SIGNAL GENERATOR	GEN FREQ	CHANNEL	ADJUST	REMARKS
SQUELCH RANGE High side thru .01uF to antenna jack, low side to ground.	27.115MHz, 1000Hz @ 30% modulation, output 10,000uV.	13	VR3	Set squelch control fully clockwise. Adjust so that squelch just breaks.

TRANSMITTER


Connect an RF Wattmeter or 50-ohm, 25-watt dummy load to antenna connector.
Adjustments made with 14-volt DC input.

INDICATOR	ADJUST	REMARKS
OSCILLATOR, MIXER, BUFFER, DRIVER, FINAL RF Wattmeter	L1,L2,L3, L4,L5,L6	Channel selector to CH 13. Key transmitter. Adjust for maximum.
TVI TRAP TV (Ch. 2)	L17	Key transmitter. Adjust for MINIMUM interference on TV.
FINAL INPUT POWER Connect 0-1000 DC milliammeter between RFC2 and D12.	L7,L8	Adjust for 5 watts (maximum).


TRANSMITTER ADJUSTMENTS

Connect an RF Wattmeter or 50-ohm, 25-watt dummy load to antenna connector.
Adjustments made with 14-volt DC input.


INDICATOR	ADJUST	REMARKS
AMC Modulation Meter connected to antenna jack.	VR4	Deactivate VR4. Inject 1000Hz signal to microphone input. Set generator output for 110% modulation. Adjust VR4 for 90% modulation.

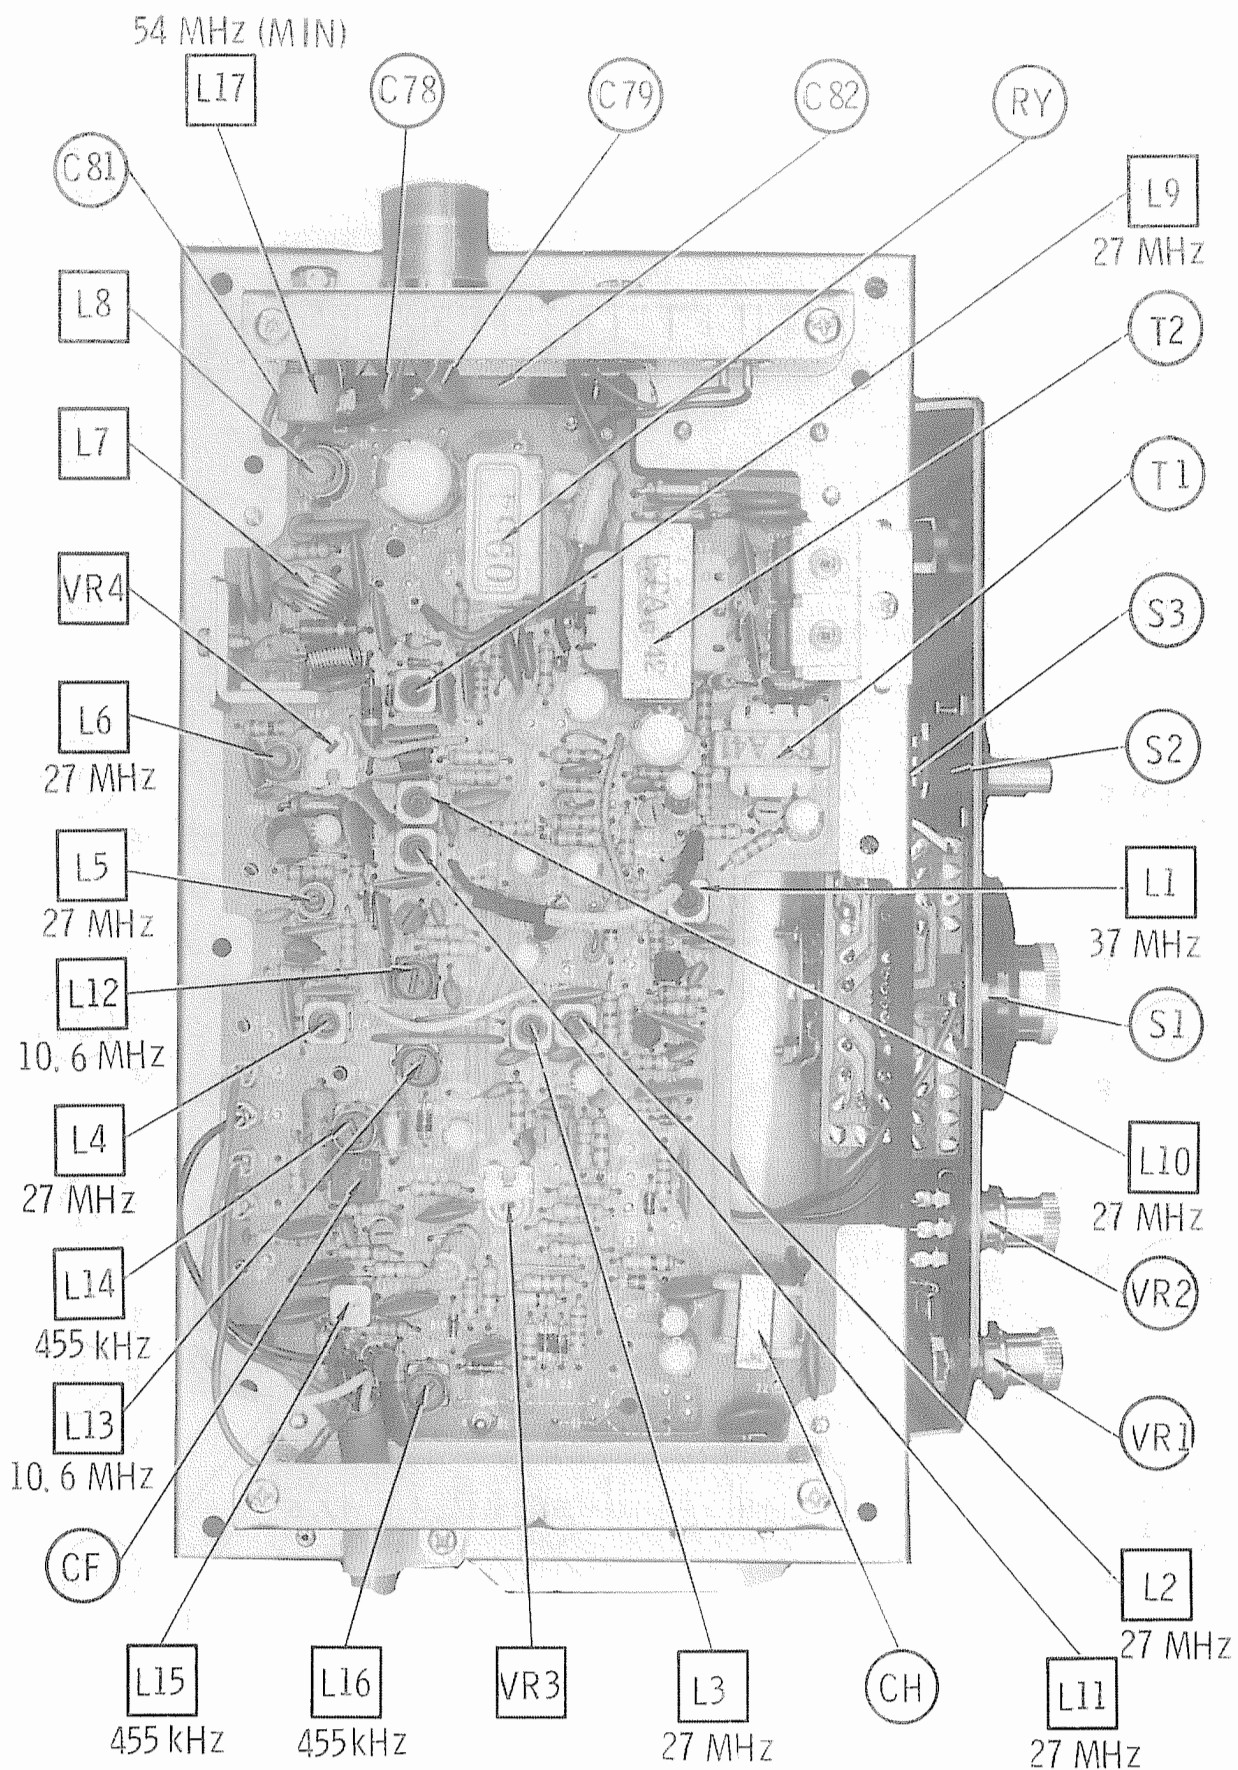


CHASSIS-TOP

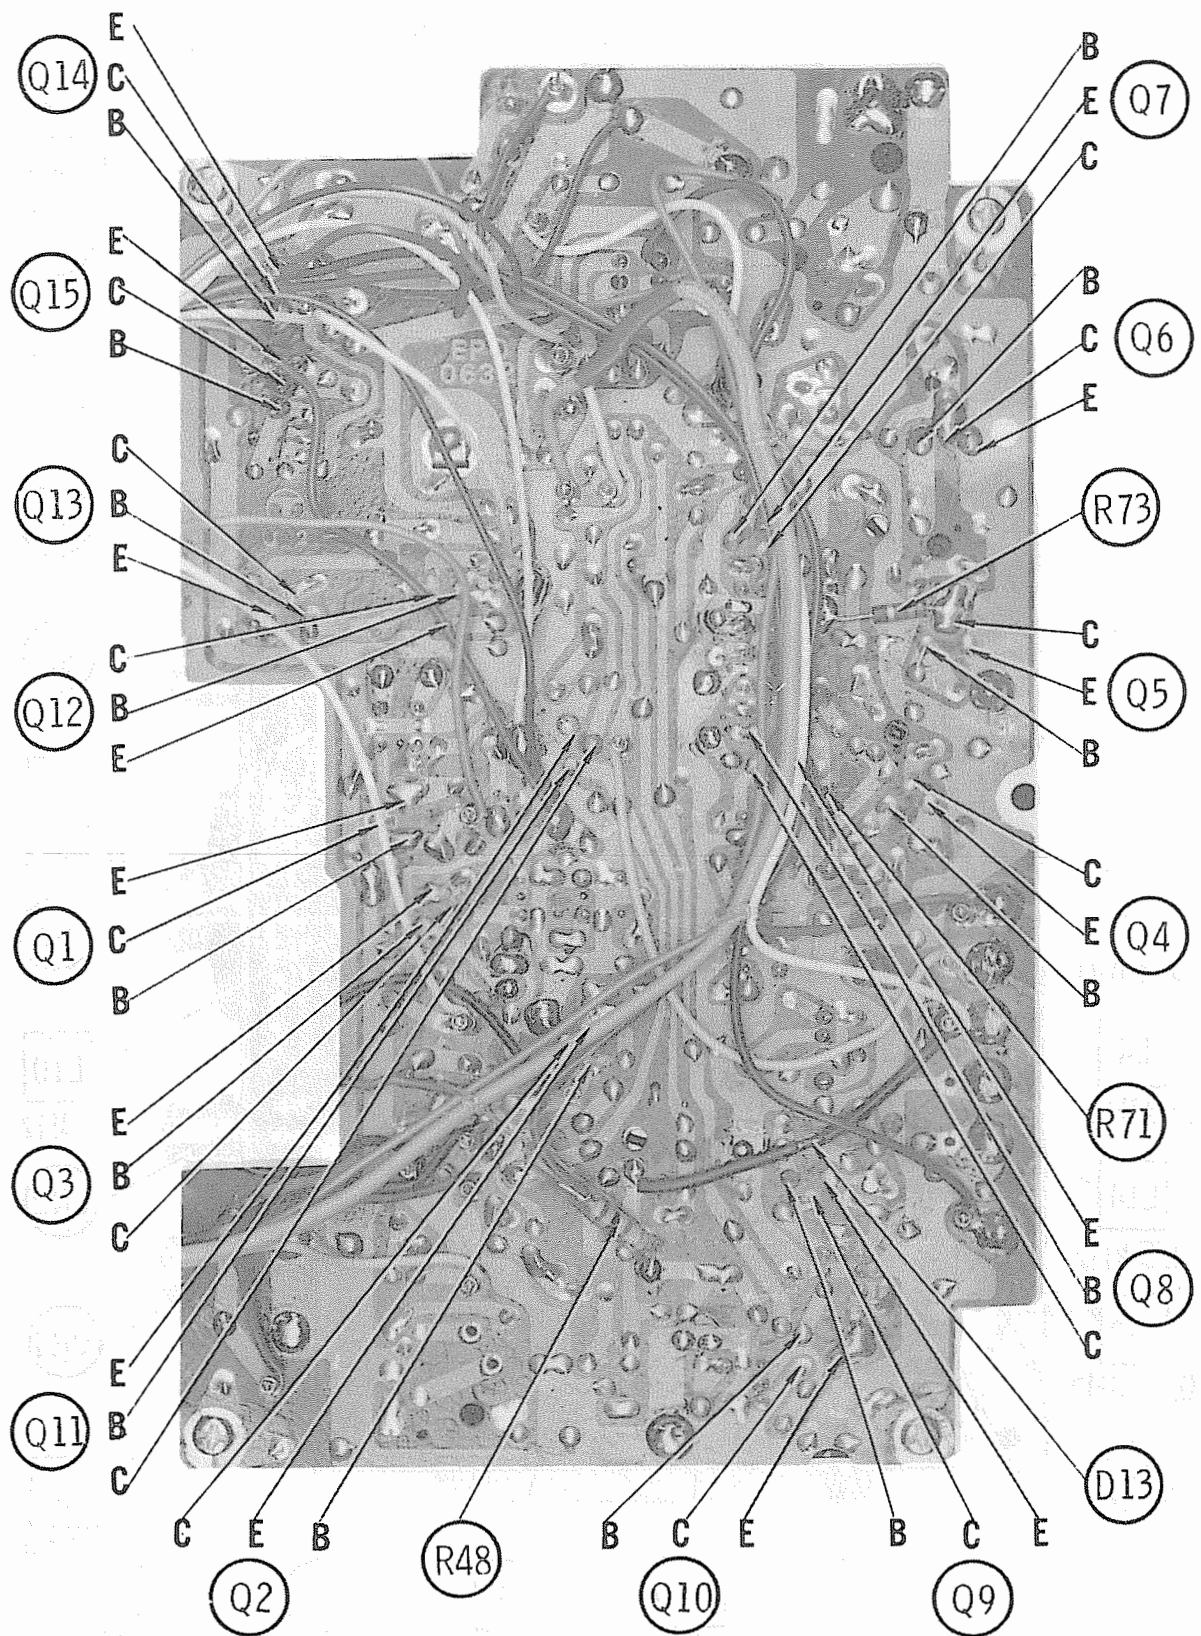


MAIN BOARD

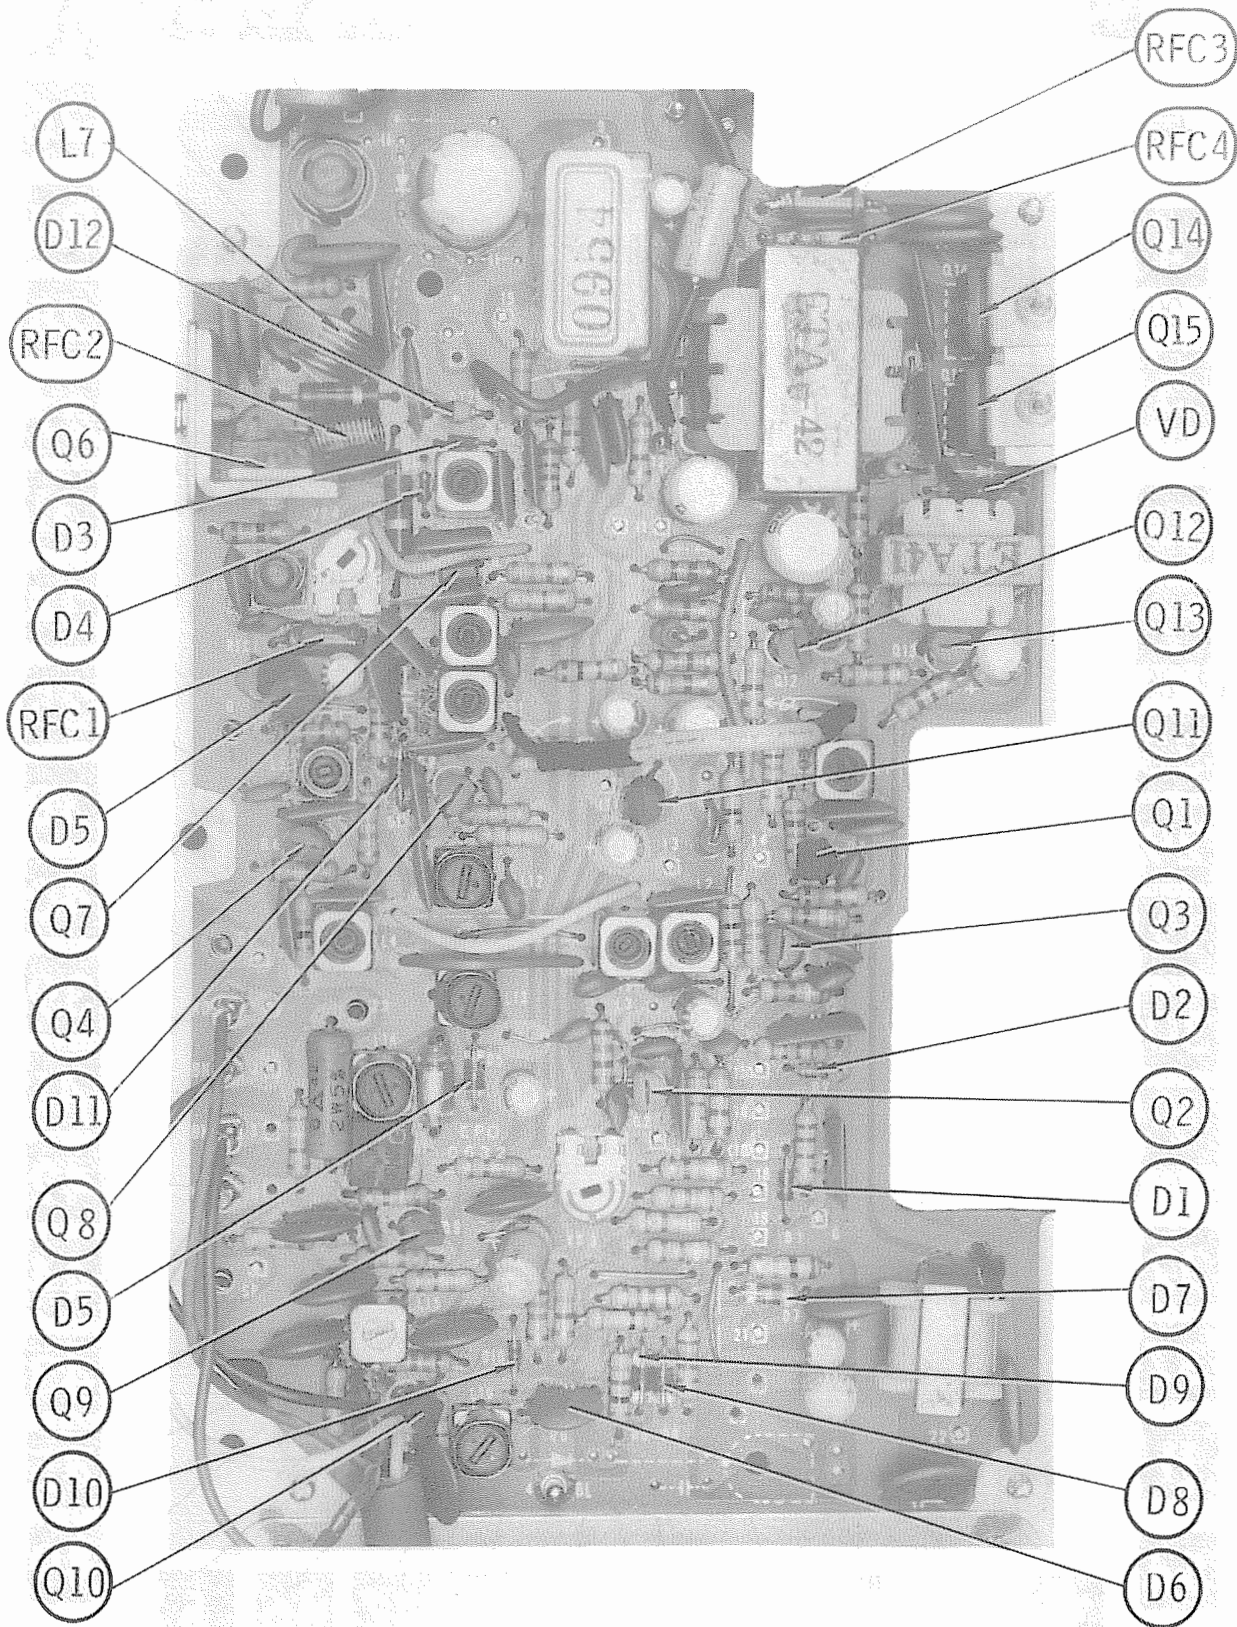

MAIN BOARD

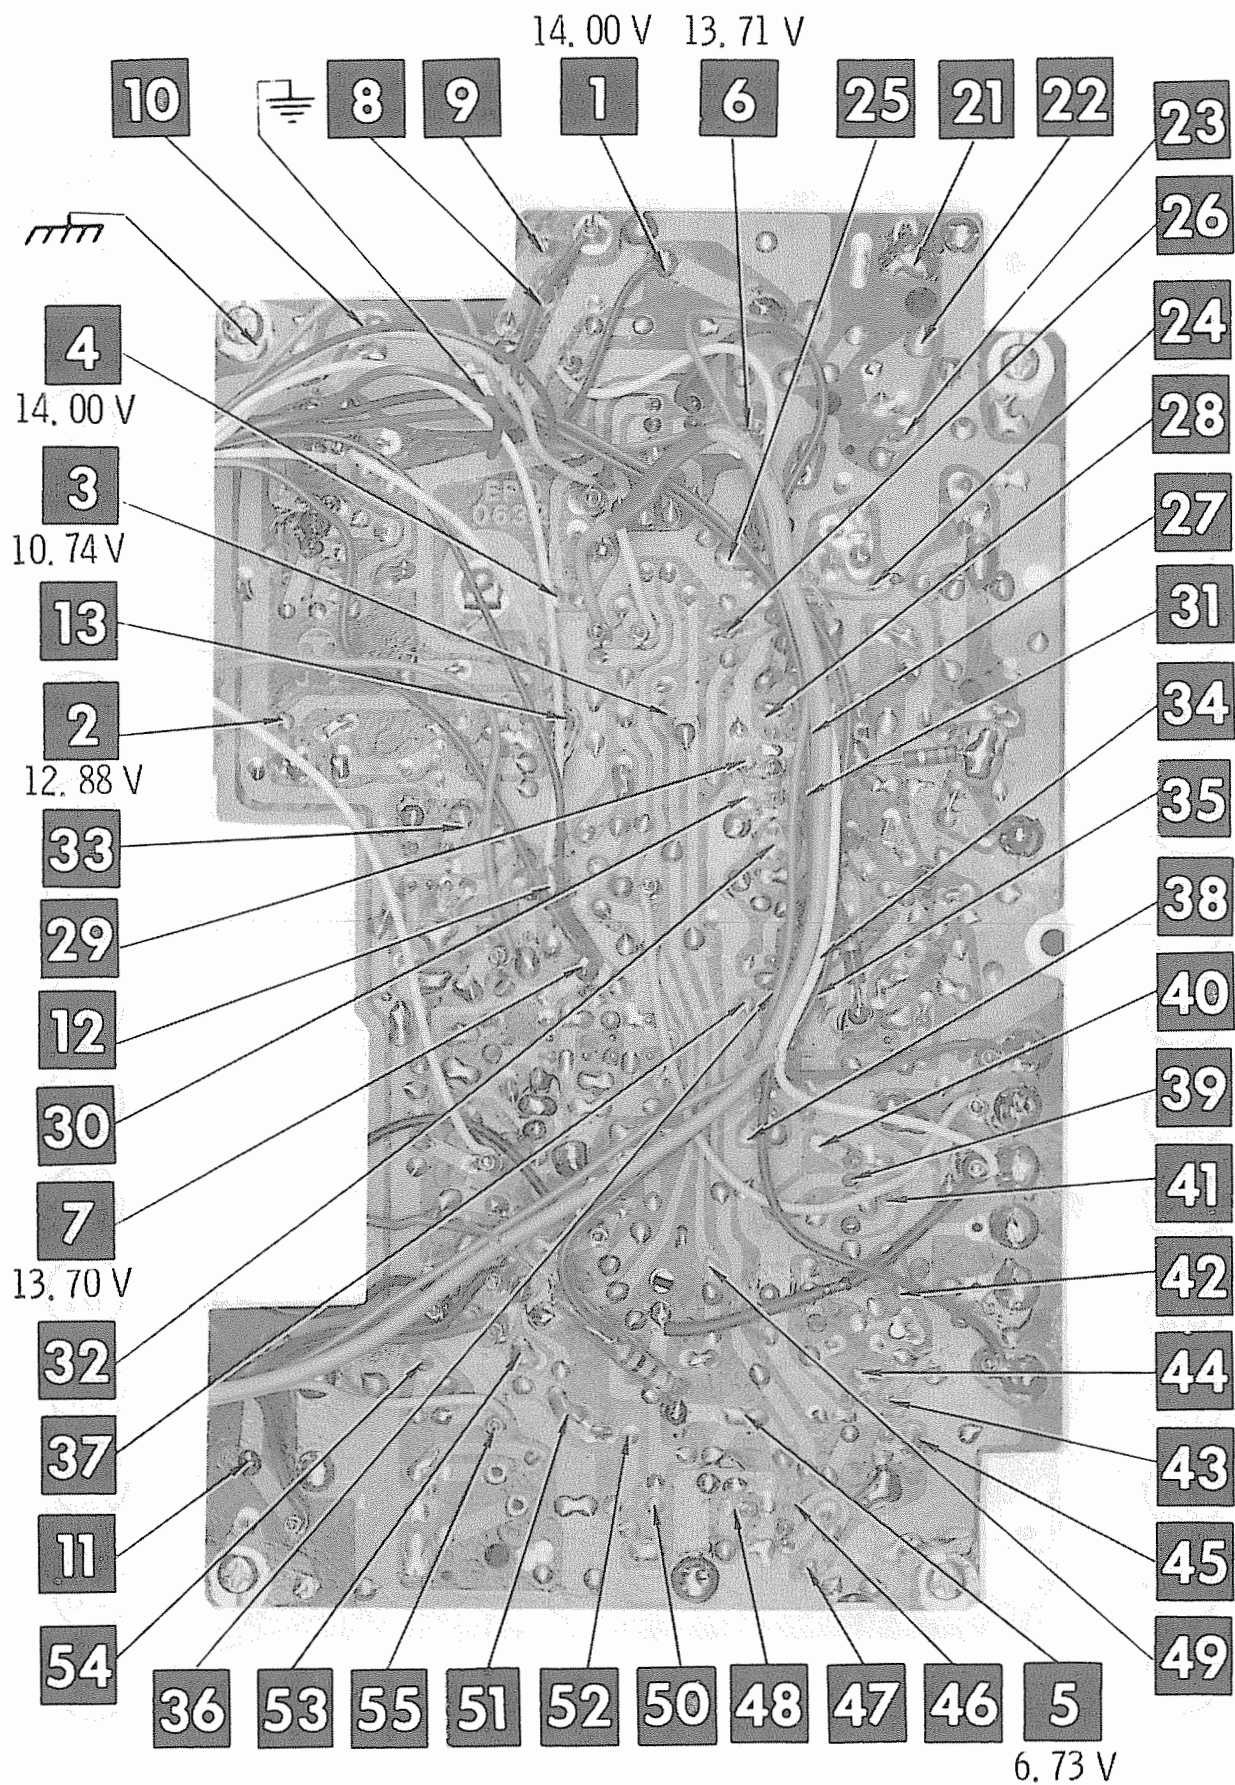


MAIN BOARD

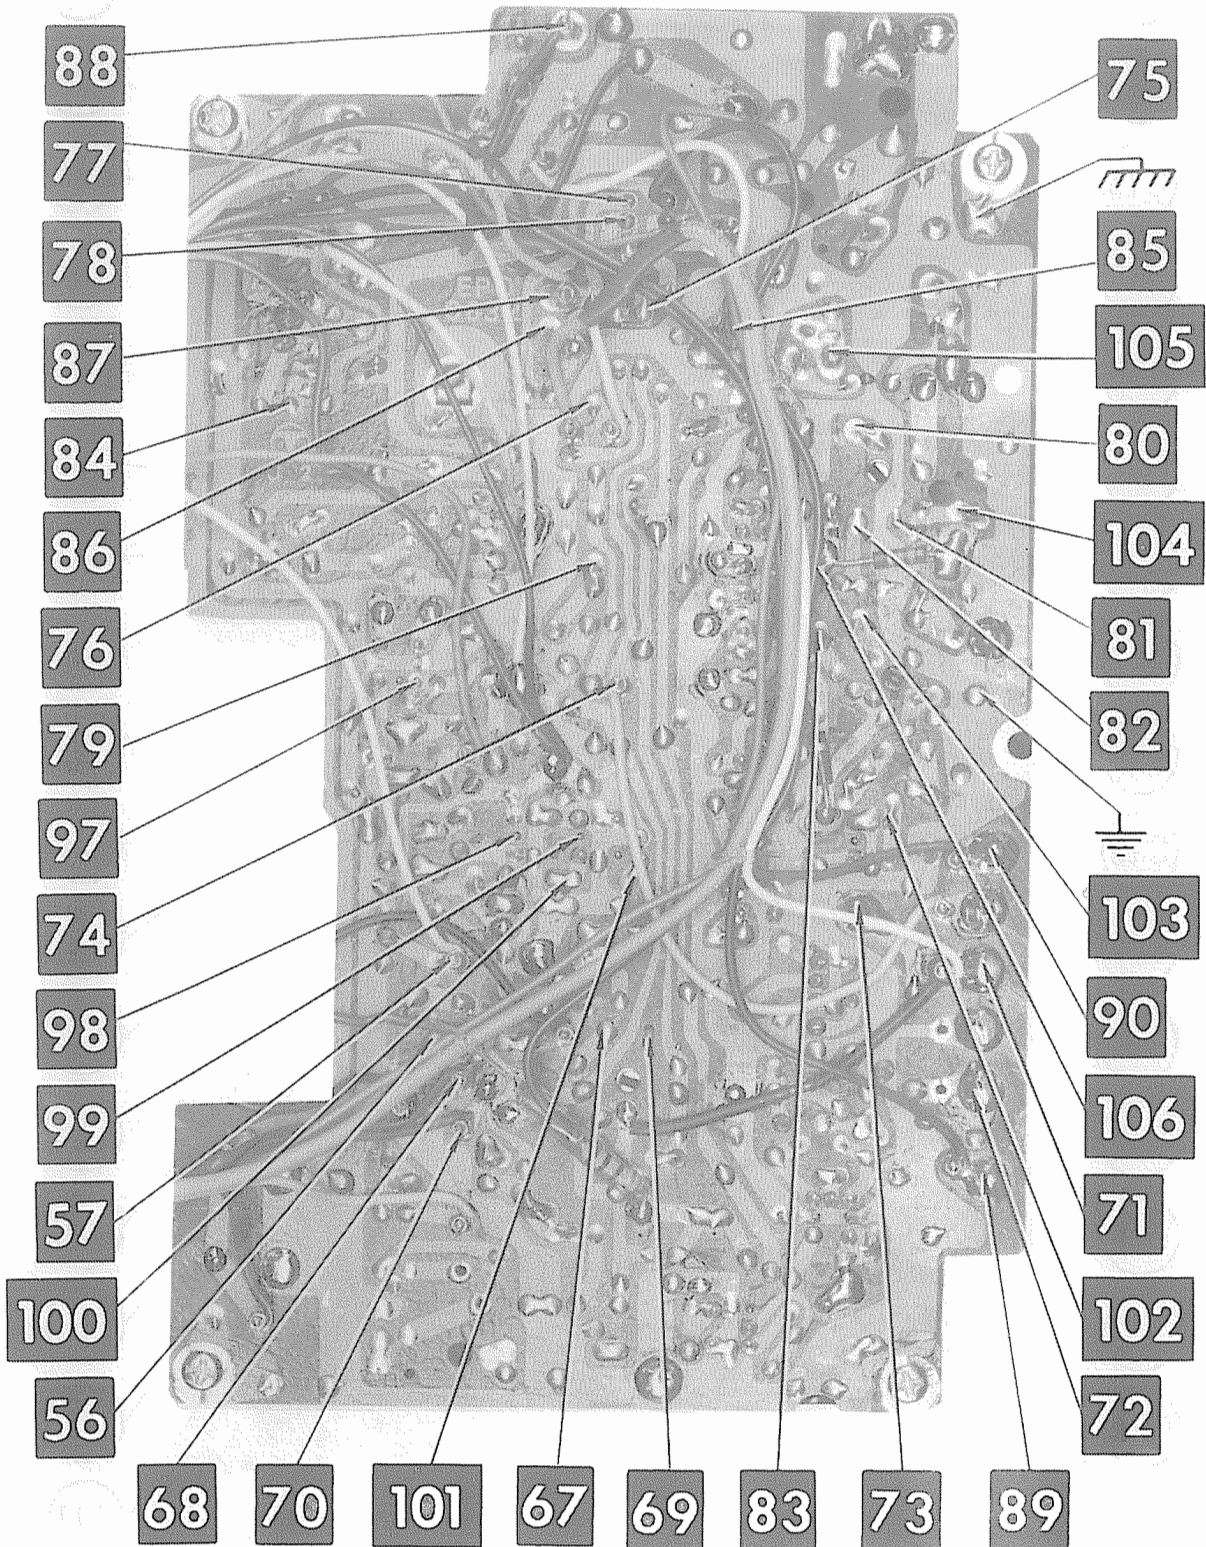


LAFAYETTE MODEL COM-PHONE 23


MAIN BOARD

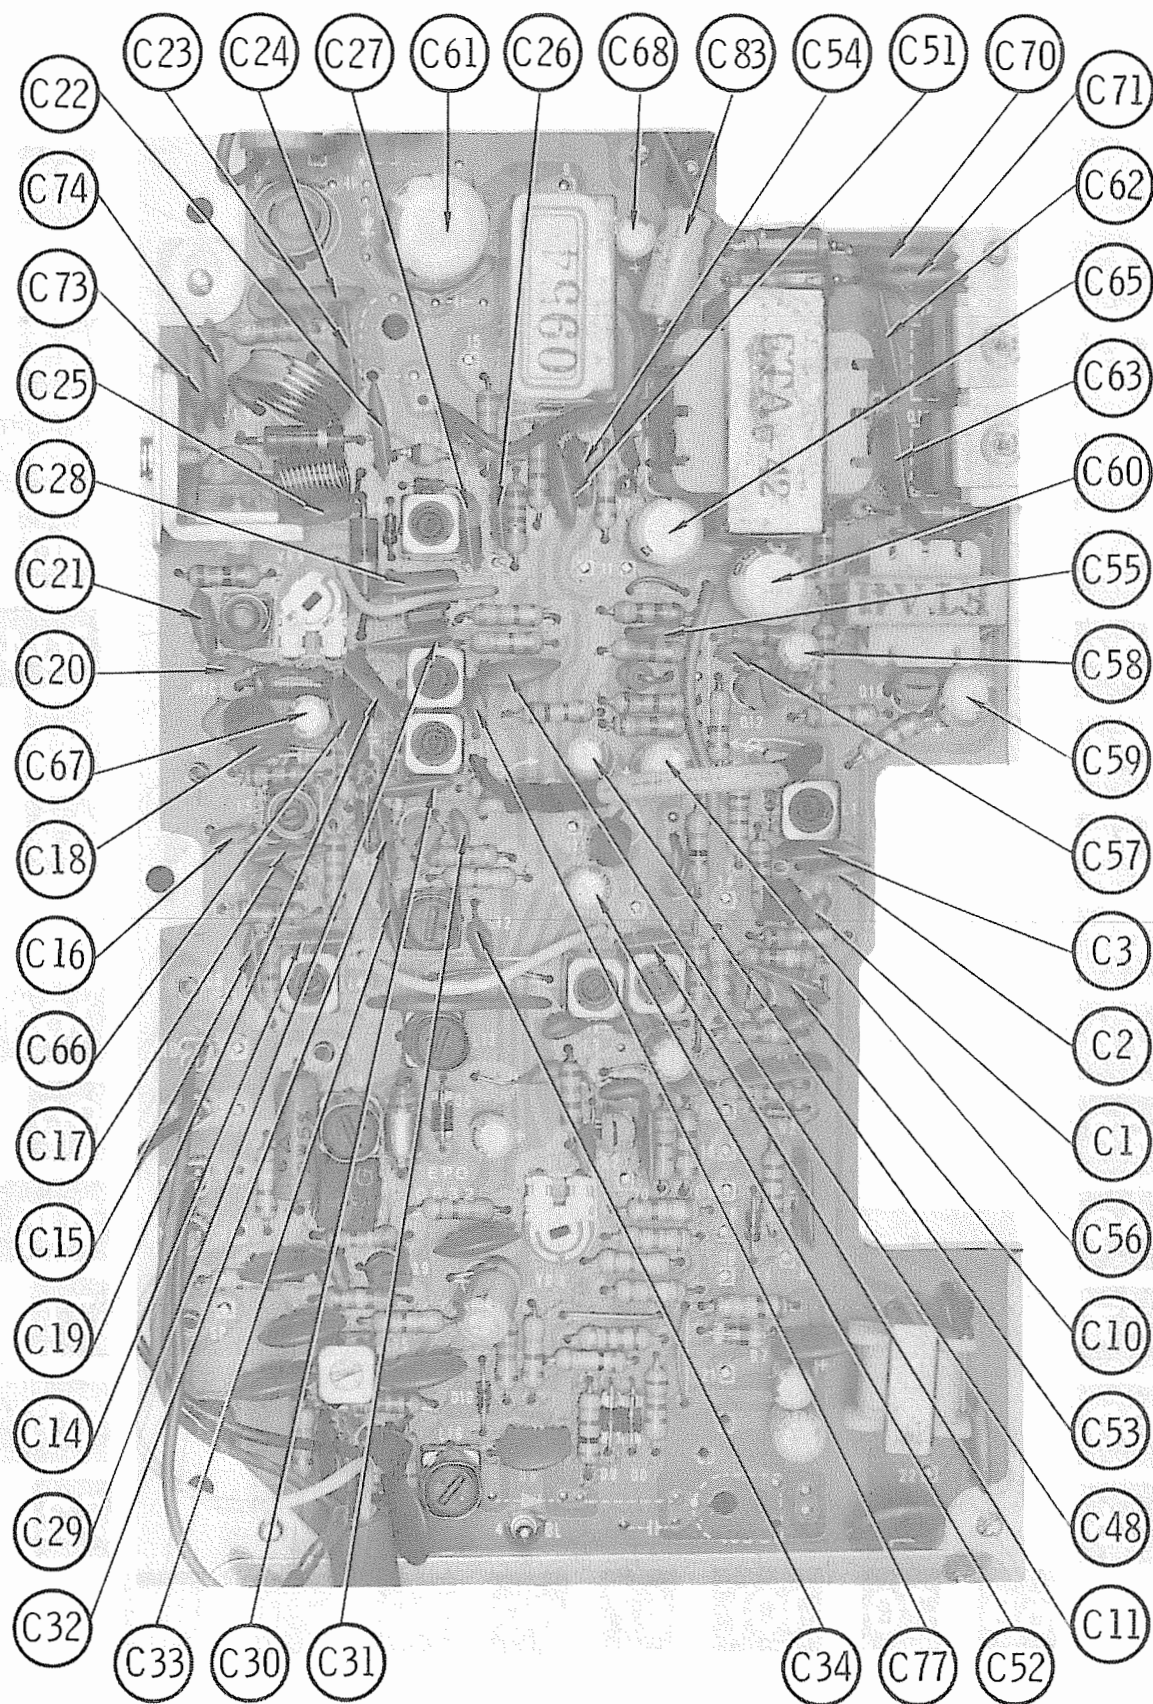


MAIN BOARD

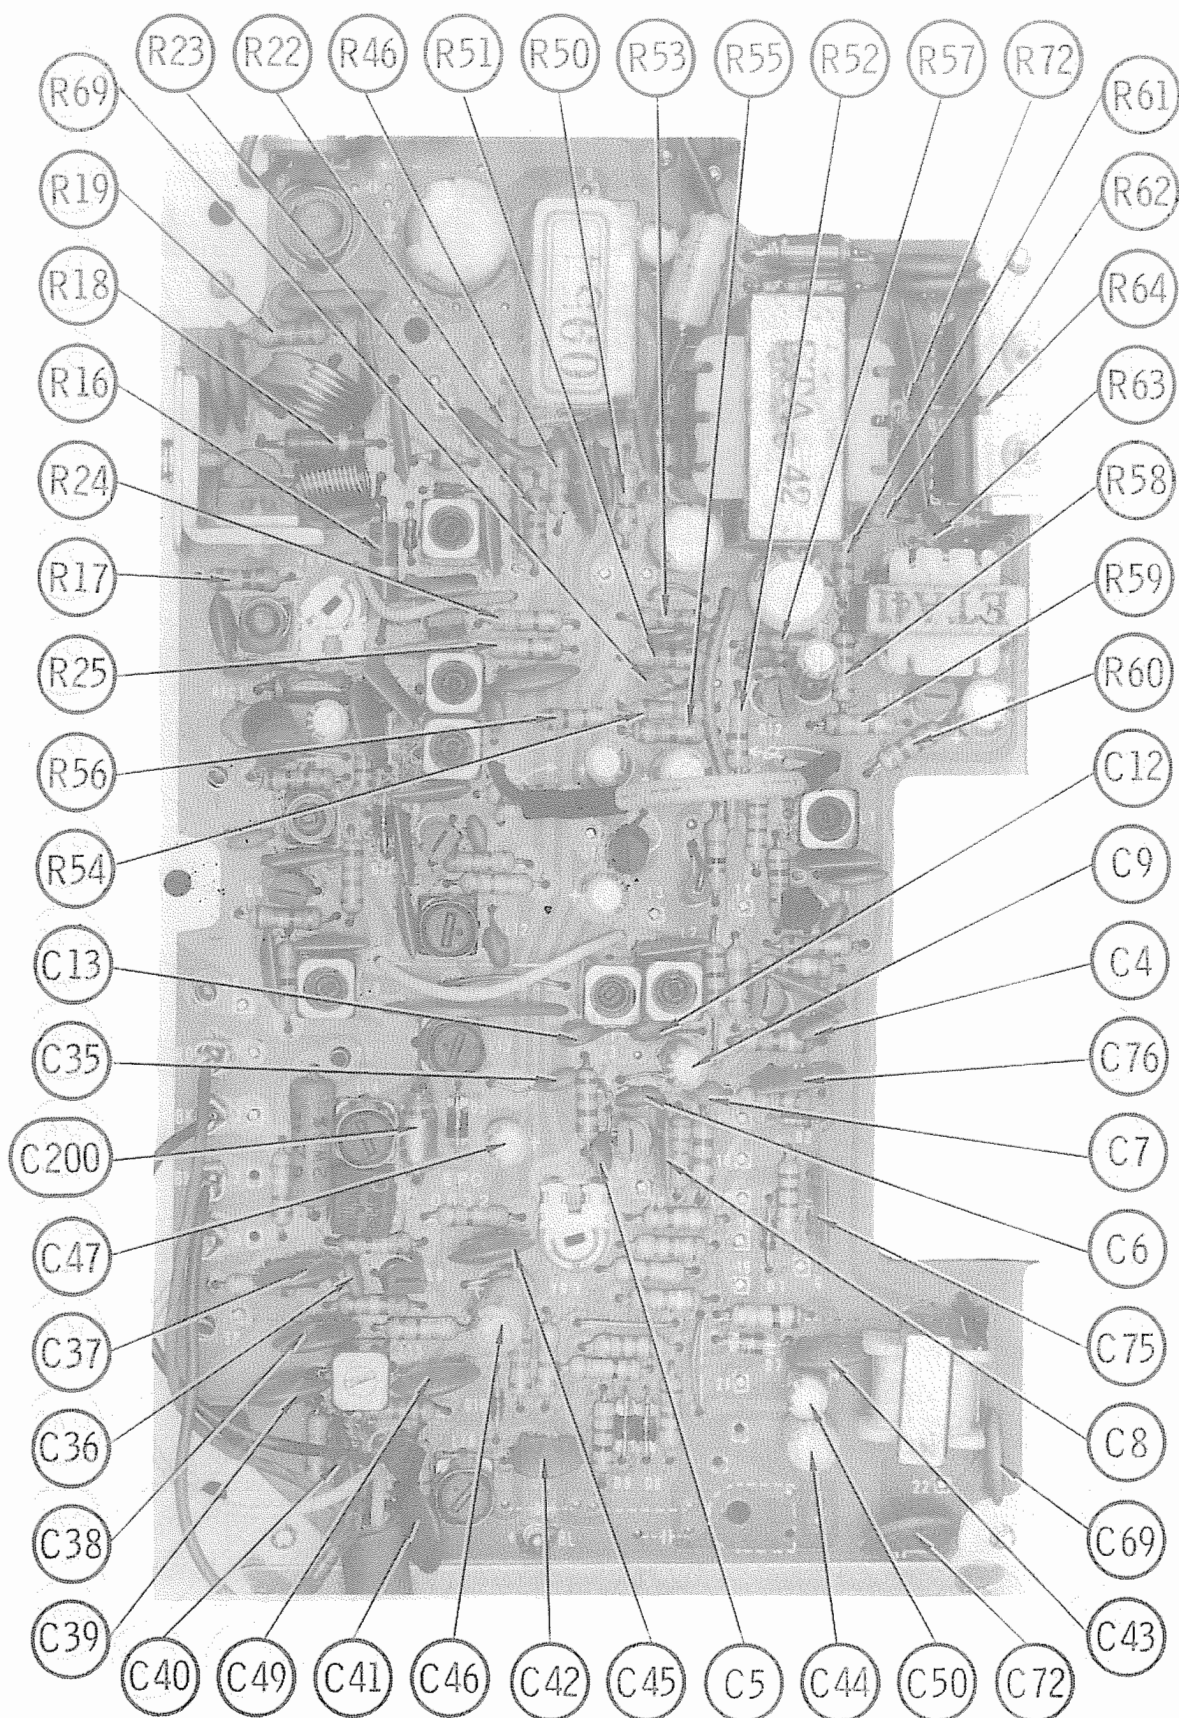


MAIN BOARD

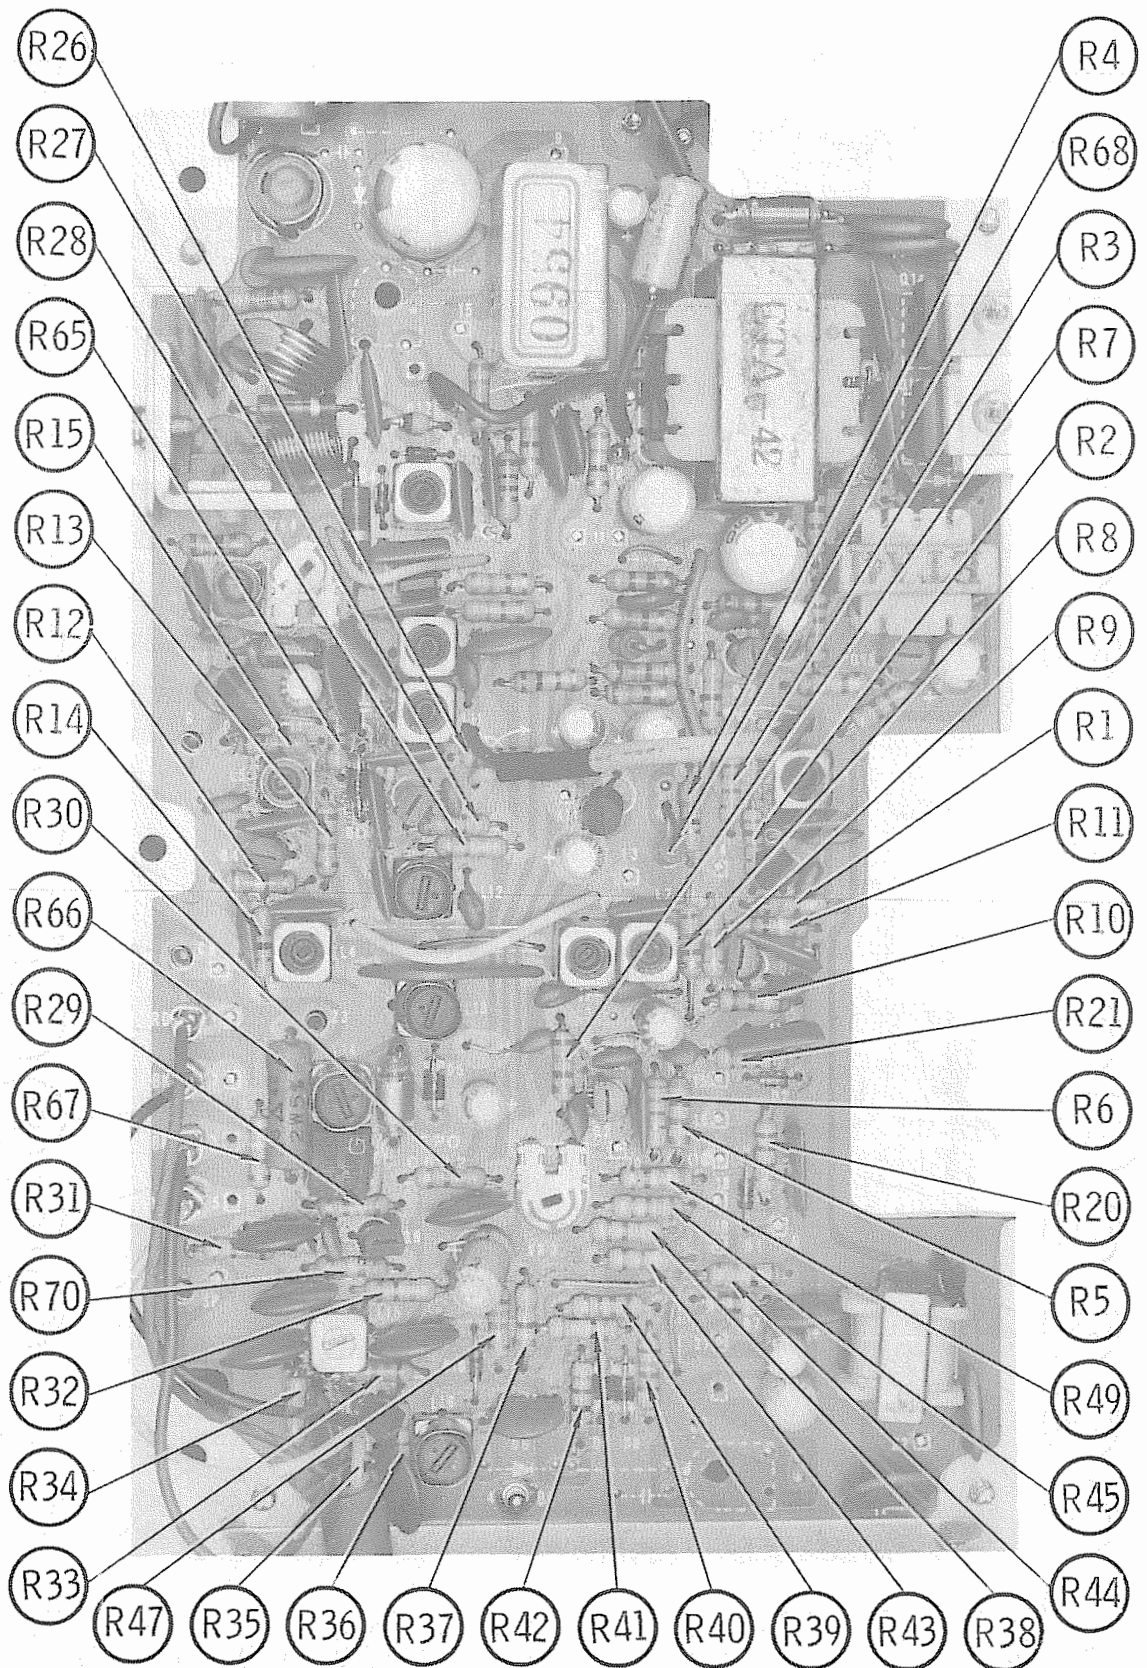


MAIN BOARD

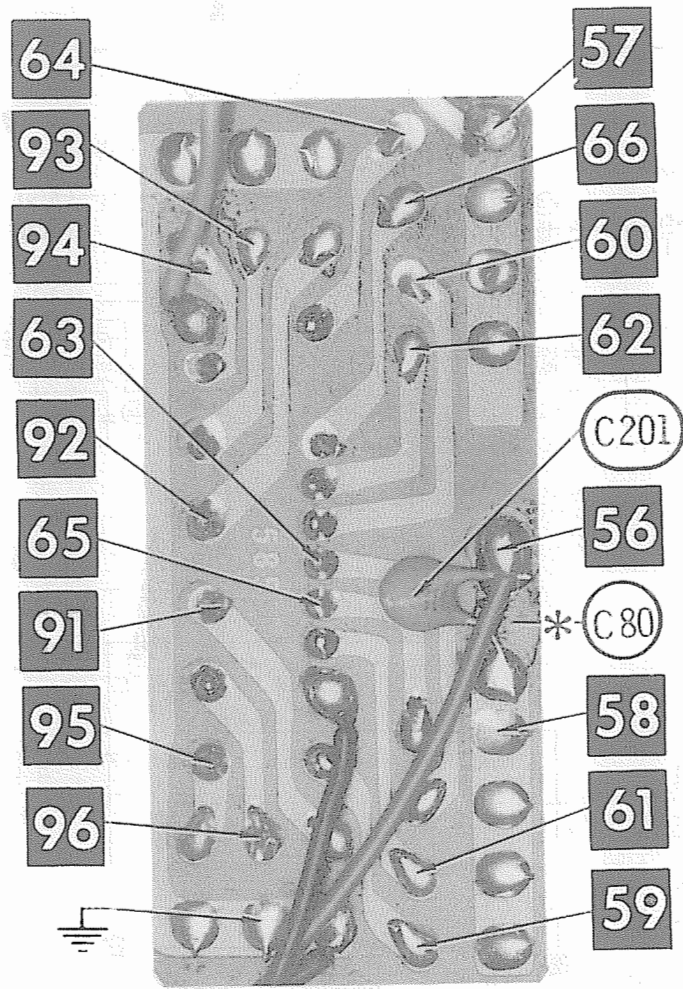

* Located on top of board



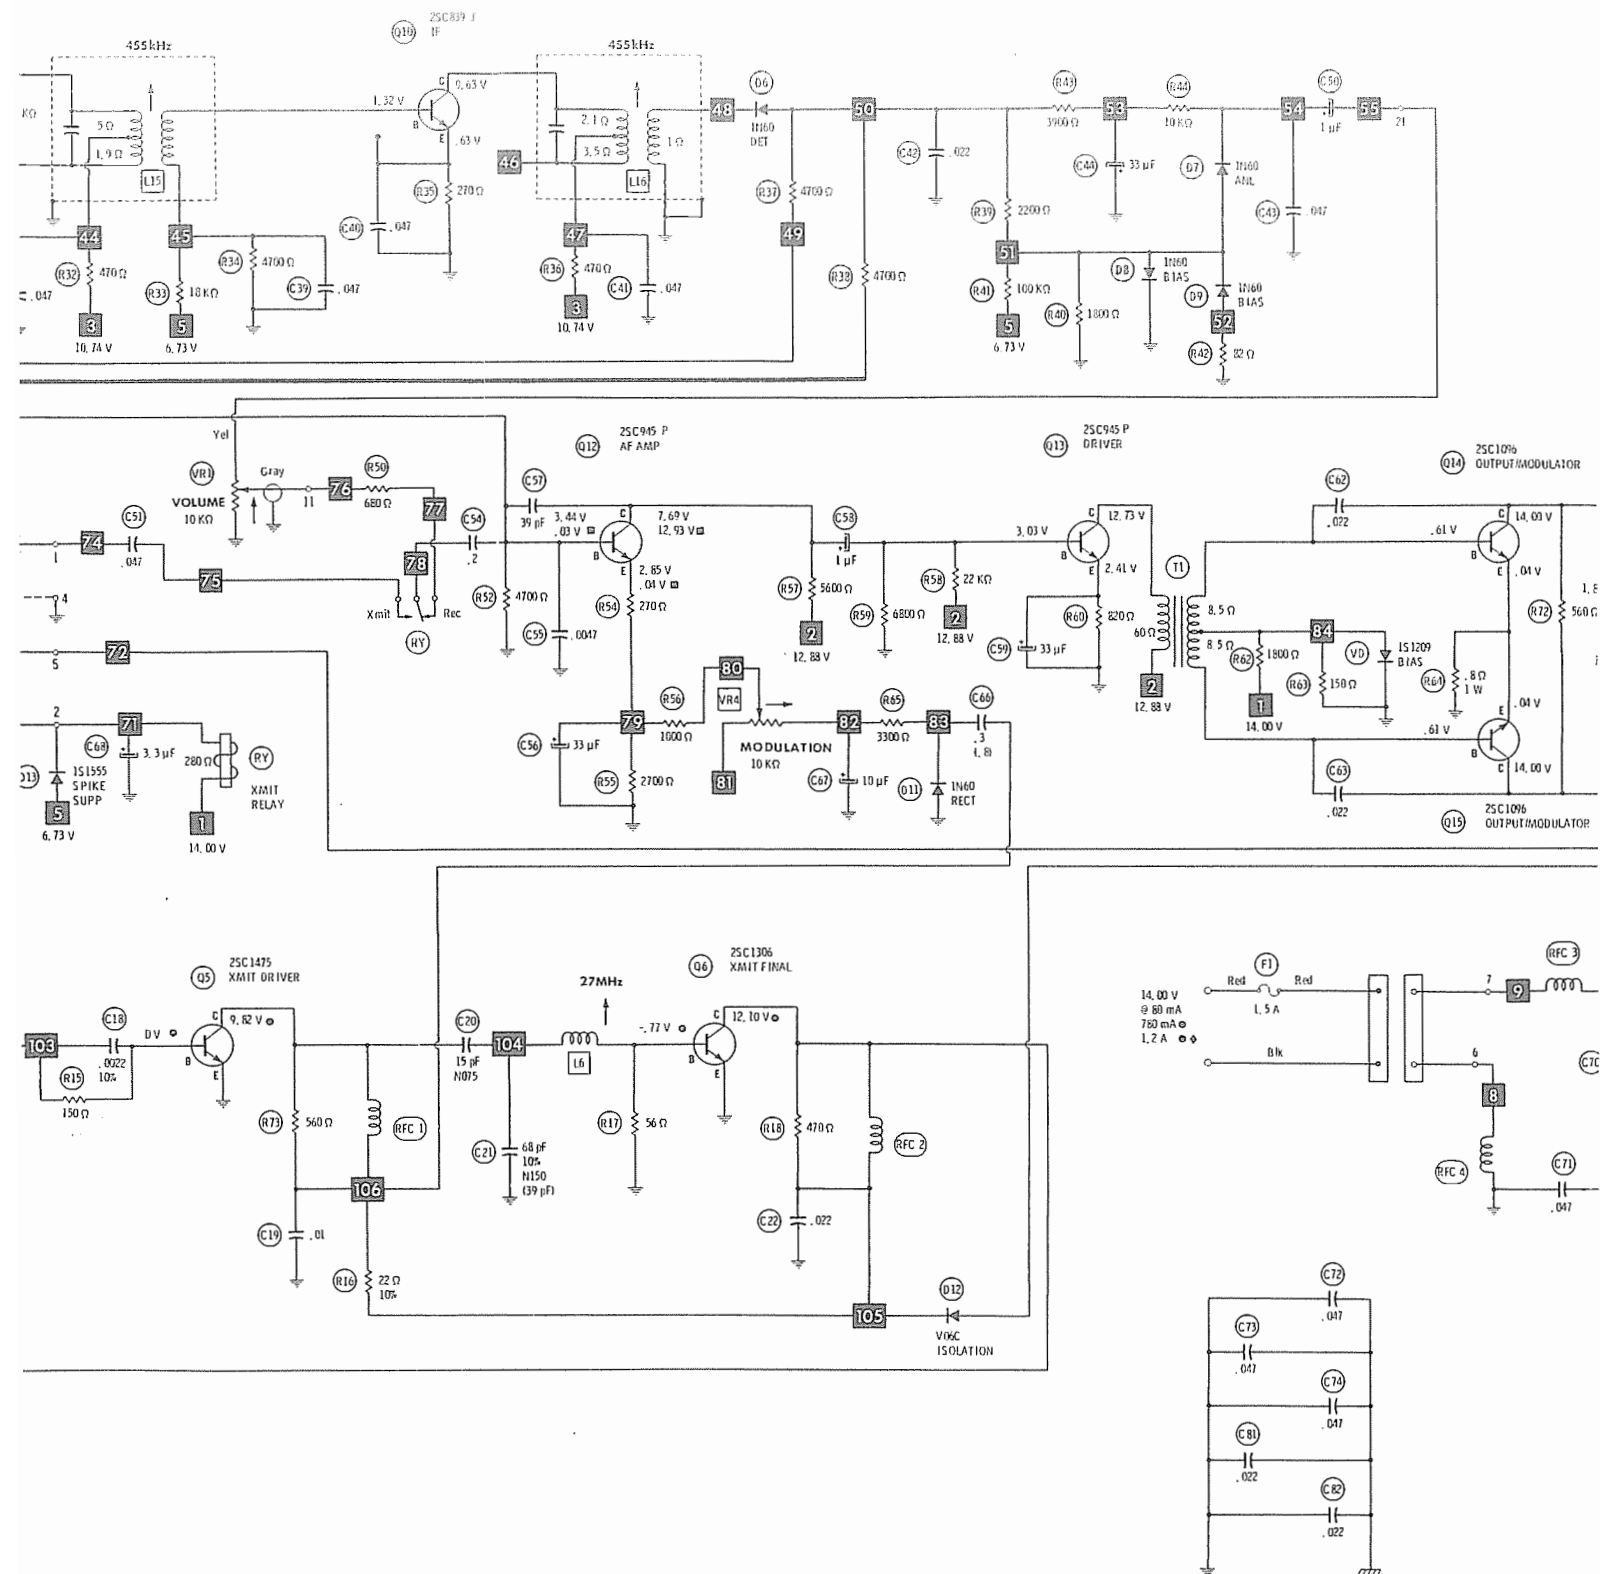


Supply voltage maintained as shown at input.
 Voltages measured with digital meter, no signal.
 Controls adjusted for normal operation.
 Arrow at control indicates direction of advance.
 Terminal identification may not be found on unit.
 Resistors are 1/2W or less, 5% unless noted.
 Value in () used in some versions.

- Circuitry not used in some versions
- - - Circuitry used in some versions
- ⊙ See parts list
- * Nominal value
- ⊥ Ground
- Chassis

Measurements with switching as shown unless noted:

- Squelch fully clockwise
- ◆ 100% modulation
- Transmit

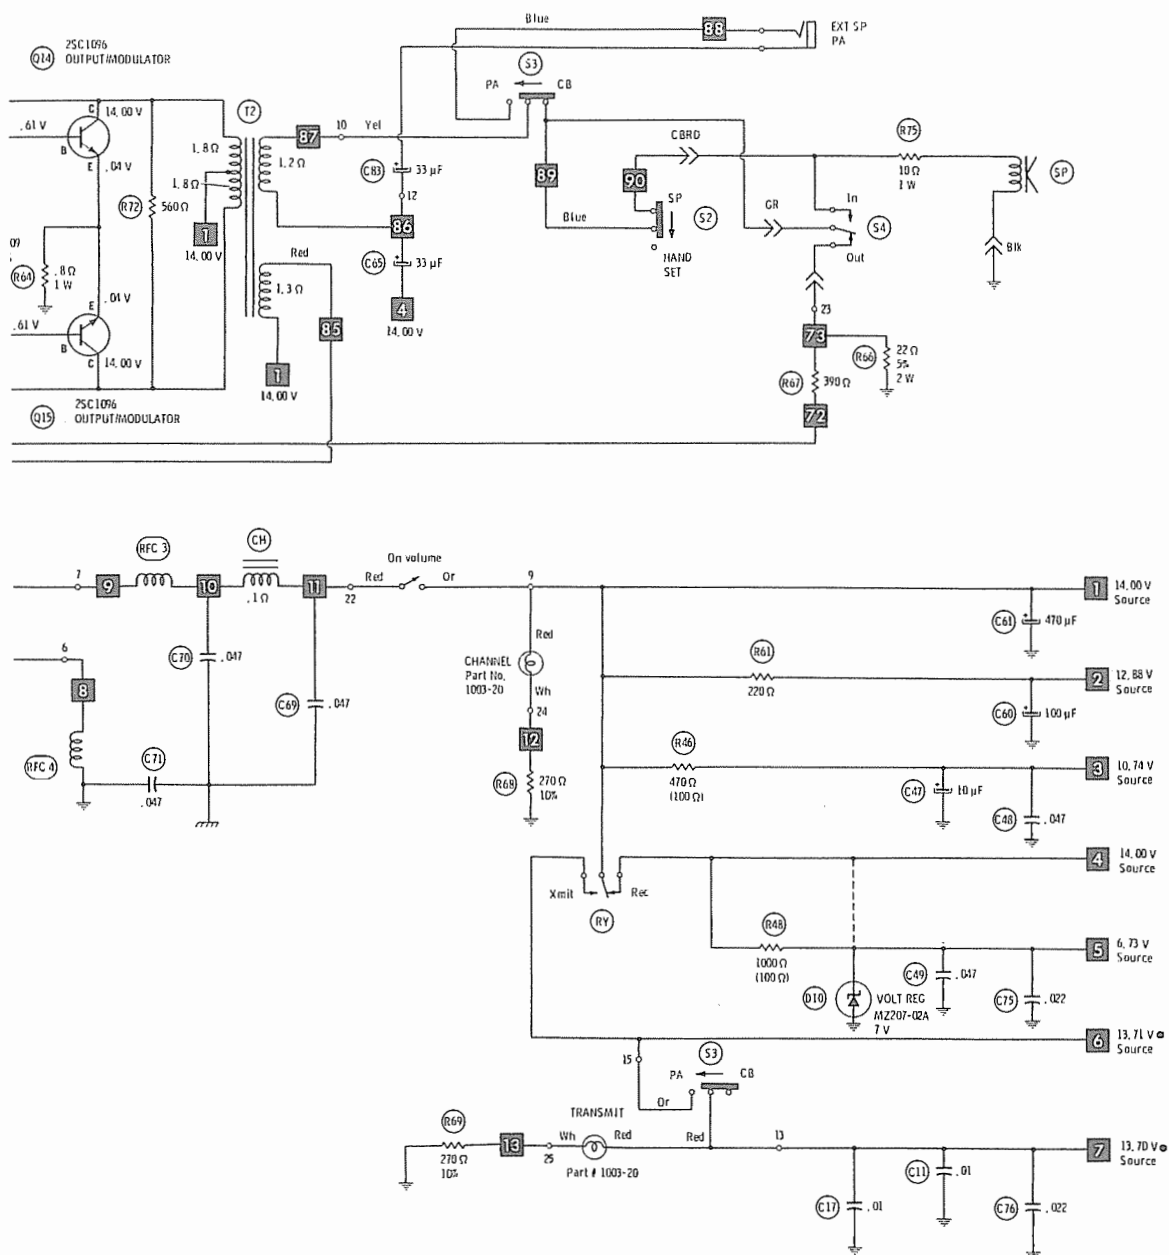

LAFAYETTE MODEL COM-PHONE 23

PARTS LIST AND DESCRIPTION

(When ordering parts, state Model, Part Number, and Description.)

PARTS LI

(When o

WIRING DATA

General-use Hook-up Wire	Use BELDEN No. 8530 (Solid) Available in 12 Colors 8524 (Stranded) Available in 12 Colors
Shielded Antenna Lead	Use BELDEN No. 8214 Lowest-loss (RG-8/U Type) 8237 Low-loss (RG-8/U) 8240 (Solid) Miniature (RG-58/U) 8259 (Stranded) Miniature (RG-58A/U)
Coiled Microphone Cable	Use BELDEN No. 8497 3-Conductor (1 shielded for Press-to-Talk) Neoprene 8491 4-Conductor (2 shielded, 2 unshielded) Neoprene
Ignition Noise Suppression	Use BELDEN No. 7300-Series Spark-Plug Sets
Bonding Strap	Use BELDEN No. 8661 (3/8 inch)

CAPACI

SEMICONDUCTORS (Select replacement transistor for best results)

ITEM No.	TYPE No.	MFR. PART No.	REPLACEMENT DATA							
			GENERAL ELECTRIC PART No.	INTERNATIONAL RECTIFIER PART No.	MALLORY PART No.	MOTOROLA PART No.	RAYTHEON PART No.	RCA PART No.	SPRAGUE PART No.	SYLVANIA PART No.
D1	1S1555	1937-17	GE-300	D200	PTC214	HEPR0602	RE 52	SK3100	RT-218	ECG177
D2	1S1555	1937-17	GE-300	D200	PTC214	HEPR0602	RE 52	SK3100	RT-218	ECG177
D3	1S1555	1937-17	GE-300	D200	PTC214	HEPR0602	RE 52	SK3100	RT-218	ECG177
D4	1S1555	1937-17	GE-300	D200	PTC214	HEPR0602	RE 52	SK3100	RT-218	ECG177
D5	1N60	1000-17	1N60	1N60	PTC206	HEPR9135	RE 47	SK3088	RT-263	ECG109
D6	1N60	1000-17	1N60	1N60	PTC206	HEPR9135	RE 47	SK3088	RT-263	ECG109
D7	1N60	1000-17	1N60	1N60	PTC206	HEPR9135	RE 47	SK3088	RT-263	ECG109
D8	1N60	1000-17	1N60	1N60	PTC206	HEPR9135	RE 47	SK3088	RT-263	ECG109
D9	1N60	1000-17	1N60	1N60	PTC206	HEPR9135	RE 47	SK3088	RT-263	ECG109
D10	MZ207-02A 7V Zener	2341-17	GEZD-6.8	Z1206	ZB6.8	HEPZ0409	RE 110	SK3058	RT-238	ECG5071
D11	1N60	1000-17	1N60	1N60	PTC206	HEPR9135	RE 47	SK3088	RT-263	ECG109
D12	V06C	1949-17	GE-504A	8D4	PTC201	HEPR0052	RE 49	SK3030	RT-213	ECG116
D13	1S1555	1937-17	GE-300	D200	PTC214	HEPR0602	RE 52	SK3100	RT-218	ECG177
Q1	2SC839J	1961-17	GE-20	TR-24	PTC121	HEPS0015	RE 13	SK3018	RT-107A	ECG123A
Q2	2SC839J	1961-17	GE-20	TR-24	PTC121	HEPS0015	RE 13	SK3018	RT-107A	ECG123A
Q3	2SC839H	2337-17	GE-20	TR-24	PTC121	HEPS0015	RE 13	SK3018	RT-107A	ECG123A
Q4	2SC839H	2337-17	GE-20	TR-24	PTC121	HEPS0015	RE 13	SK3018	RT-107A	ECG123A
Q5	2SC1475	2340-17	GE-45	TR-64	PTC143	HEPS5014	RE 79	SK3048		ECG195
Q6	2SC1306	2399-17(1)	GE-66	TR-55	PTC110				RT-197	ECG235
Q7	2SC460A	1373-17	GE-17	TR-24	PTC101	HEPS0020	RE 10	SK3039	RT-187	ECG108
Q8	2SC839H	2337-17	GE-20	TR-24	PTC121	HEPS0015	RE 13	SK3018	RT-107A	ECG123A
Q9	2SC839J	1961-17	GE-20	TR-24	PTC121	HEPS0015	RE 13	SK3018	RT-107A	ECG123A
Q10	2SC839J	1961-17	GE-20	TR-24	PTC121	HEPS0015	RE 13	SK3018	RT-107A	ECG123A
Q11	2SC9450	2121-17	GE-20	TR-21	PTC139	HEPS0015	RE 13	SK3124	RT-107A	ECG123A
Q12	2SC945P	2338-17	GE-20	TR-21	PTC136	HEPS0015	RE 13	SK3124	RT-107A	ECG123A
Q13	2SC945P	2338-17	GE-20	TR-21	PTC136	HEPS0015	RE 13	SK3124	RT-107A	ECG123A
Q14	2SC1096	2202-17(2)	GE-28	TR-55	PTC110	HEPS5000	RE 42	SK3054	RT-197	ECG186
Q15	2SC1096	2202-17(2)	GE-28	TR-55	PTC110	HEPS5000	RE 42	SK3054	RT-197	ECG186
VD	1S1209	2400-17	GE-504A	8D4	PTC201	HEPR0052	RE 49	SK3030	RT-213	ECG116

(1) Rating 12 watts @ 3 amp.

(2) Rating 10 watts @ 2 amp.

ELECTROLYTIC CAPACITORS

ITEM No.	RATING	REPLACEMENT DATA					
		MFR. PART No.	ARCO PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C9	10 16V	1043-52	RME-B-G-010	EP15-10	PC10-25	VTT10A25	EV-1222
C44	33 10V	1057-52	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125
C46	33 10V	1057-52	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125
C47	10 16V	1043-52	RME-B-G-010	EP15-10	PC10-25	VTT10A25	EV-1222
C50	1 50V	1015-52	RME-A-J-001	EP50-1	PC1-50	MTV1CB50	EV-1615
C52	10 16V	1043-52	RME-B-G-010	EP15-10	PC10-25	VTT10A25	EV-1222
C53	10 16V	1043-52	RME-B-G-010	EP15-10	PC10-25	VTT10A25	EV-1222
C56	33 10V	1057-52	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125
C58	1 50V	1015-52	RME-A-J-001	EP50-1	PC1-50	MTV1CB50	EV-1615
C59	33 10V	1057-52	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125
C60	100 16V	1080-52	RME-E-E-100	EP15-100	PC100-16	VTT100F16	EV-1230
C61	470 16V	1105-52	RME-L-E-500	EP15-500	PC500-16	VTT470J16	EV-1250
C65	33 10V	1057-52	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125
C67	10 16V	1043-52	RME-B-G-010	EP15-10	PC10-25	VTT10A25	EV-1222
C68	3.3 25V	1026-52	RME-A-H-003	EP30-5	PC5-50	VTT3R3A50	EV-1318
C83	33 10V	1057-52	ME-3-D-035	EP15-25	PC30-25	VTT33A10	EV-1125

ITEM No.	
C1	3
C2	150
C3	.01
C4	27 1
C5	.001
C6	68 1
C7	39
C8	.01
C10	.01
C11	.01
C12	2
C13	2
C14	.01
C15	.01
C16	82 1
C17	.01
C18	.002
C19	.01
C20	15 1
C21	68 1
C22	.022
C23	.022
C24	390
C25	39 1
C26	.01
C27	.01
C28	.01
C29	.01
C30	.01
C32	.01
C33	.01
C34	2
C35	47
C36	3
C37	.047
C38	.047
C39	.047
C40	.047
C41	.047
C42	.022
C43	.047
C45	.047
C48	.047
C49	.047
C51	.047
C54	.2
C55	.004
C57	39
C62	.022
C63	.022
C66	.3
C69	.047
C70	.047
C71	.047
C72	.047
C73	.047
C74	.047
C75	.022
C76	.022
C77	3
C78	22
C79	220
C80	82 1
C81	.022
C82	.022
C200	510
C201	33

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

CAPACITORS

ITEM No.	RATING	MFR. PART No.	REPLACEMENT DATA				
			ARCO PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	MALLORY PART No.	SPRAGUE PART No.
C1	3		CCTO-3R3	DTZ-3R3	NP03P3	CN0533	10TCC-V33
C2	150 10%		CCD-151	DD-151		CN0315	10TCC-T15
C3	.01		CCD-103	DC-103	GP1000D	MAG5011	2SS-S10
C4	27 10%		CCTO-270			CN0427	10TCC-Q27
C5	.001		CCD-102	DD-102		GP210	10TS-D10
C6	68 10%		CCD-680	DD-680	GP68	GP468	10TS-Q68
C7	39		CCTO-390			CN0439	10TCC-Q39
C8	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C10	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C11	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C12	2		CCTO-2R2	DTZ-2R2	NP02P2	CN0522	10TCC-V22
C13	2		CCTO-2R2	DTZ-2R2	NP02P2	CN0522	10TCC-V22
C14	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C15	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C16	82 10%		CCD-820	DD-820		GP482	10TS-Q82
C17	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C18	.0022 10%		CCD-222			GP222	10TS-Q22
C19	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C20	15 N075	1017-51					
C21	68 10% N150	1044-51					
C22	.022		CCD-203			GP120	5GA-S20
C23	.022		CCD-203			GP120	5GA-S20
C24	390 10%		CCD-391	DD-391	GP390	GP339	10TS-T39
C25	39 10% N075	1031-51					
C26	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C27	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C28	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C29	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C30	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C32	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C33	.01		CCD-103	DC-103	GP10000	MAG5011	2SS-S10
C34	2		CCTO-2R2	DTZ-2R2	NP02P2	CN0522	10TCC-V22
C35	47		CCTO-470	DTZ-47	NP047	CN0447	10TCC-Q47
C36	3		CCTO-3R3	DTZ-3R3	NP03P3	CN0533	10TCC-V33
C37	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C38	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C39	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C40	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C41	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C42	.022		CCD-203			GP120	5GA-S20
C43	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C45	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C48	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C49	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C51	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C54	.2		CCTO-2R2	DTZ-2R2	NP02P2	CN0522	10TCC-V22
C55	.0047		CCD-472				10TS-D47
C57	39		CCTO-390			CN0439	10TCC-Q39
C62	.022		CCD-203			GP120	5GA-S20
C63	.022		CCD-203			GP120	5GA-S20
C66	.3						
C69	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C70	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C71	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C72	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C73	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C74	.047		CCD-503	DC-503	MGP05	MAG5015	TGL-S50
C75	.022		CCD-203			GP120	5GA-S20
C76	.022		CCD-203			GP120	5GA-S20
C77	3		CCTO-3R3	DTZ-3R3	NP03P3	CN0533	10TCC-V33
C78	22		CCTO-220	DTZ-22	NP022	CN0422	10TCC-Q22
C79	220		CCD-221	DD-221		GP322	10TS-T22
C80	82 10%		CCD-820	DD-820		GP482	10TS-Q82
C81	.022		CCD-203			GP120	5GA-S20
C82	.022		CCD-203			GP120	5GA-S20
C200	510 5%		DM15-511J	CPR-510J	CD15FD511J03	SX351	424ME5100J501
C201	33		CCTO-330	DTZ-33	NP033	CN0433	10TCC-Q33

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

CONTROLS (All wattages 1/2 watt, or less, unless listed)

ITEM No.	FUNCTION	RESISTANCE	REPLACEMENT DATA				
			MFGR. PART No.	CENTRALAB PART No.	CLAROSTAT PART No.	MALLORY PART No.	TRW PART No.
VR1	Volume/Switch	10K	1747-11				
VR2	Squelch	10K	1749-11				
VR3	Squelch Range	10K	2716-13	TSV-10K (3) or T-10K (3)	C-103 (3)	MTC14L1 (3)	X201R103B (3)
VR4	Modulation	10K	2716-13	TSV-10K (3) or T-10K (3)	C-103 (3)	MTC14L1 (3)	X201R103B (3)

(3) For horizontal mounting, bend the two outside terminals to fit PC board. Use jumper to connect center terminal to PC Board.

COILS (RF-IF)

ITEM No.	FUNCTION	REPLACEMENT DATA			REMARKS
		PART No.	OTHER IDENTIFICATION	MILLER PART No.	
L1	Receive Mixer (37MHz)	2723-23	ETR196		
L2	Xmit Mixer (27MHz)	2354-23	R-30483E		
L3	Xmit Mixer (27MHz)	2354-23	R-30483E		
L4	Xmit Mixer (27MHz)	2353-23			
L5	RF Amp (27MHz)	2765-23			
L6	Xmit Final (27MHz)	2720-23			
L7	RF Choke	2239-23			
L8	Ant. Loading (27MHz)	2725-23			
L9	Rec. RF (27MHz)	2721-23	ETR1944815		
L10	Rec. RF	2431-23			
L11	Mixer Input (27MHz)	2431-23	ETR104		
L12	Rec. Mixer (10.6MHz)	2732-23	R279		
L13	Mixer Output (10.6MHz)	2732-23	R279		
L14	Input IF (455kHz)	2197-24			
L15	Interstage IF (455kHz)	1943-24	ET171		
L16	Output IF (455kHz)	2205-24	ET1106		
L17	54MHz Trap	2216-23	ET1714835		
RFC1	RF Choke	2342-23			
RFC2	RF Choke	2217-23			
RFC3	Line Choke	2217-23			
RFC4	Line Choke	2217-23			

FILTER CHOKE

ITEM No.	RATINGS			REPLACEMENT DATA			NOTES
	CURRENT (Measured)	DC RES.	INDUCTANCE (0 CURRENT 1000~)	MFGR. PART No.	THORDARSON PART No.	TRIAD PART No.	
CH	1200mA	.1	.21mH	1090-15 ELA-2 (1)			(1) Number on unit.

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

TRANSFORMER (Driver)

ITEM No.	TURNS RATIO			REPLACEMENT DATA			NOTES
	PRI.	SEC. 1	SEC. 2	MFGR. PART No.	THORDARSON PART No.	TRIAD PART No.	
T1	2	1		1805-15 ETA-41 (1)			(1) Number on unit.

TRANSFORMER (Audio Output)

ITEM No.	IMPEDANCE		REPLACEMENT DATA			NOTES
	PRI.	SEC.	MFGR. PART No.	THORDARSON PART No.	TRIAD PART No.	
T2	36	16	1806-15 ETA-42 (1)			(1) Number on unit.

LAFAYETTE MODEL COM-PHONE 23

SPEAKER

ITEM No.	TYPE	REPLACEMENT DATA		NOTES
		MFGR. PART No.	QUAM PART No.	
SP	2 3/4" PM, 8 Ohms	1303-36	27A05Z12	

FUSE DEVICES

ITEM No.	DESCRIPTION	REPLACEMENT DATA							
		PART No.		BUSS PART No.		LITTELFUSE PART No.		WORKMAN PART No.	
		DEVICE	HOLDER	DEVICE	HOLDER	DEVICE	HOLDER	DEVICE	
F1	1.5 Amp, Fast Acting			AGC1 1/2	H0J	31201.5	150145	FG1 1/2-2	

PARTS LIST AND DESCRIPTION (CONTINUED)

(When ordering parts, state Model, Part Number, and Description.)

CRYSTALS

ITEM No.	CRYSTAL FREQUENCY IN MHz	MFR. PART No.	CTS KNIGHTS PART No.	CHANNEL	ITEM No.	CRYSTAL FREQUENCY IN MHz	MFR. PART No.	CTS KNIGHTS PART No.	CHANNEL
X1	37.600	1362-35	DA14W37.600	1,2,3,4	X8	10.625	1369-35	DB26W10.625	2,6,10,14,18,22
X2	37.650	1363-35	DA14W37.650	5,6,7,8	X9	10.615	1370-35	DB26W10.615	3,7,11,15,19
X3	37.700	1364-35	DA14W37.700	9,10,11,12	X10	10.595	1371-35	DB26W10.595	4,8,12,16,20,23
X4	37.750	1365-35	DA14W37.750	13,14,15,16	X11	10.180	1372-35	DC26W10.180	1,5,9,13,17,21
X5	37.800	1366-35	DA14W37.800	17,18,19,20	X12	10.170	1373-35	DC26W10.170	2,6,10,14,18,22
X6	37.850	1367-35	DA14W37.850	21,22,23	X13	10.160	1374-35	DC26W10.160	3,7,11,15,19
X7	10.635	1368-35	DB26W10.635	1,5,9,13,17,21	X14	10.150	1375-35	DC26W10.150	4,8,12,16,20,23

MISCELLANEOUS

ITEM No.	PART NAME	PART No.	NOTES
CF	Ceramic Filter	1361-35	Rec. IF (455kHz)
R1	Relay	1084-37	280 Ohms
S1	Switch	2093-14	Channel Selector
S2	Switch	2092-14	Hand Set
S3	Switch	2090-14	PA/CB
S4	Switch	2091-14	Power (On-Off)
	Hand Set	1344-31	W/Cartridge, Cable
	Mike Cartridge, Handset	1081-75	
	Speaker Cartridge, Handset	1304-36	
	Printed Circuit Board	1784-16	Main
	Printed Circuit Board	1785-16	Crystal

CABINETS & CABINET PARTS (When ordering specify model, chassis & color)

ITEM	PART No.	ITEM	PART No.
Chassis	5342-20	Wall Hanger Bracket	5359-20
Case Top	5339-20	Channel Dial	5343-20
Case Bottom	5340-20	Knob, Channel Selector	2006-18
Hand Set Holder	5341-20	Knob, Volume, Squelch	2007-18
Mobile Mtg. Bracket	5358-20		

ACCESSORIES

ITEM	MFR. PART No.	REMARKS
DC Power Cord	1311-38	