11439

SOUNDINGS IN FEET

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES – GULF COAST

FLORIDA

SAND KEY TO REBECCA SHOAL

Formerly CS(S) 1252; 1st Ed., July 1912 © 1951-???? KAPP 356

HORIZONTAL DATUM

The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83), which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 1.53" northward and 0.641" eastward to agree with this chart.

Mercator Projection
Scale 1:80,000 at Lat. 24°35'

North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FEET
AT MEAN LOWER LOW WATER

HEIGHTS
Heights in feet above Mean High Water.

NOTE X

Within the 12-nautical mile Territorial Sea, established by Presidential Proclamation, some Federal laws apply. The Three Nautical Mile Line, previously identified U.S. Territorial Sea, is retained as it continues to depict the jurisdictional limit of the other laws. The 9-nautical mile Natural Resource Boundary off the Gulf coast of Florida, Texas, and Puerto Rico, and the Three Nautical Mile Line elsewhere remain in most cases the inner limit of Federal fisheries jurisdiction and the outer limit of the jurisdiction of the states. The 24-nautical mile Contiguous Zone and the 200-nautical mile Exclusive Economic Zone were established by Presidential Proclamation. Unless fixed by treaty or the U.S. Supreme Court, these maritime limits are subject to modification.

NOTE Z
NO-DISCHARGE ZONE, 40 CFR 140

All Florida State waters within the Florida Keys National Marine Sanctuary are designated as a No-Discharge Zone (NDZ). Under the Clean Water Act, Section 312, all discharges from vessels into the No-Discharge Zone (NDZ) are completely prohibited from discharging any sewage, treated or untreated, into the waters. Vessels must have installed marine sanitation device (MSD) that are navigating, moored, anchored, or docked within a NDZ must have the MSD disabled to prevent the overboard discharge of sewage (treated or untreated) or install a holding tank. Regulations for the NDZ are contained in the U.S. Coast Pilot. Additional information concerning the regulations and requirements may be obtained from the Environmental Protection Agency (EPA) web site: http://www.epa.gov/owow/oceans/regulatory/vessel_sewage/.

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 5. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at: the Office of the Commander, 7th Coast Guard District in Miami, Florida, or at the Office of the District Engineer, Corps of Engineers in Jacksonville, Florida.

Refer to charted regulation section numbers.

WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

TIDAL INFORMATION

PLACE		Height referred to datum of soundings (MLLW)		
NAME	(LAT/LONG)	Mean Higher High Water feet	Mean High Water feet	Mean Low Water feet
Sand Key Lighthouse	(24° 27' N/81° 53' W)	1.7	1.4	0.2

Dashes (– –) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tide current predictions are available on the Internet from http://tidesandcurrents.noaa.gov. (Mar 2012)

COLREGS, 80.740 (see note A)

International Regulations for Preventing Collisions at Sea, 1972. The entire area of this chart falls seaward of the COLREGS Demarcation line.

PARTICULARLY SENSITIVE SEA AREA

The Particularly Sensitive Sea Area (PSSA) is indicated by a dashed green limiting line highlighted with a green screened band or by a green screened band. Vessels navigating within this line cannot be forced to alter course in order to avoid damage to a PSSA or an environmentally sensitive area around which mariners should exercise extreme caution. See U.S. Coast Pilot volumes for information regarding this area.

For Symbols and Abbreviations see Chart No. 1

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio station listed below provides continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Key West, FL	WXJ-95	162.40 MHz	

NOAA encourages users to submit inquiries, discrepancies or comments about this chart at http://www.nauticalcharts.noaa.gov/staff/contact.htm.

NOTE C
PROHIBITED AREAS

(Areas to be avoided)

Under the Florida Keys National Marine Sanctuary and Protection Act, Pub. L. 101-605 and MO advisory SN/Circ. 145, these areas are to be avoided by tank vessels and vessels greater than 50 meters in length.

CORAL PROPAGATION

Uncharted submerged manmade structures, designed for the purpose of coral propagation, may exist within the limits of this chart, principally in shallow water areas.

SCALE 1:80,000

Nautical Miles: 1 0 1 2 3 4 5 6 7

Yards: 1000 0 2000 4000 6000 8000 10000

Meters: 1000 0 2000 4000 6000 8000 10000

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey with additional data from the U.S. Coast Guard.

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 5 for important supplemental information.

Additional information can be obtained at nauticalcharts.noaa.gov.

CAUTION
SUBMARINE PIPELINES AND CABLES

Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:

Pipeline Area — Cable Area

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging or trawling.

Covered wells may be marked by lighted or unlighted buoys.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

NOTE B

Area is open to unrestricted surface navigation but all vessels are cautioned neither to anchor, dredge, trawl, lay cables, bottom nor conduct any other similar type of operation because of residual danger from mines on the bottom.

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

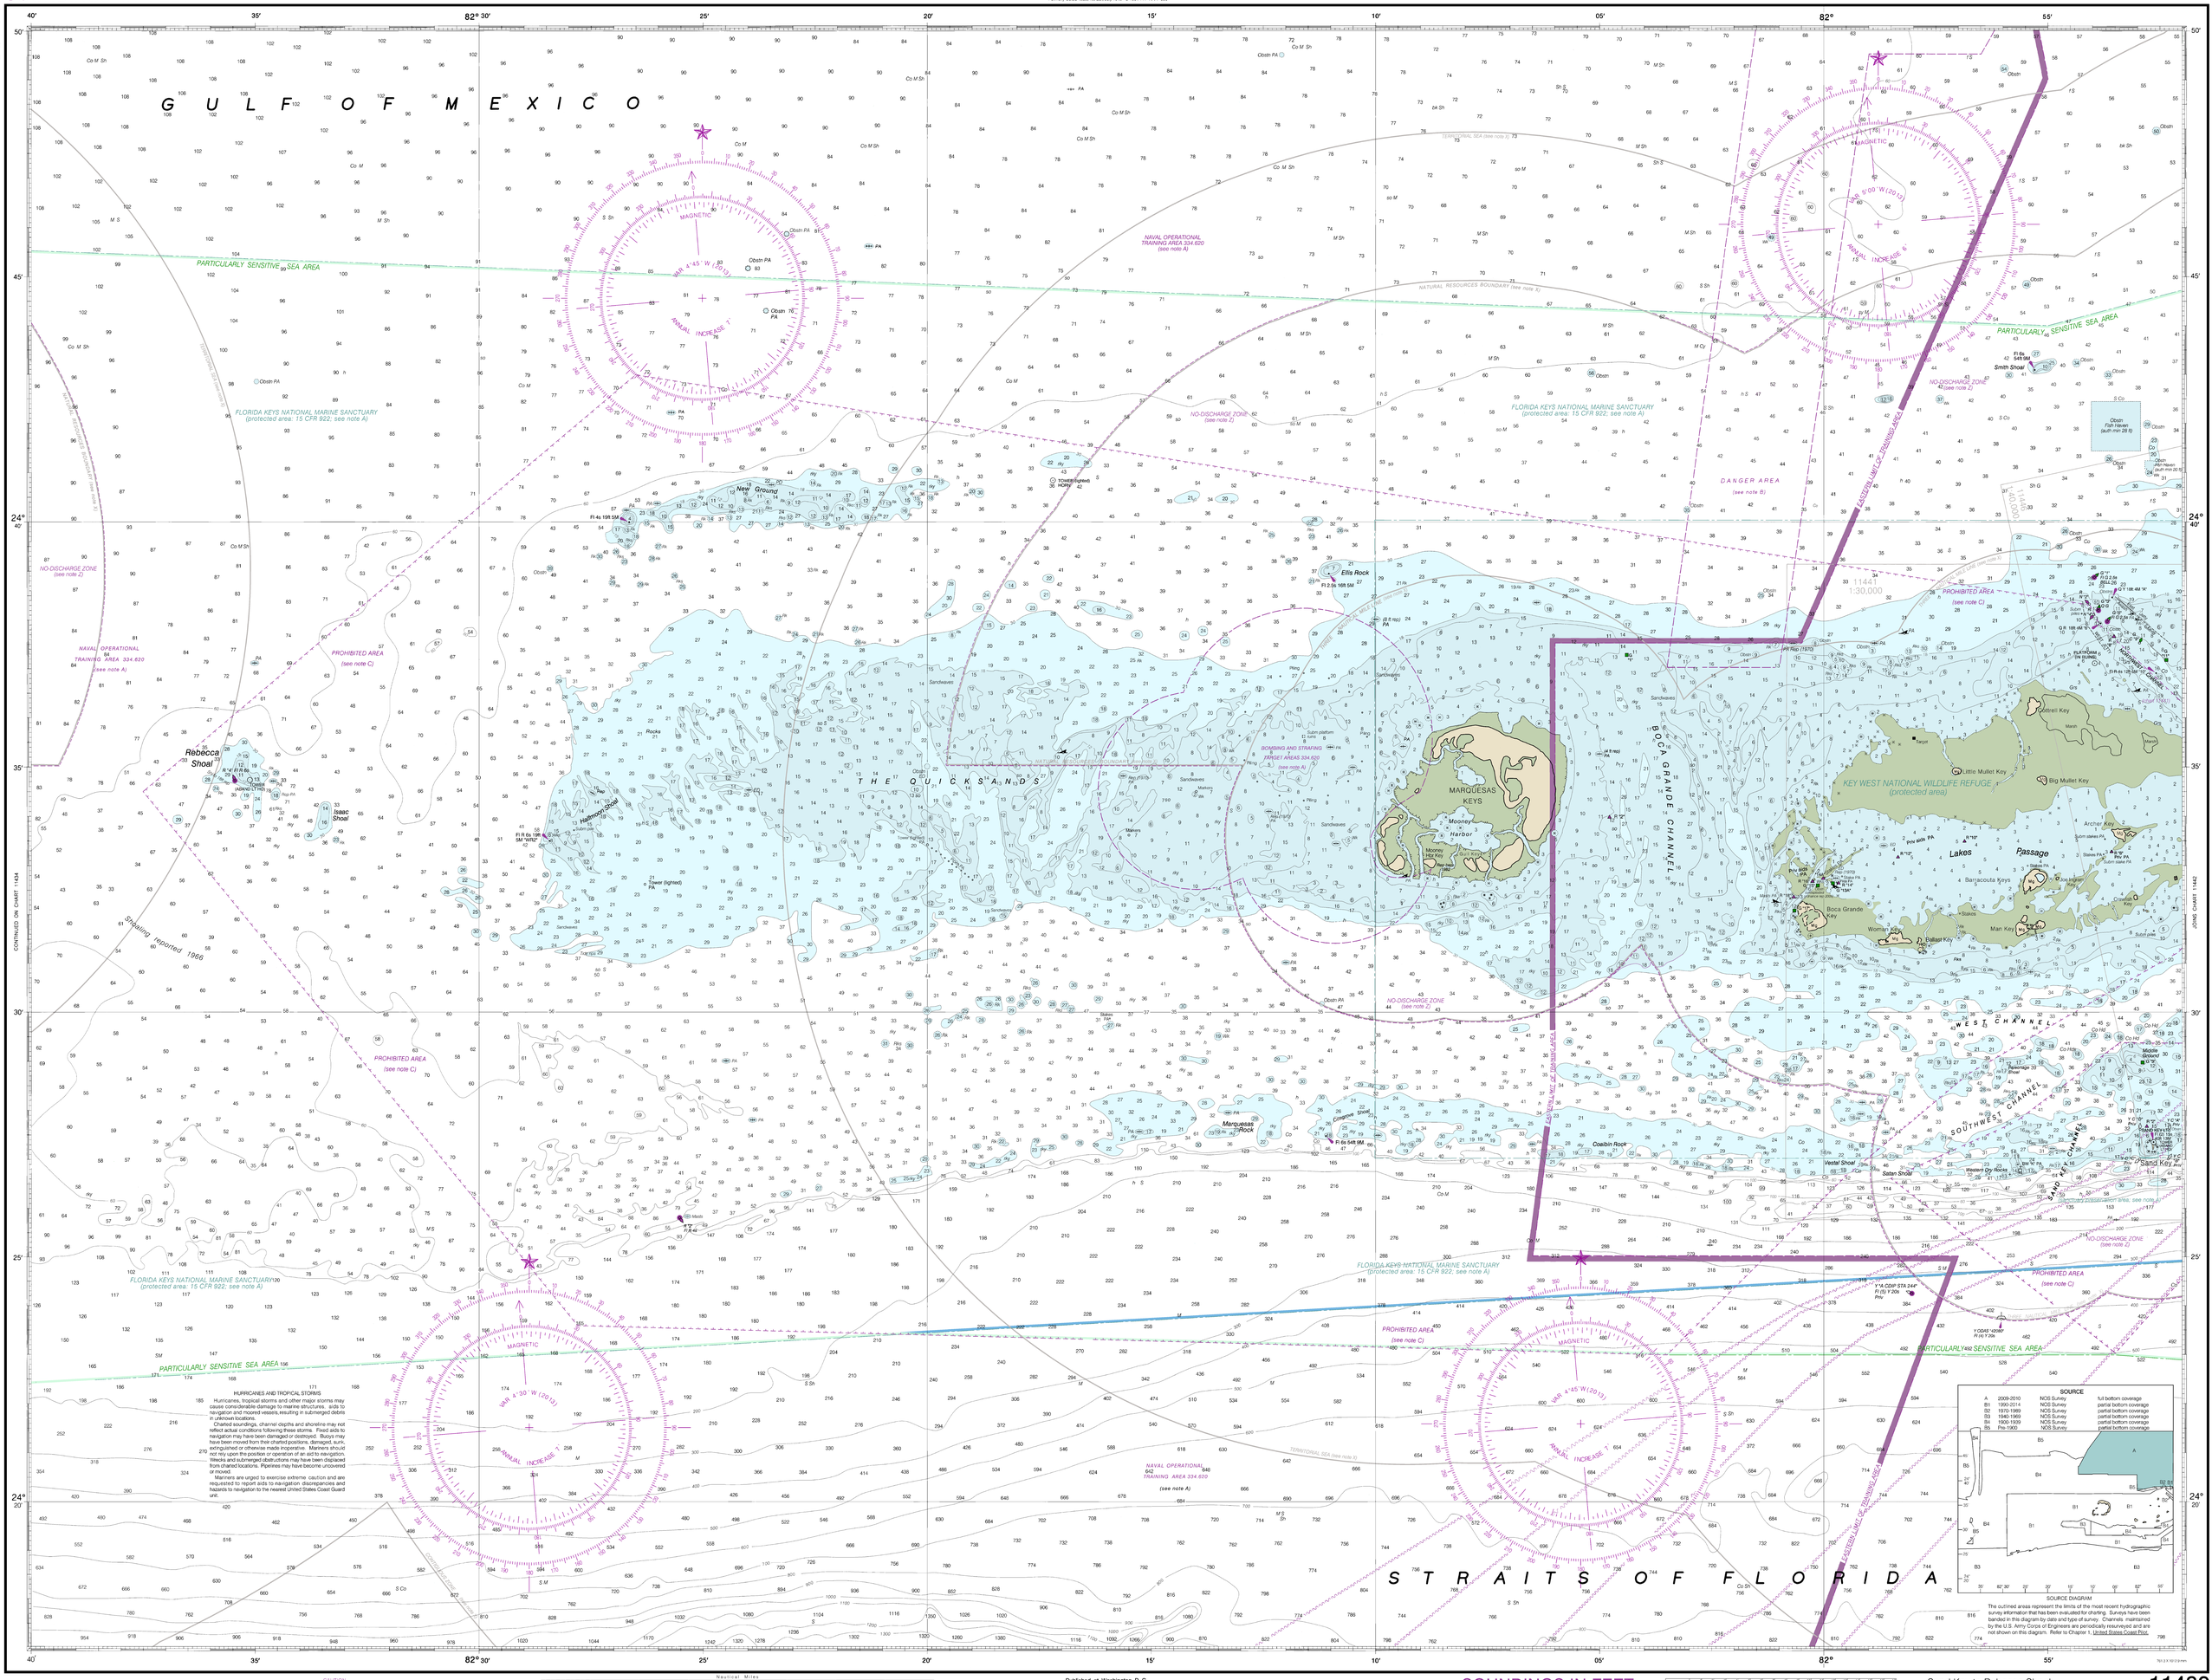

HURRICANES AND TROPICAL STORMS

Hurricanes, tropical storms and other major storms may cause considerable damage to marine structures, aids to navigation and moored vessels, resulting in submerged debris in unknown locations.

Charted soundings, channel depths and shoreline may not reflect actual conditions following these storms. Fixed aids to navigation may have been damaged or destroyed. Buoys may have been moved from their charted positions, damaged, sunk, extinguished or otherwise made inoperative. Mariners should not rely upon the position or operation of an aid to navigation. Wrecks and submerged obstructions may have been displaced from charted locations. Pipelines may have become uncovered or moved.

Mariners are urged to exercise extreme caution and are requested to report aids to navigation discrepancies and hazards to navigation to the nearest United States Coast Guard unit.

SOURCE

A	2009-2010	NOS Survey	full bottom coverage
B1	1990-2014	NOS Survey	partial bottom coverage
B2	1970-1969	NOS Survey	partial bottom coverage
B3	1940-1969	NOS Survey	partial bottom coverage
B4	1900-1939	NOS Survey	partial bottom coverage
B5	Pre-1900	NOS Survey	partial bottom coverage

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

11439

CAUTION
This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

This chart is canceled. No new editions will be issued.

29th Ed., Jun. 2019. Last Correction: 9/25/2022. Cleared through
LNM: 50/22 (12/13/2022); NM: 52/22 (12/24/2022)
To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

Nautical Miles: 1 0 1 2 3 4 5 6 7
Yards: 1000 0 2000 4000 6000 8000 10000
Meters: 1000 0 2000 4000 6000 8000 10000

Published at Washington, D. C.
U. S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

SOUNDINGS IN FEET

FATHOMS	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70
FEET	0	12	24	36	48	60	72	84	96	108	120	132	144	156	168
METERS	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14

Sand Key to Rebecca Shoal
SOUNDINGS IN FEET - SCALE 1:80,000

11439