



UNITED STATES - GREAT LAKES

MICHIGAN

NAUTICAL CHART 14886

INLAND ROUTE

Cheboygan to Conway

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

CAUTION


This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

NOAA encourages users to submit inquiries, discrepancies or comments about this chart at <http://www.nauticalcharts.noaa.gov/staff/contact.htm>.

14886

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.

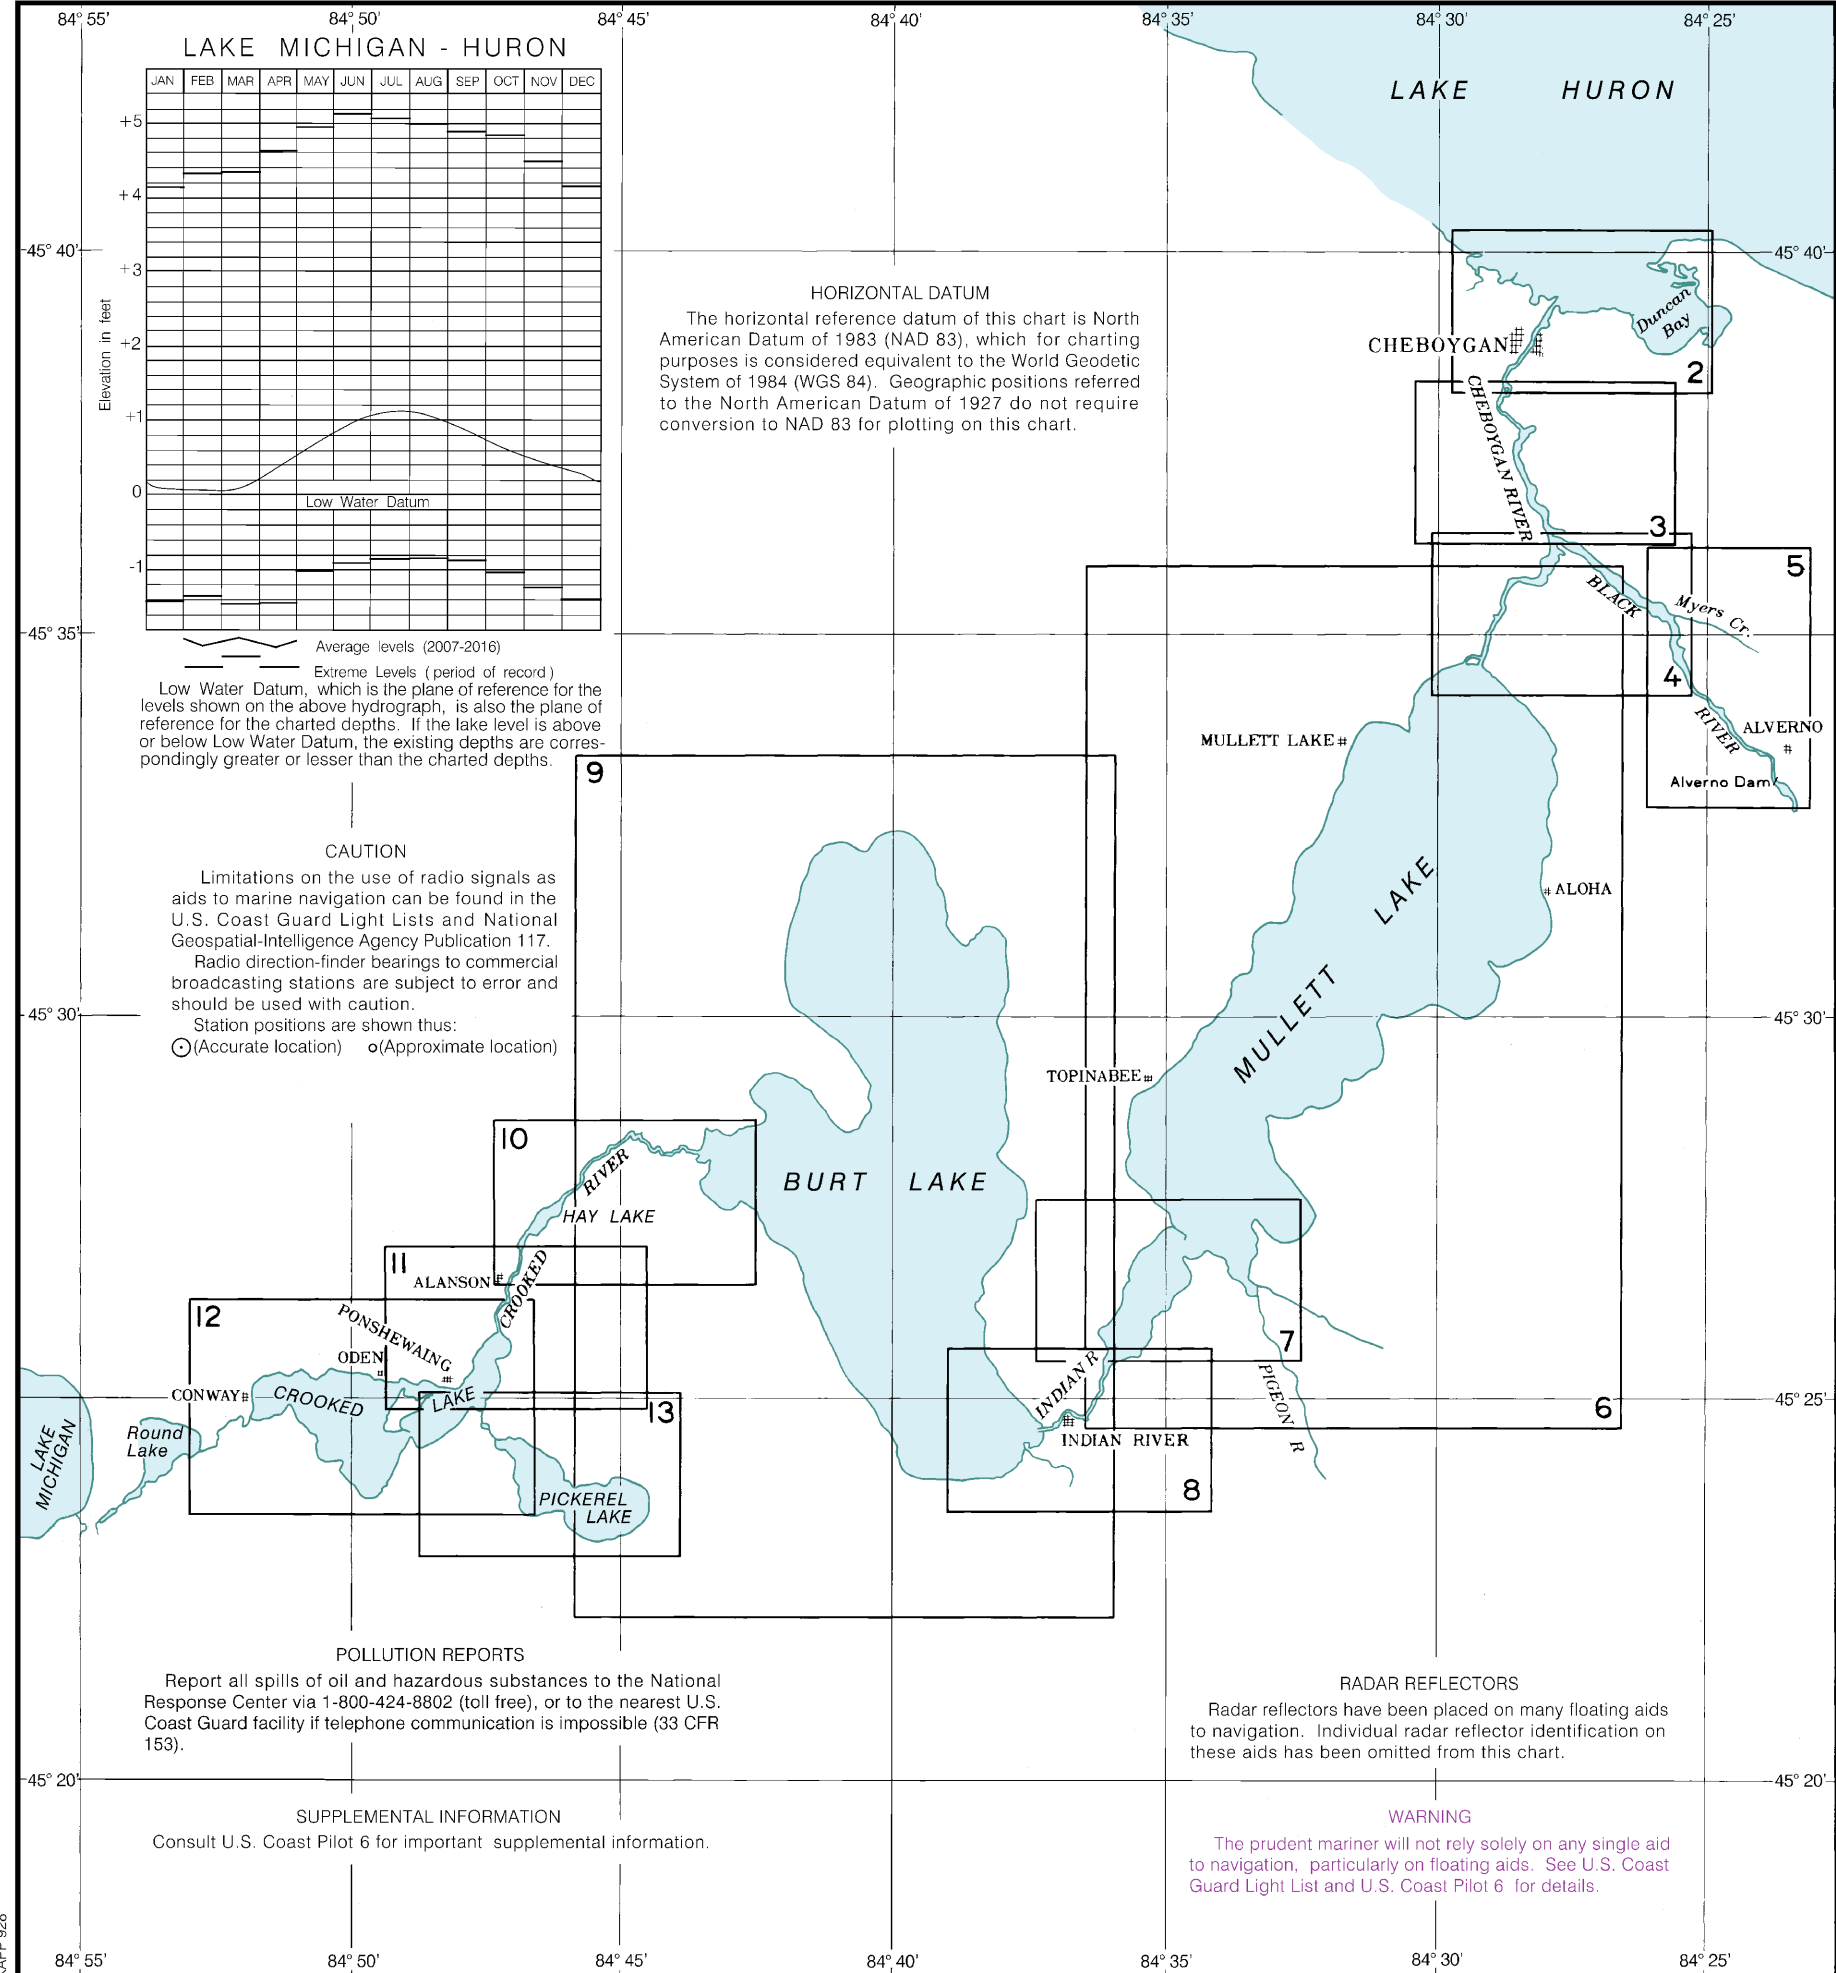

INDEX TO SHEETS OF INLAND ROUTE FROM CHEBOYGAN TO CONWAY, MICHIGAN INCLUDING MULLETT, BURT, CROOKED AND PICKEREL LAKES

Polyconic Projection
North American Datum of 1983
(World Geodetic System 1984)

NOTES

PLANES OF REFERENCE OF THIS CHART (Low Water Datum). Lake Huron, 577.5 feet-Mullett Lake, 592.5 feet-Burt Lake, 593.8 feet-Pickerel and Crooked Lakes, 595.4 feet-and for the Connecting Rivers it is the sloping surface of the river when the adjoining lakes are at Low Water Datum.
Referred to mean water level at Rimouski ,Quebec, international Great Lakes Datum (1985).

AIDS TO NAVIGATION. Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

SYMBOLS AND ABBREVIATIONS. For complete list of symbols and abbreviations see Chart No. 1.

AUTHORITIES. Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the Corps of Engineers, Geological Survey and U.S. Coast Guard.

BRIDGE AND OVERHEAD CABLE CLEARANCES. When the water surface is above Low Water Datum, bridge and overhead clearances are reduced correspondingly. For clearances see U.S. Coast Pilot 6.

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 6. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 9th Coast Guard District in Cleveland, Ohio or at the Office of the District Engineer, Corps of Engineers in Detroit, Michigan.
Refer to charted regulation section numbers.

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio stations listed below provide continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Alpena, MI	KIG-83	162.550 MHz
Gaylord, MI	WWF-70	162.500 MHz
Sault Ste. Marie, MI	KIG-74	162.550 MHz
Traverse City, MI	KIH-22	162.400 MHz

NOTE B

The channel legend reflects the Corps of Engineers project depth. The Corps of Engineers publishes the controlling depth periodically in the U.S. Coast Guard Local Notice to Mariners. For further information on channel depths, direct inquiries to the Office of the District Engineer, Corps of Engineers, Detroit, Michigan.

CAUTION

Improved channels shown by broken lines are subject to shoaling, particularly at the edges.

CAUTION

USACE conducts hydrographic surveys to monitor navigation conditions. These surveys are not intended to detect underwater features. Uncharted features hazardous to surface navigation are not expected but may exist in federal channels.

Pump-out facilities

NOTE Z

NO-DISCHARGE ZONE, 40 CFR 140

Michigan waters of Lakes Michigan, Huron, Superior, Erie and St. Clair, all waterways connected thereto, and all inland lakes are designated as a No-Discharge Zone (NDZ). This chart falls entirely within the limits of a No-Discharge Zone (NDZ). Under the Clean Water Act, Section 312, all vessels operating within a No-Discharge Zone (NDZ) are completely prohibited from discharging any sewage, treated or untreated, into the waters. Commercial vessel sewage shall include graywater. All vessels with an installed marine sanitation device (MSD) that are navigating, moored, anchored, or docked within a NDZ must have the MSD disabled to prevent the overboard discharge of sewage (treated or untreated) or install a holding tank. Regulations for the NDZ are contained in the U.S. Coast Pilot. Additional information concerning the regulations and requirements may be obtained from the Environmental Protection Agency (EPA) web site: http://www.epa.gov/owow/oceans/regulatory/vessel_sewage/.

CAUTION

Due to periodic high water conditions in the Great Lakes, some features charted as visible at Low Water Datum may be submerged, particularly in the near shore areas. Mariners should proceed with caution.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

During some winter months or when endangered by ice, certain aids to navigation are replaced by other types or removed. For details see U.S. Coast Guard Light List.

Additional information can be obtained at nauticalcharts.noaa.gov.

CAUTION

BASCULE BRIDGE CLEARANCES

For bascule bridges, whose spans do not open to a full upright or vertical position, unlimited vertical clearance is not available for the entire charted horizontal clearance.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

KAPP 928

14886

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)



This chart is canceled. No new editions will be issued.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).



JOINS 3


This chart is canceled. No new editions will be issued.

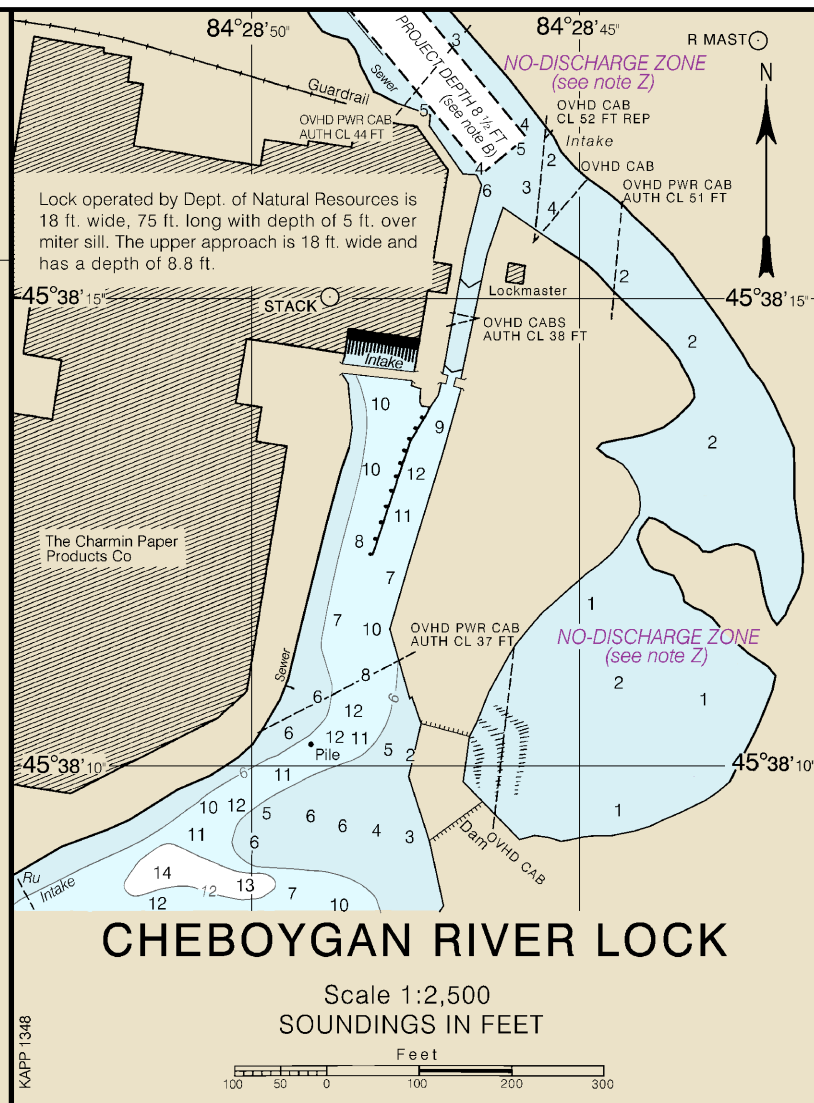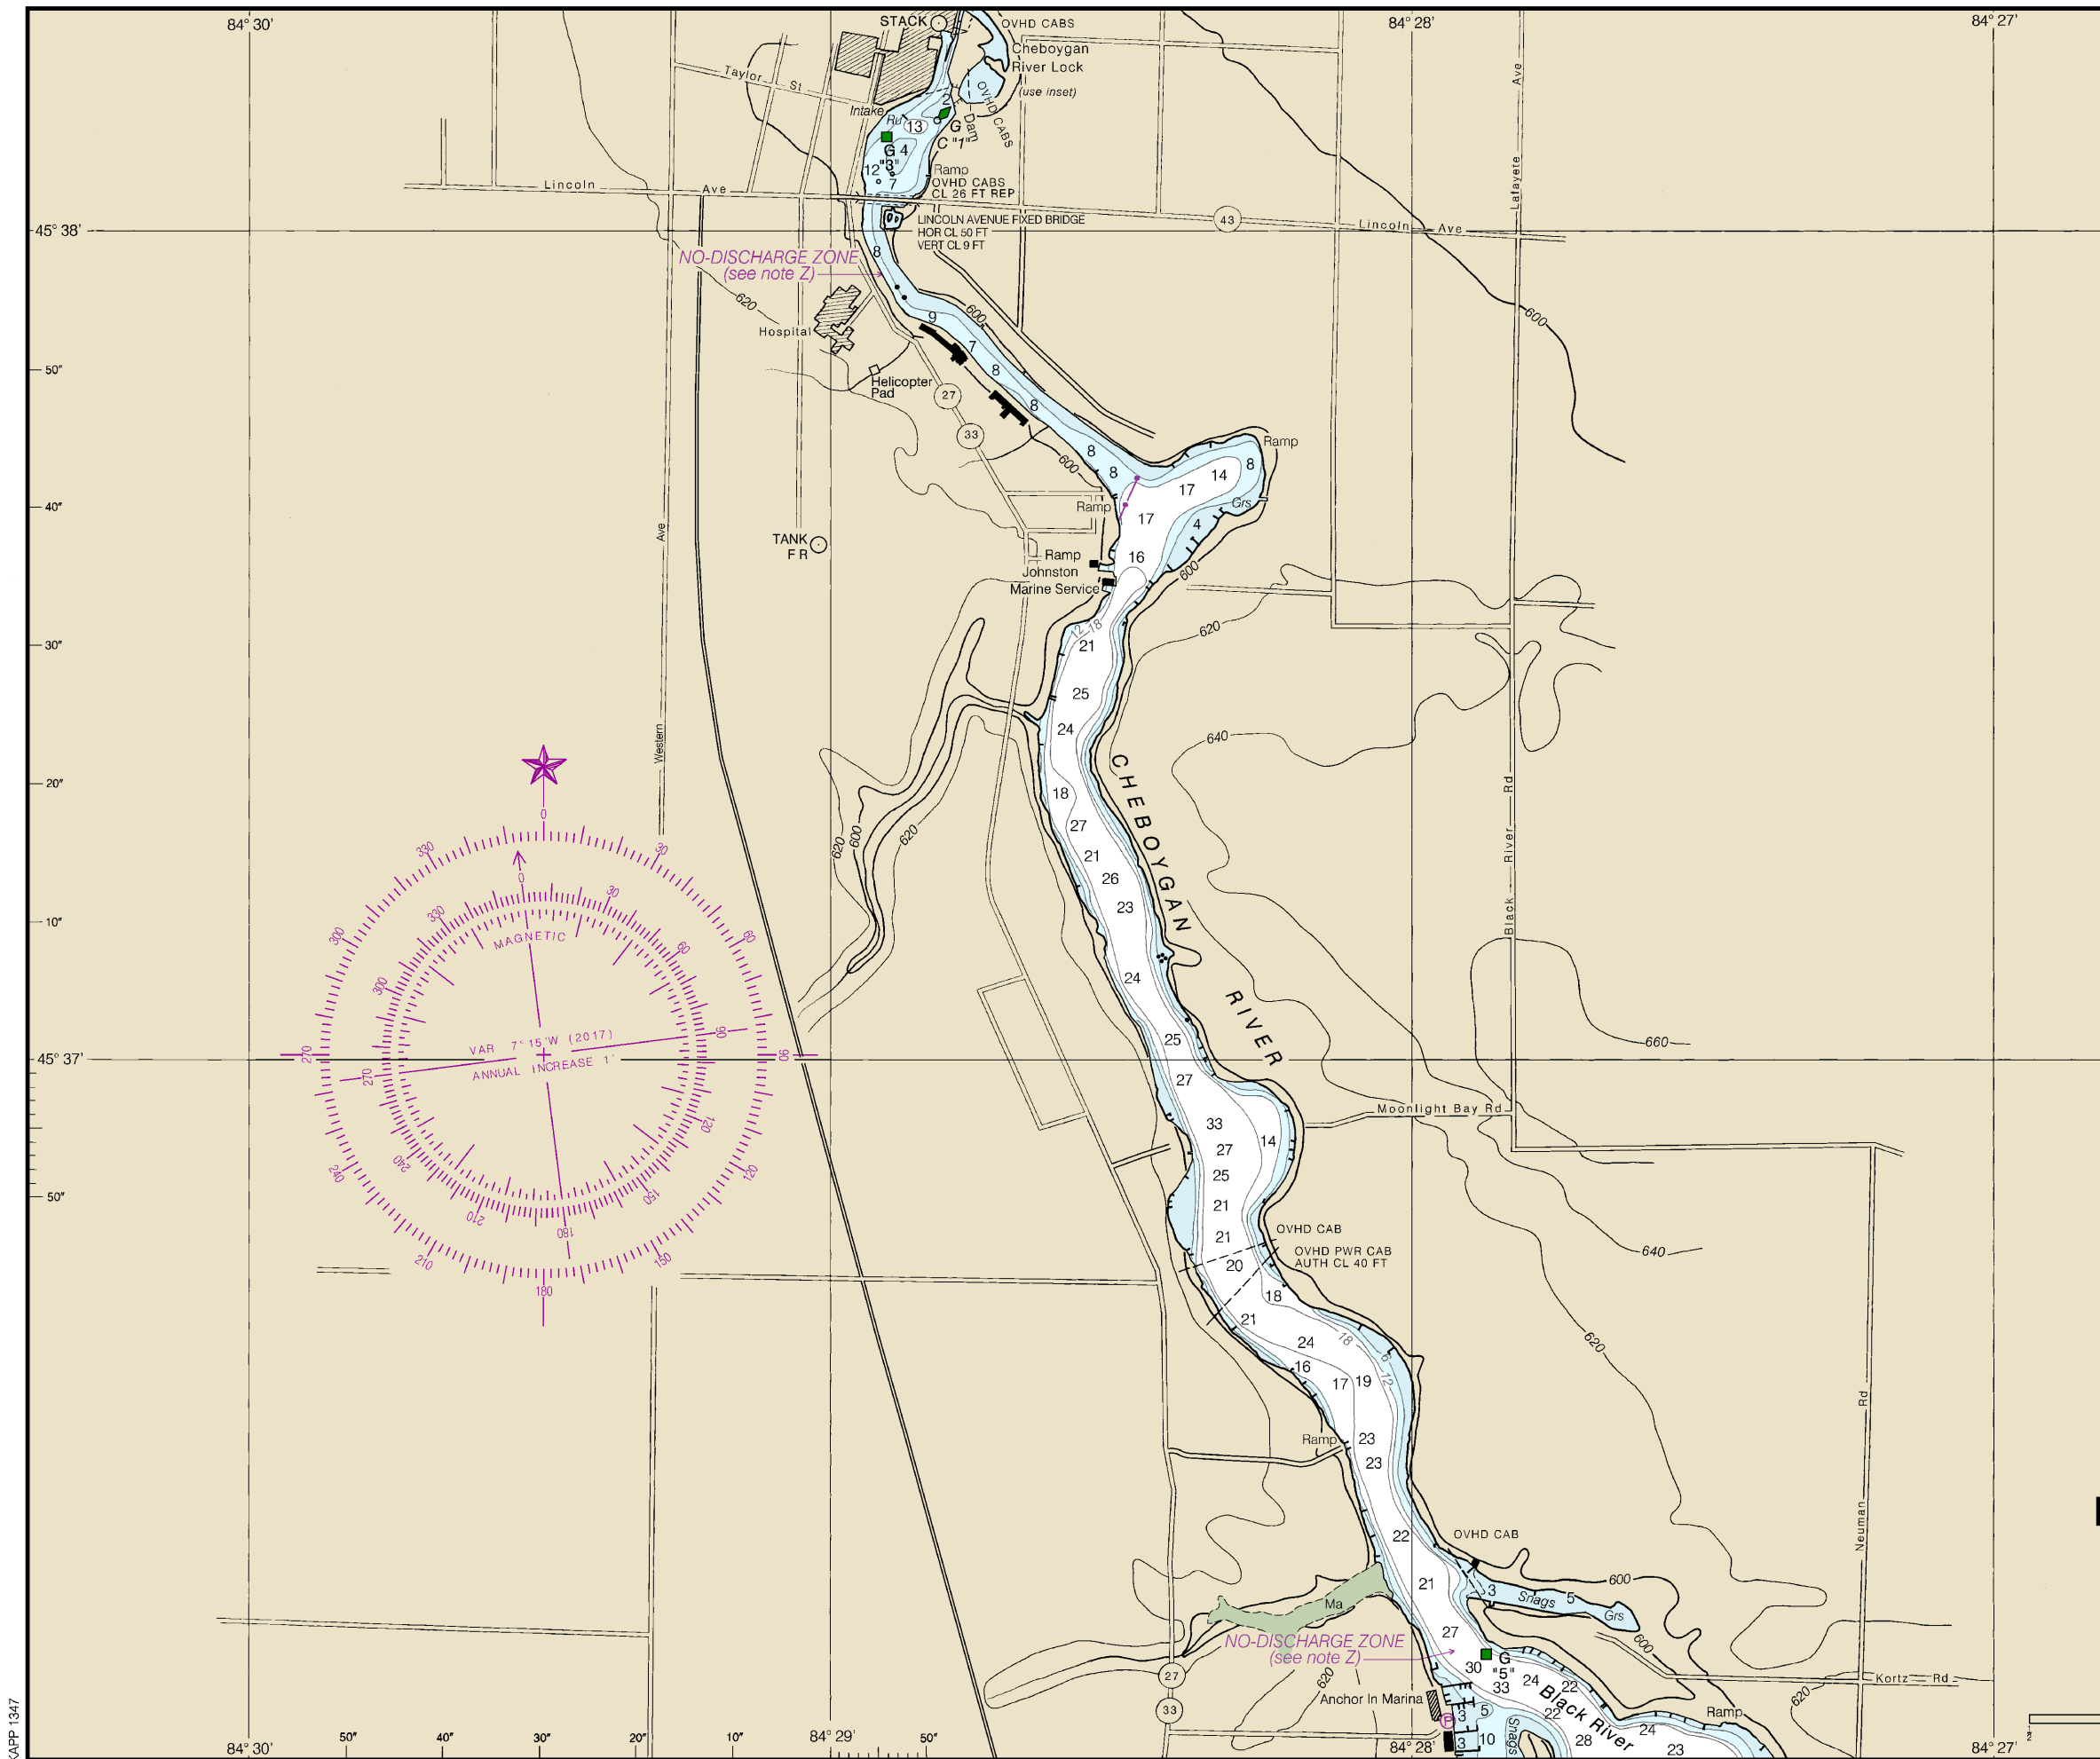

CHEBOYGAN RIVER LOCK OPERATION


Mariner should contact the Michigan Department of Natural Resources Parks and Recreation Division, Cheboygan Field Office for lock information.

For additional information on schedule and regulations, see U.S. Coast Pilot 6.

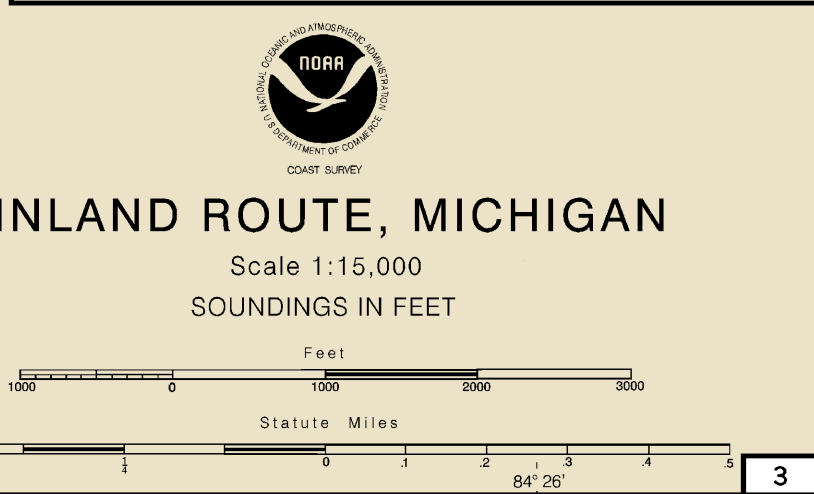

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)


This chart is canceled. No new editions will be issued.

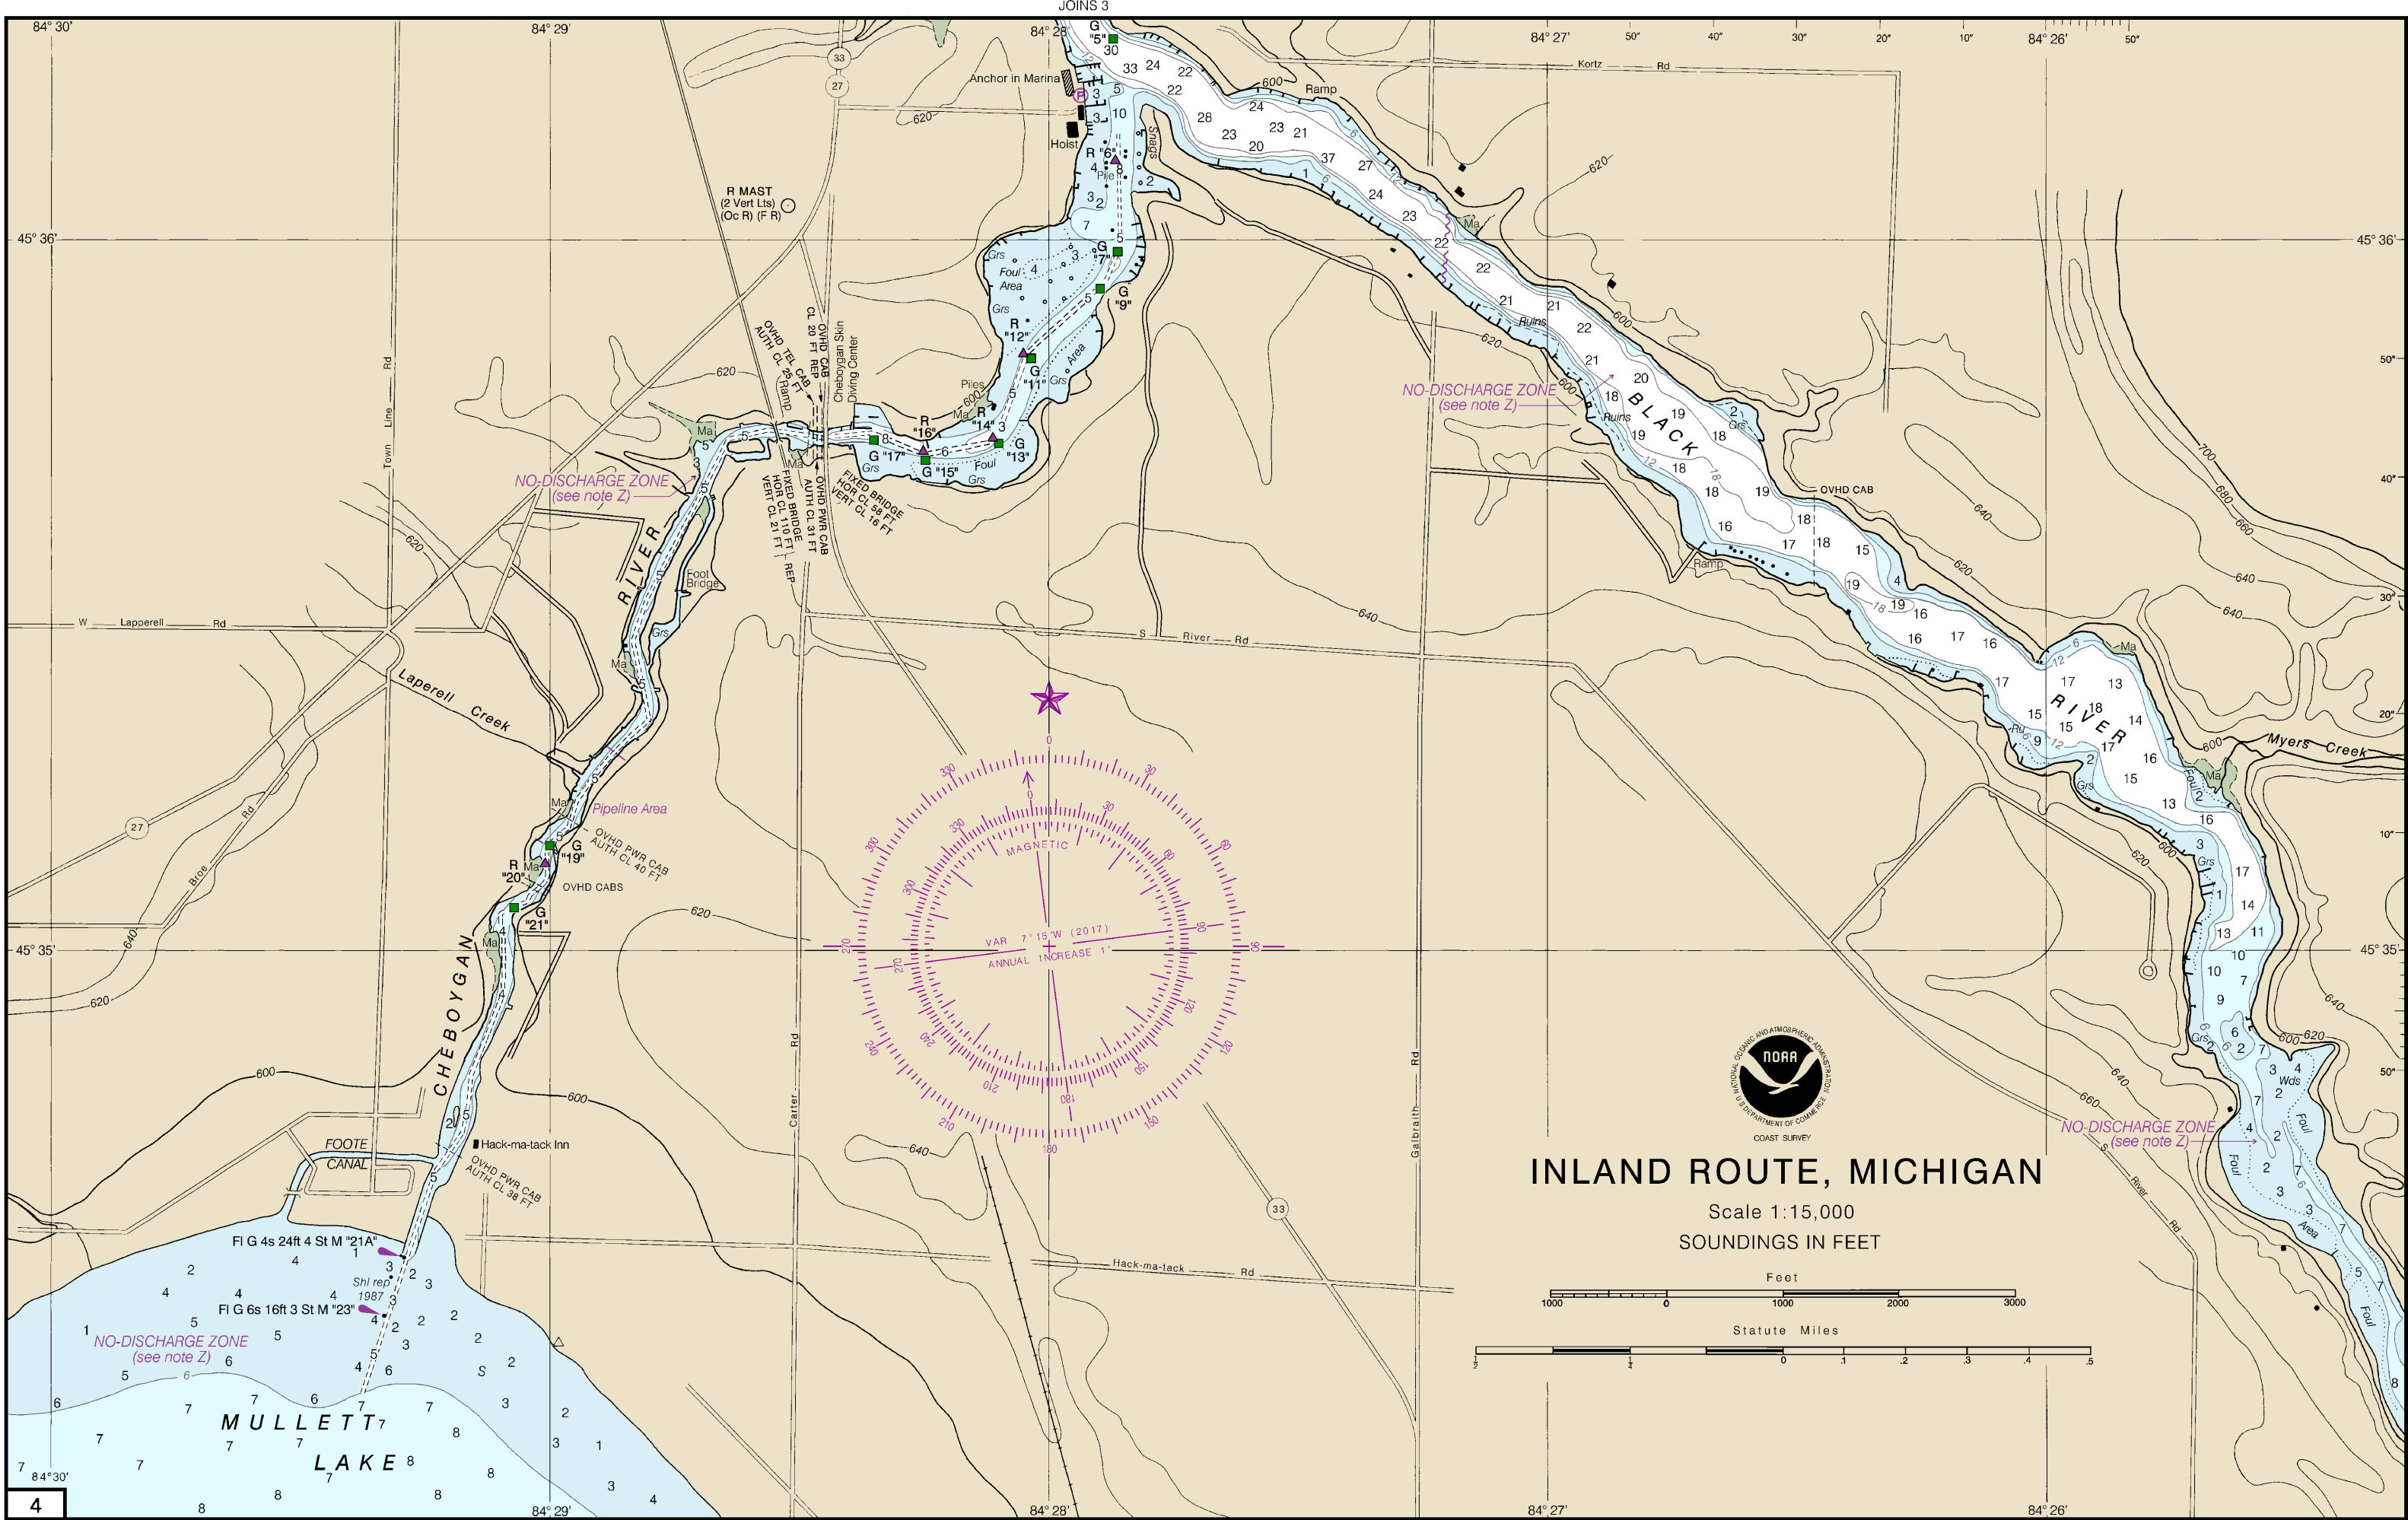

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

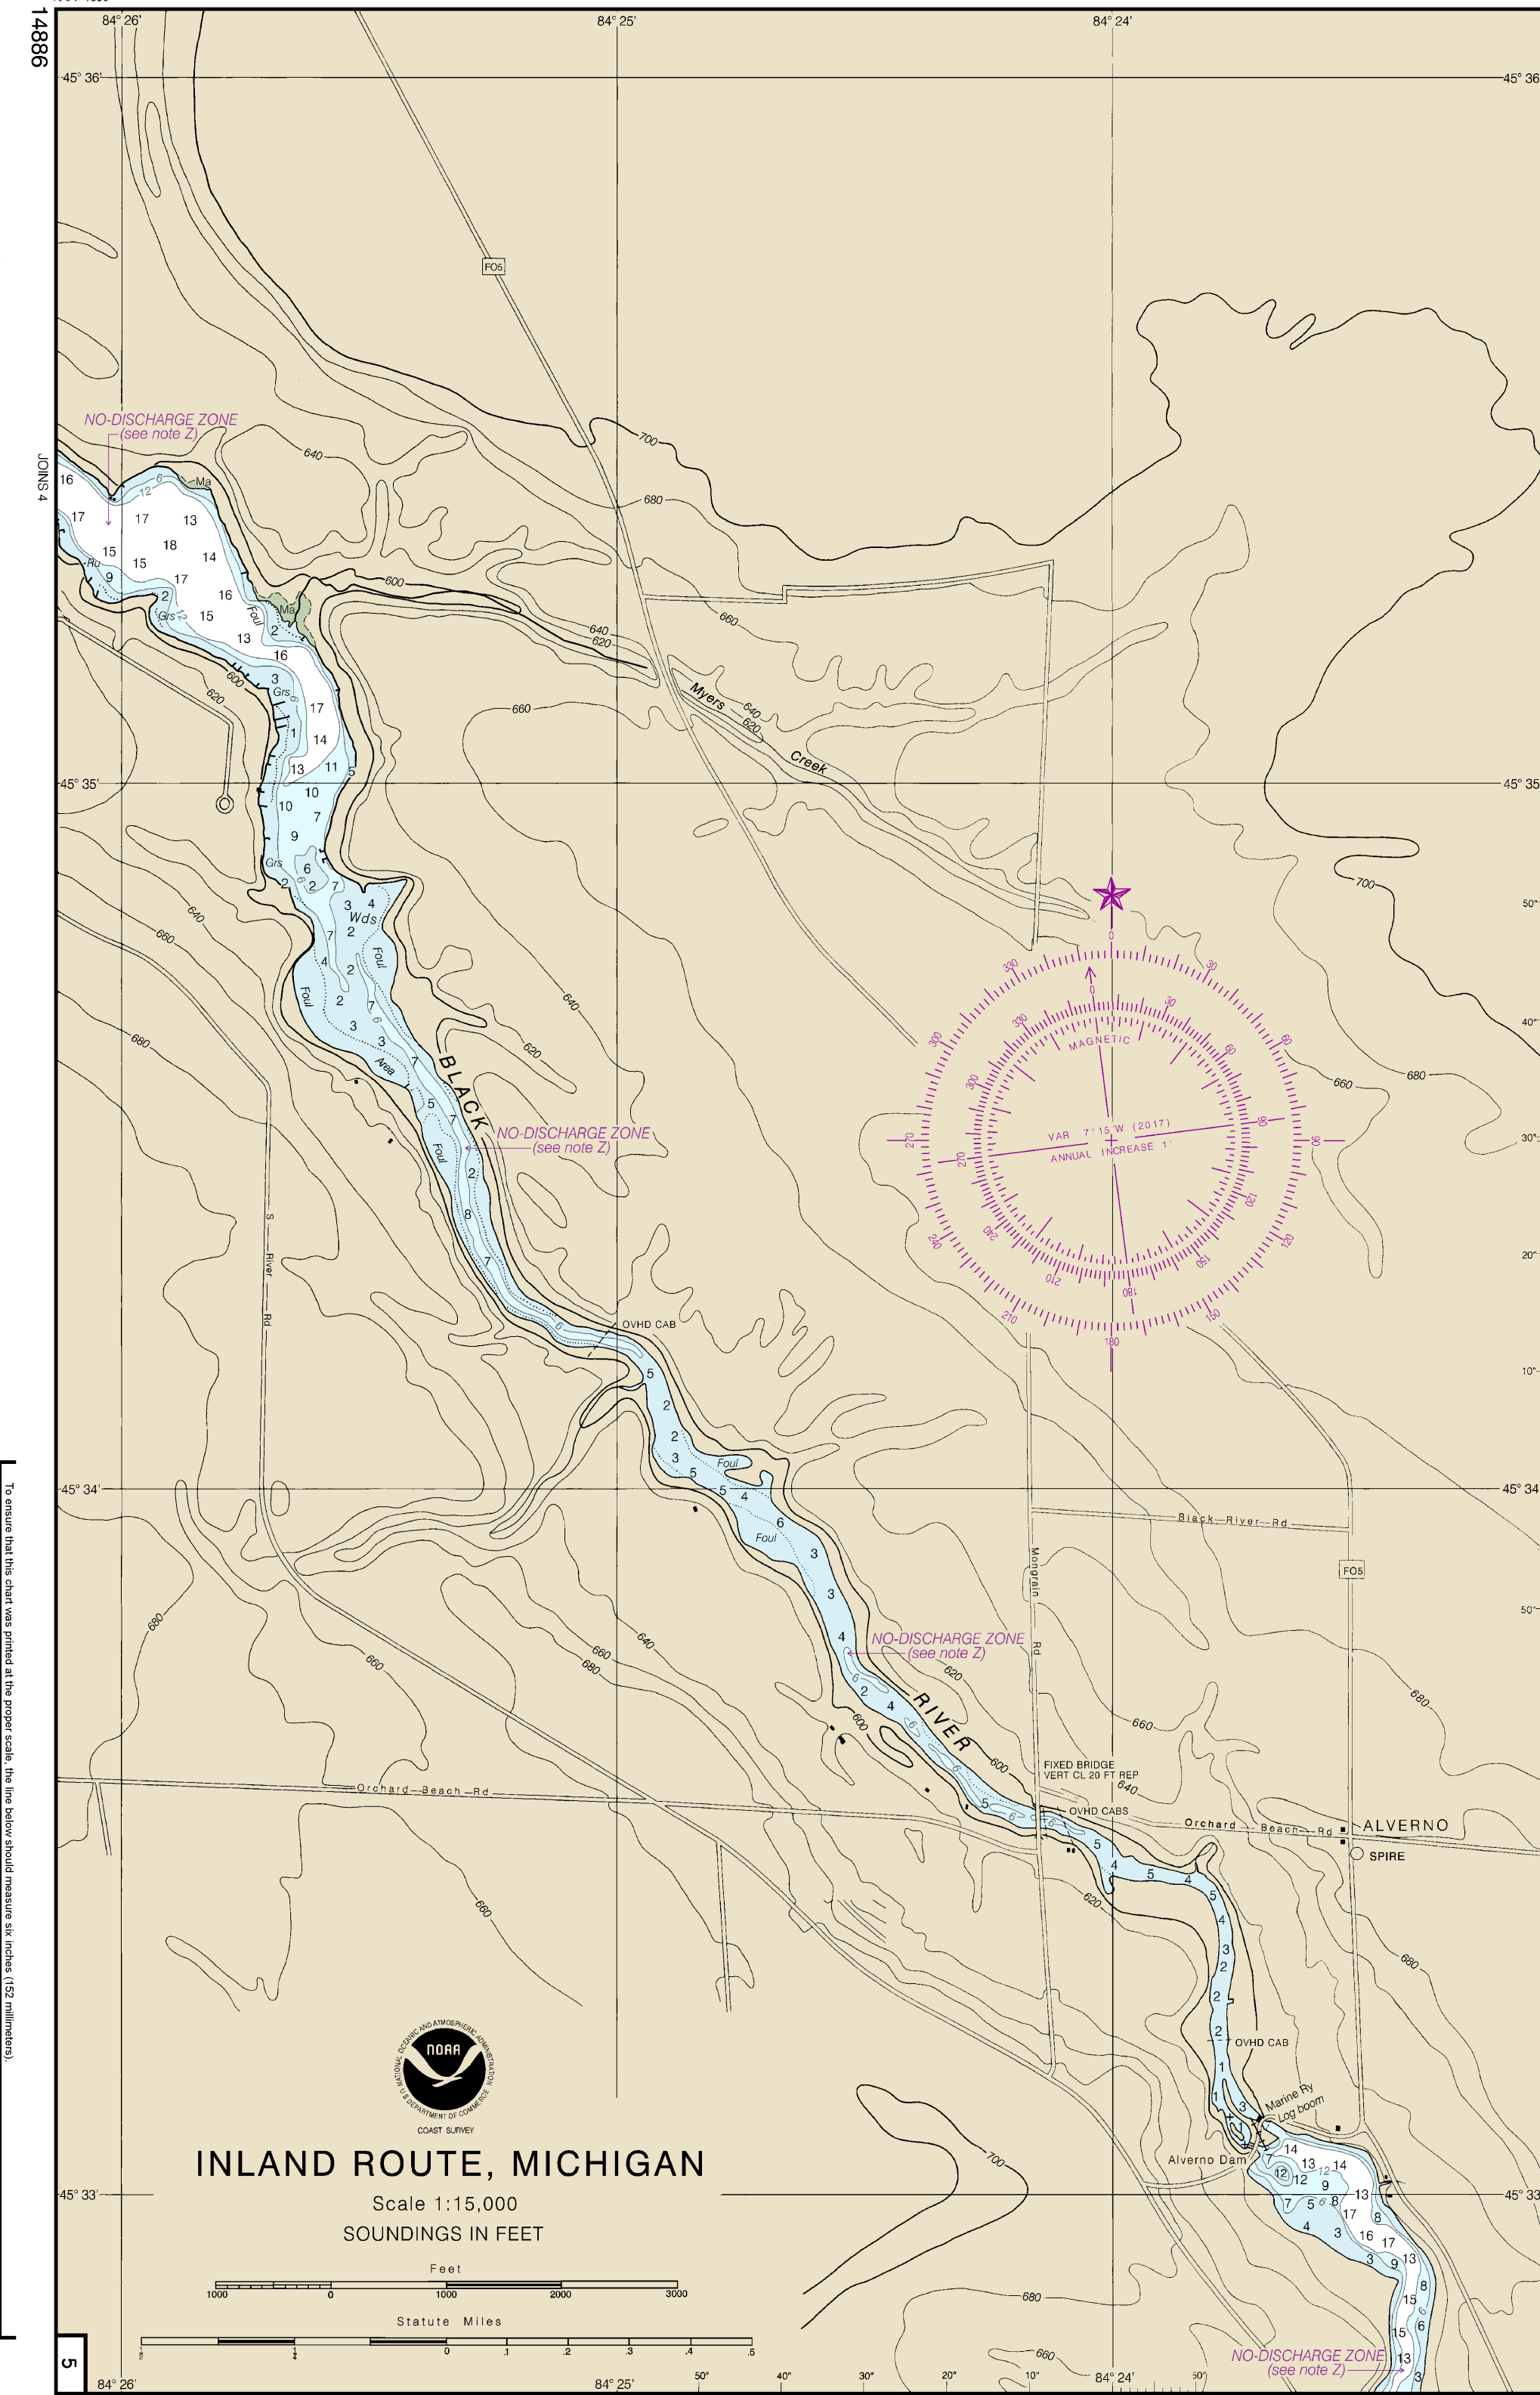


13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
FEET	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102
METERS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17

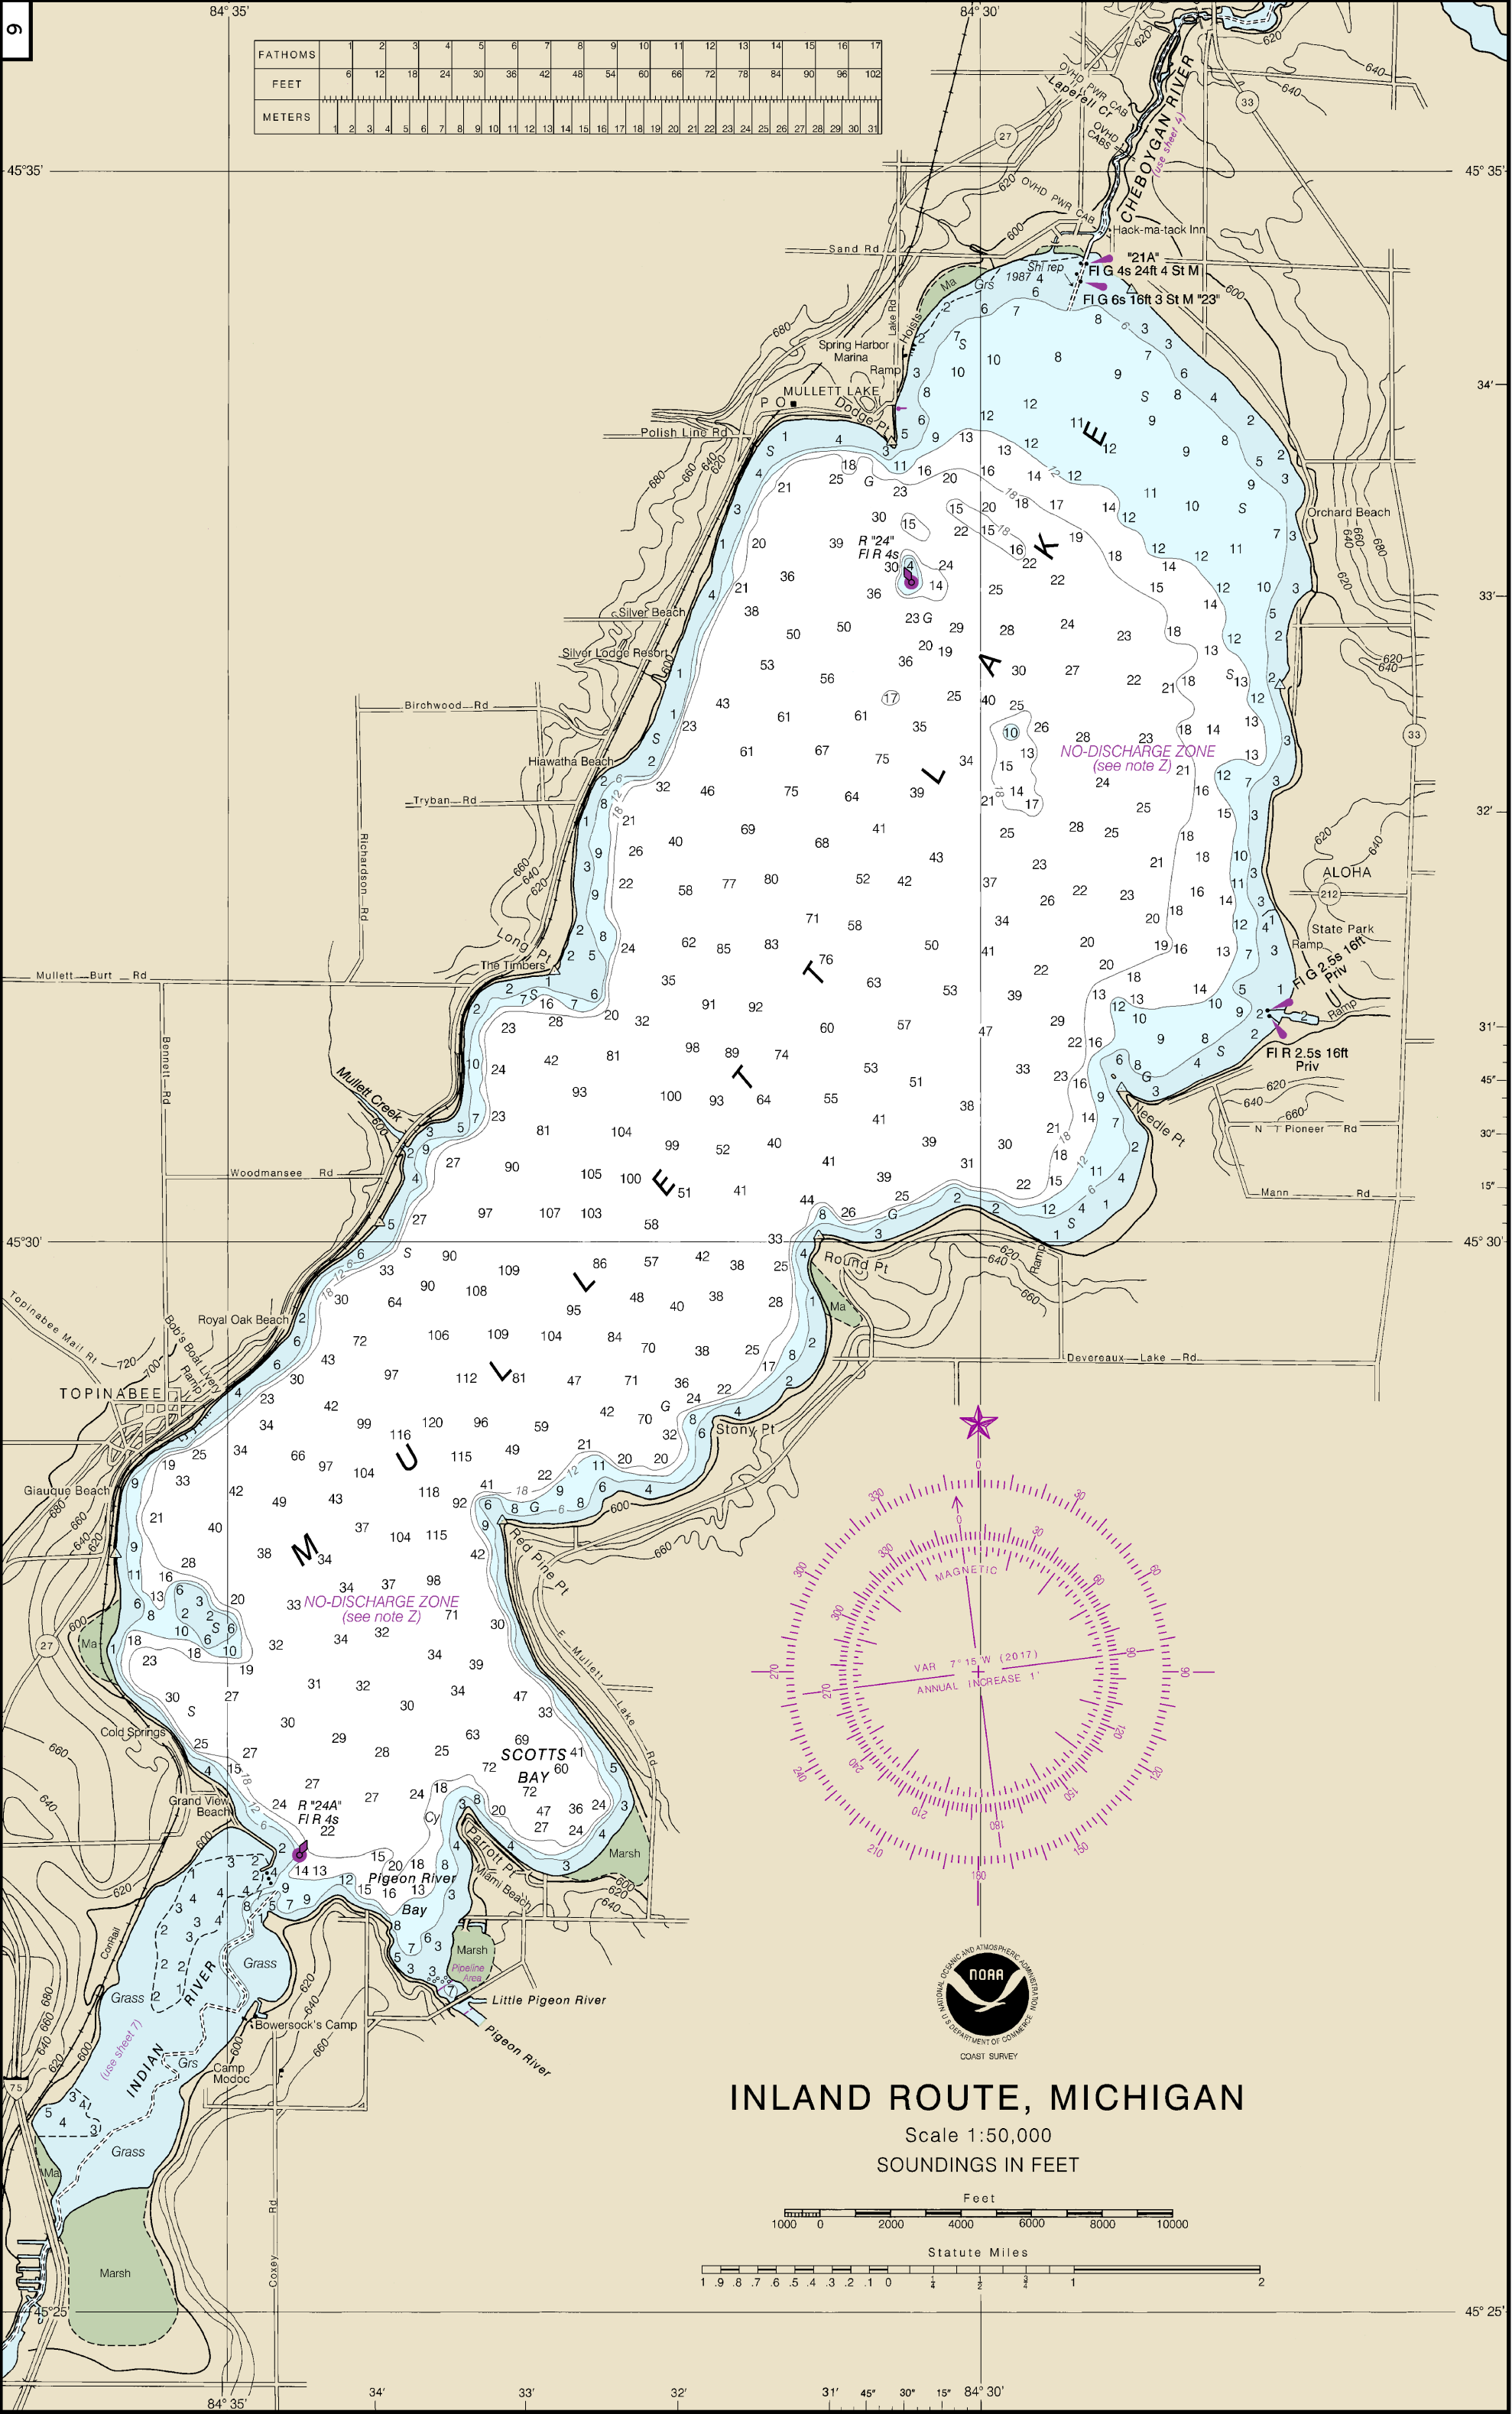


CONTINUED ON 8


13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

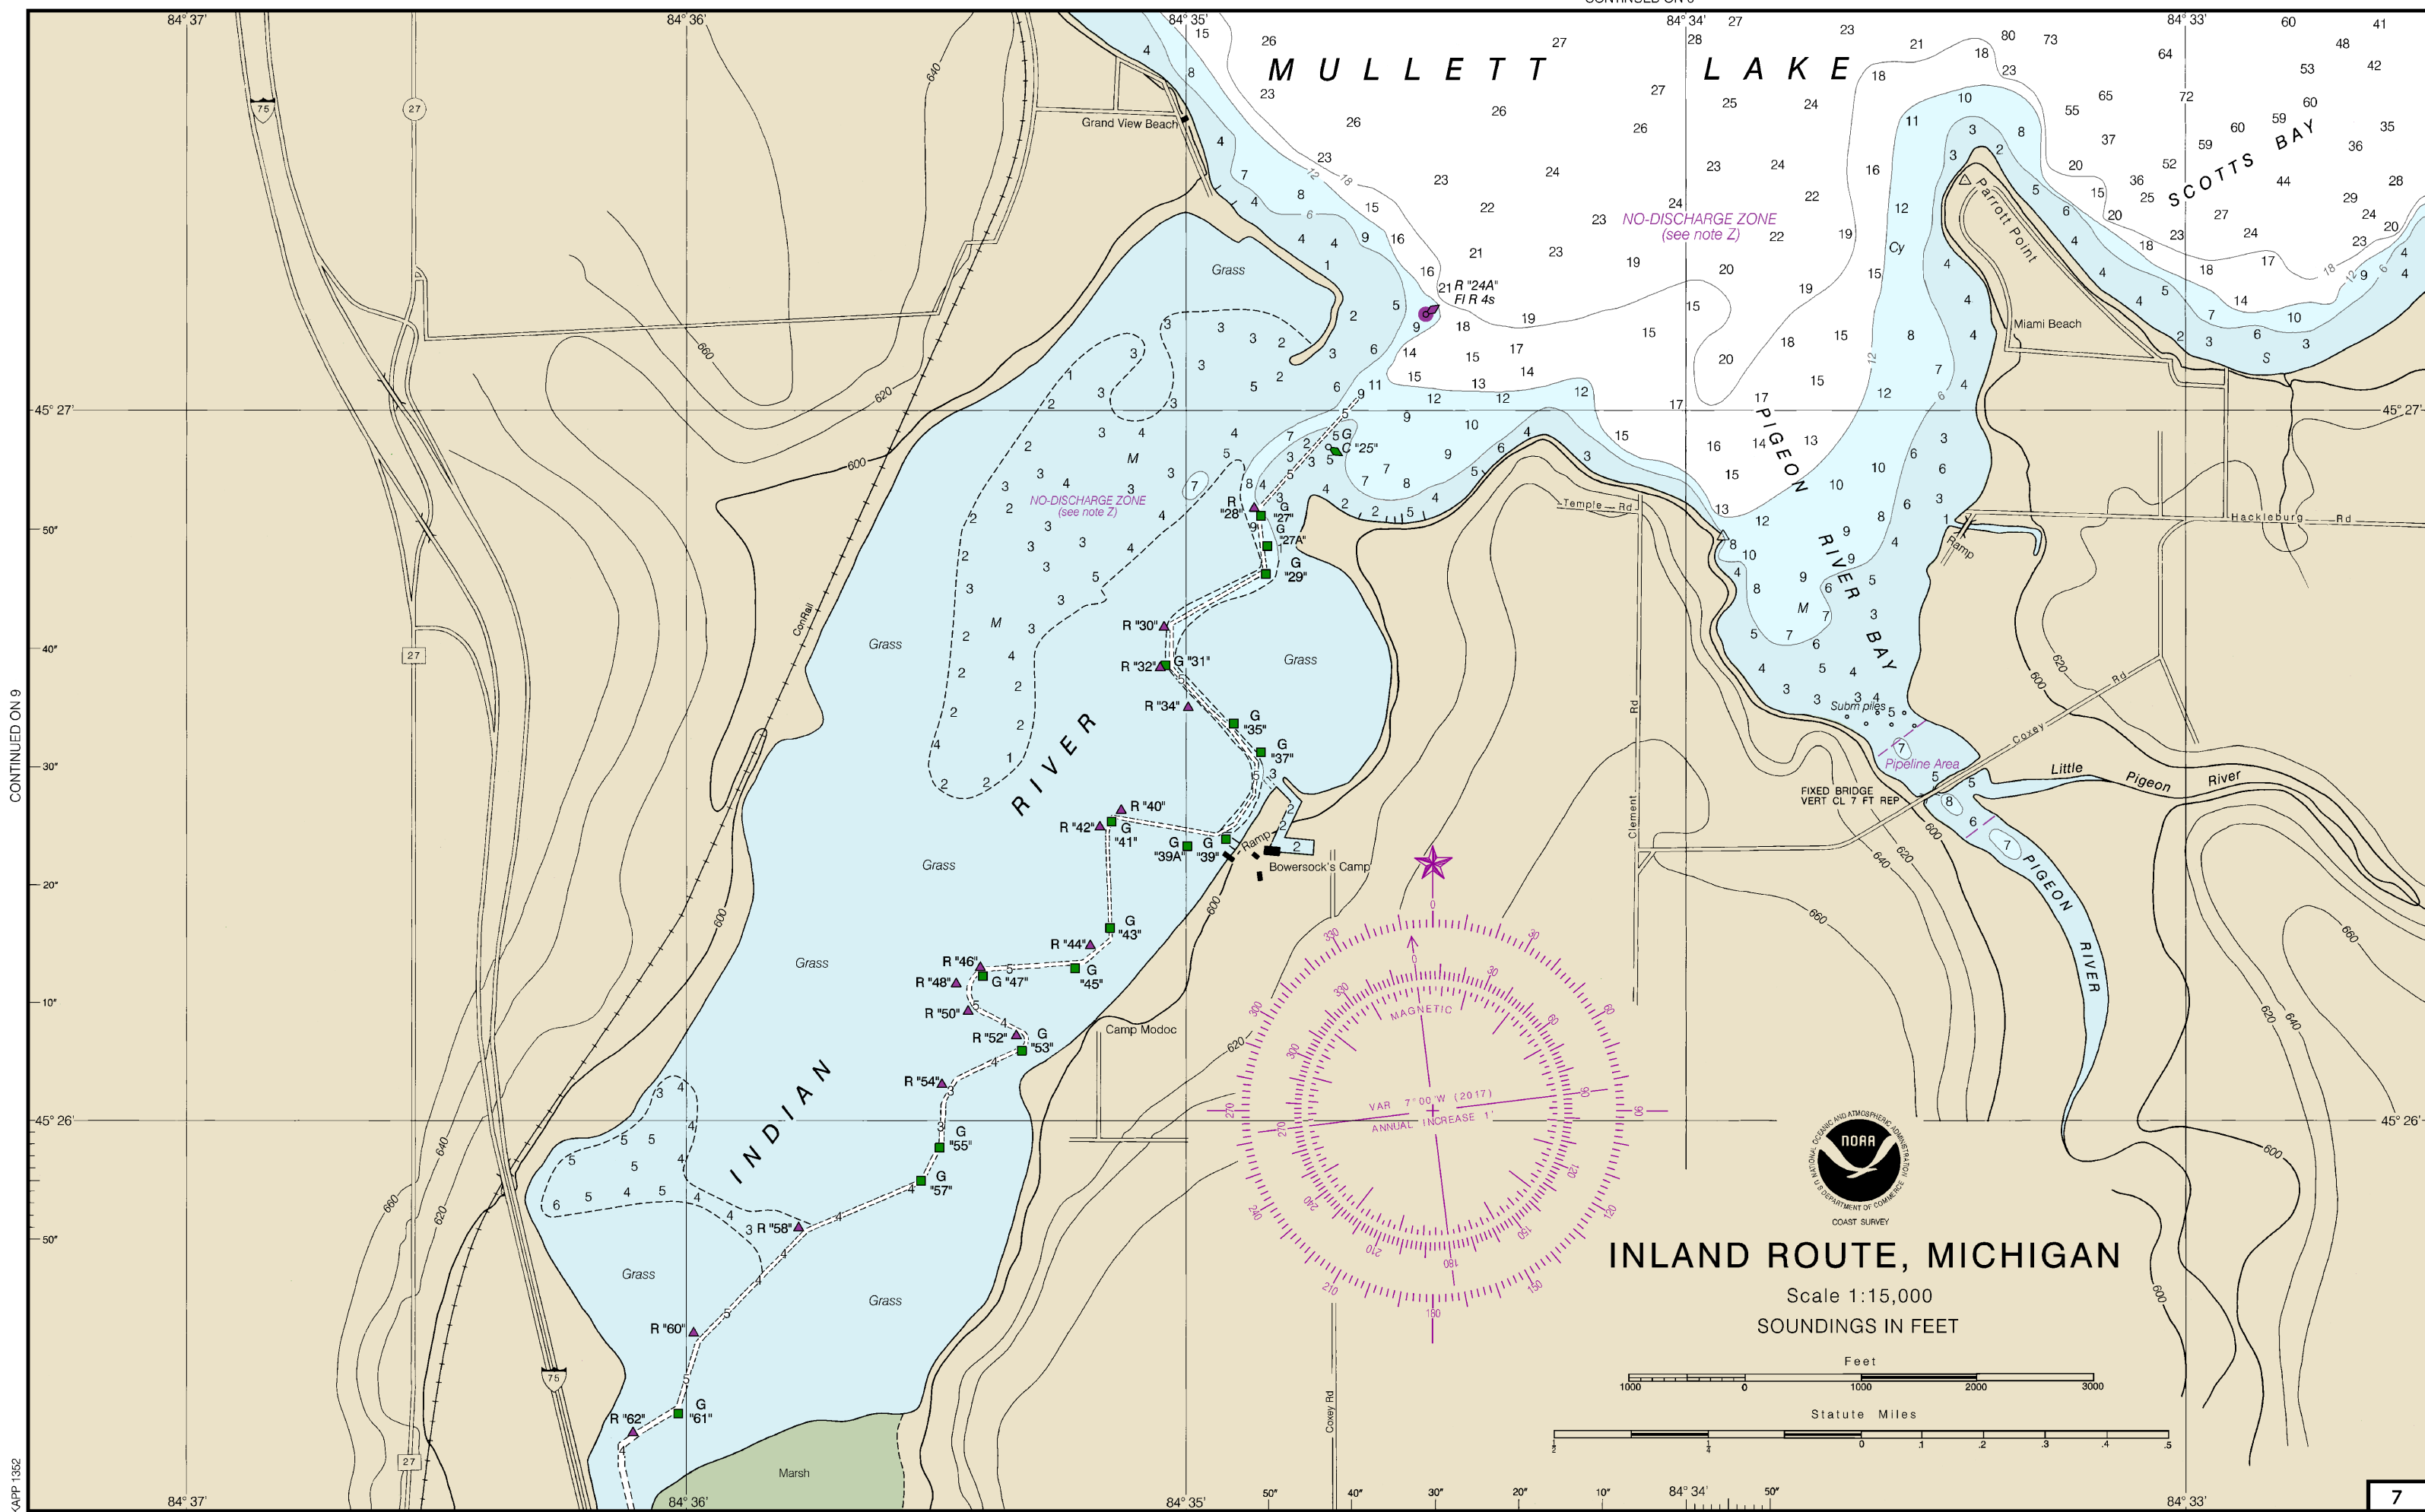

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

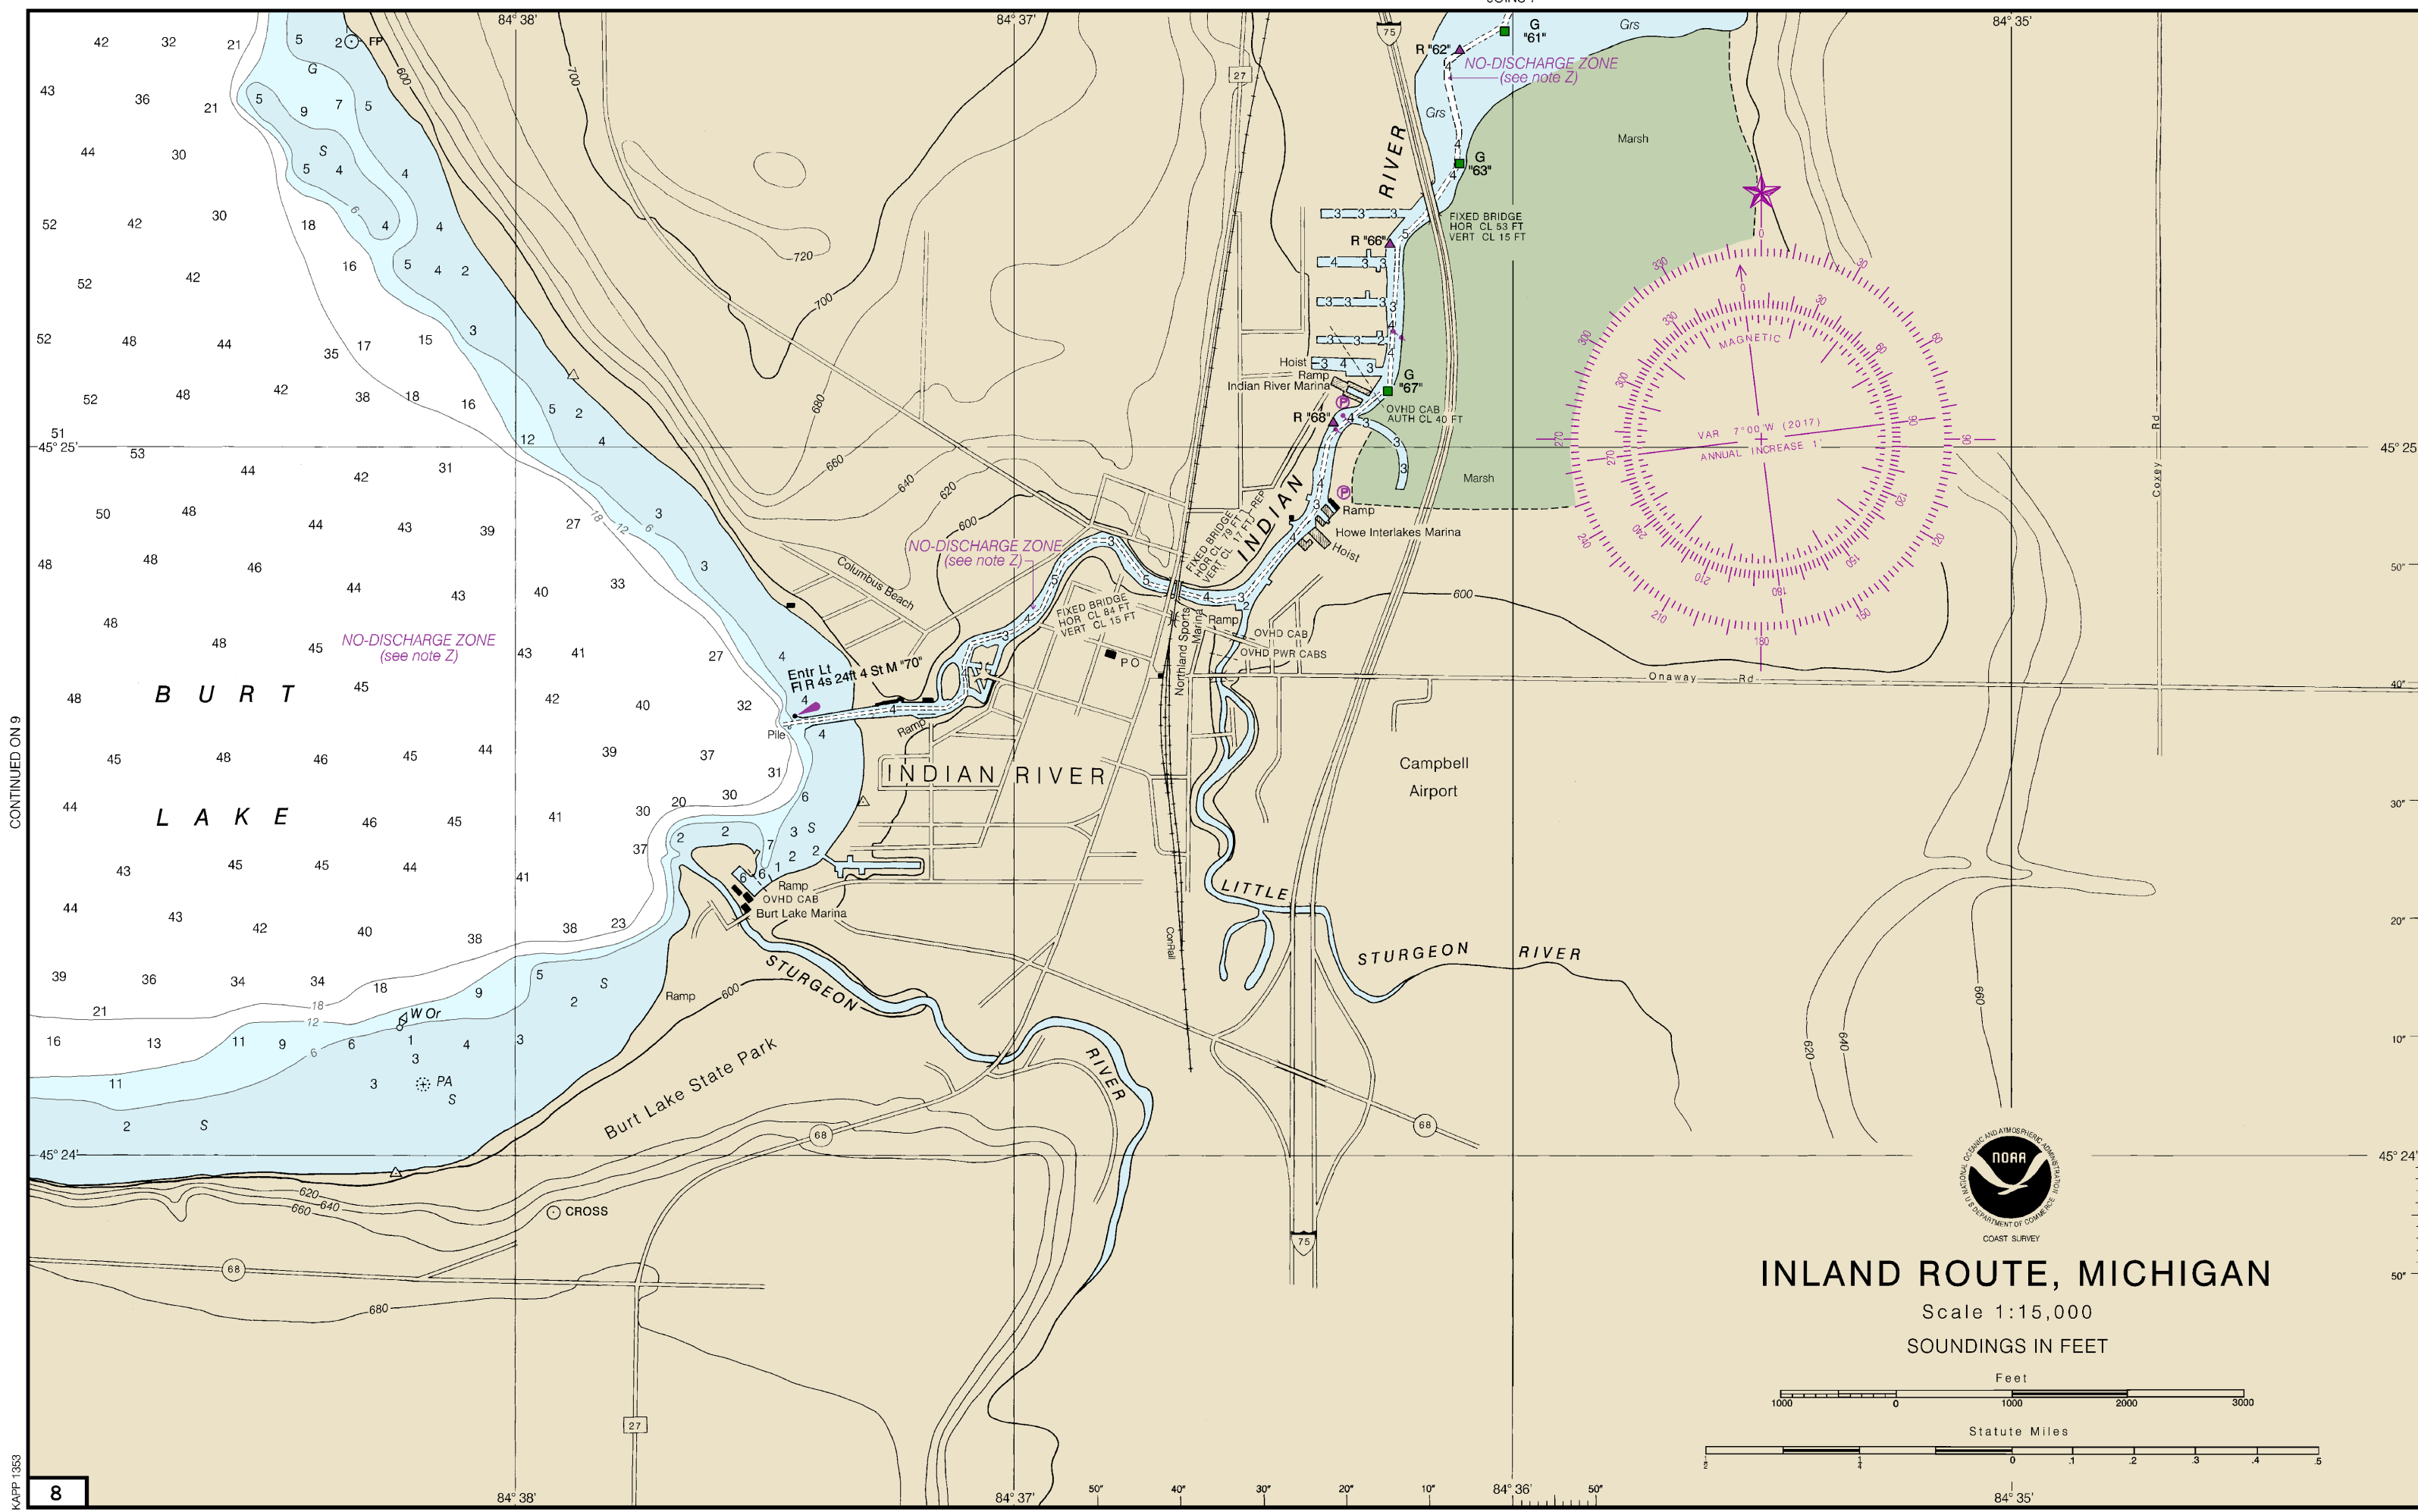

KAPP 1353


8

14886

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.


To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

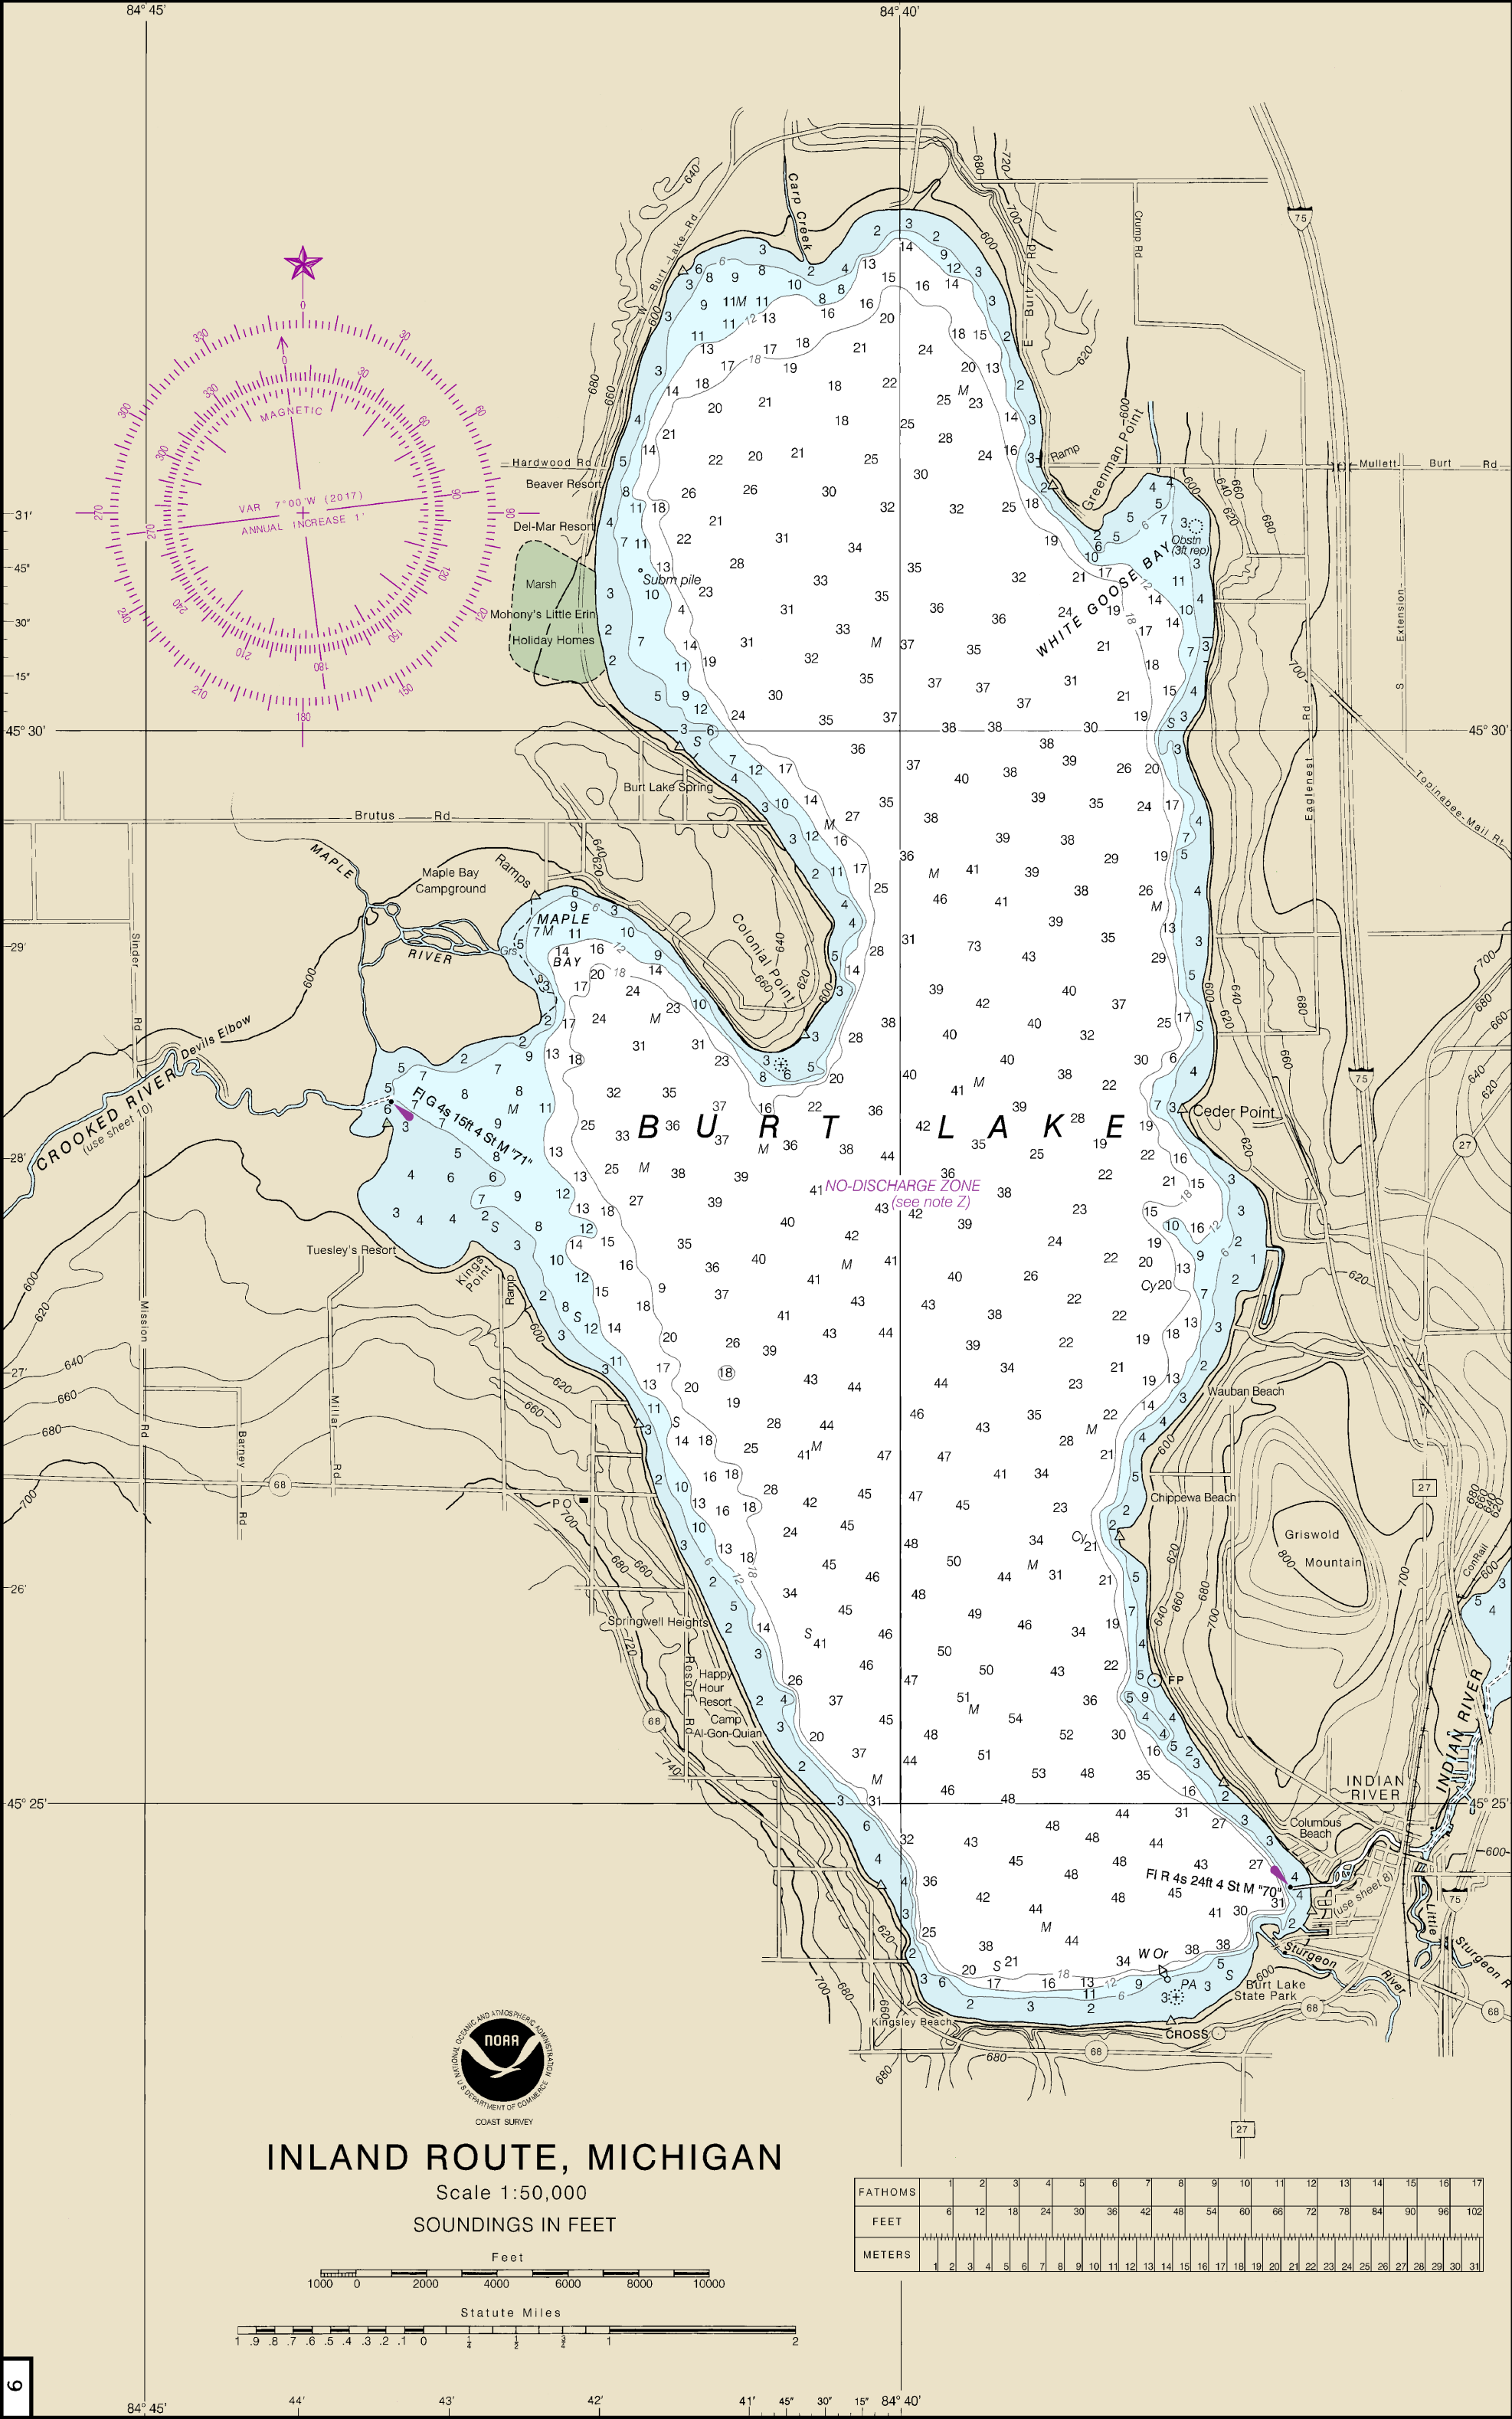

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

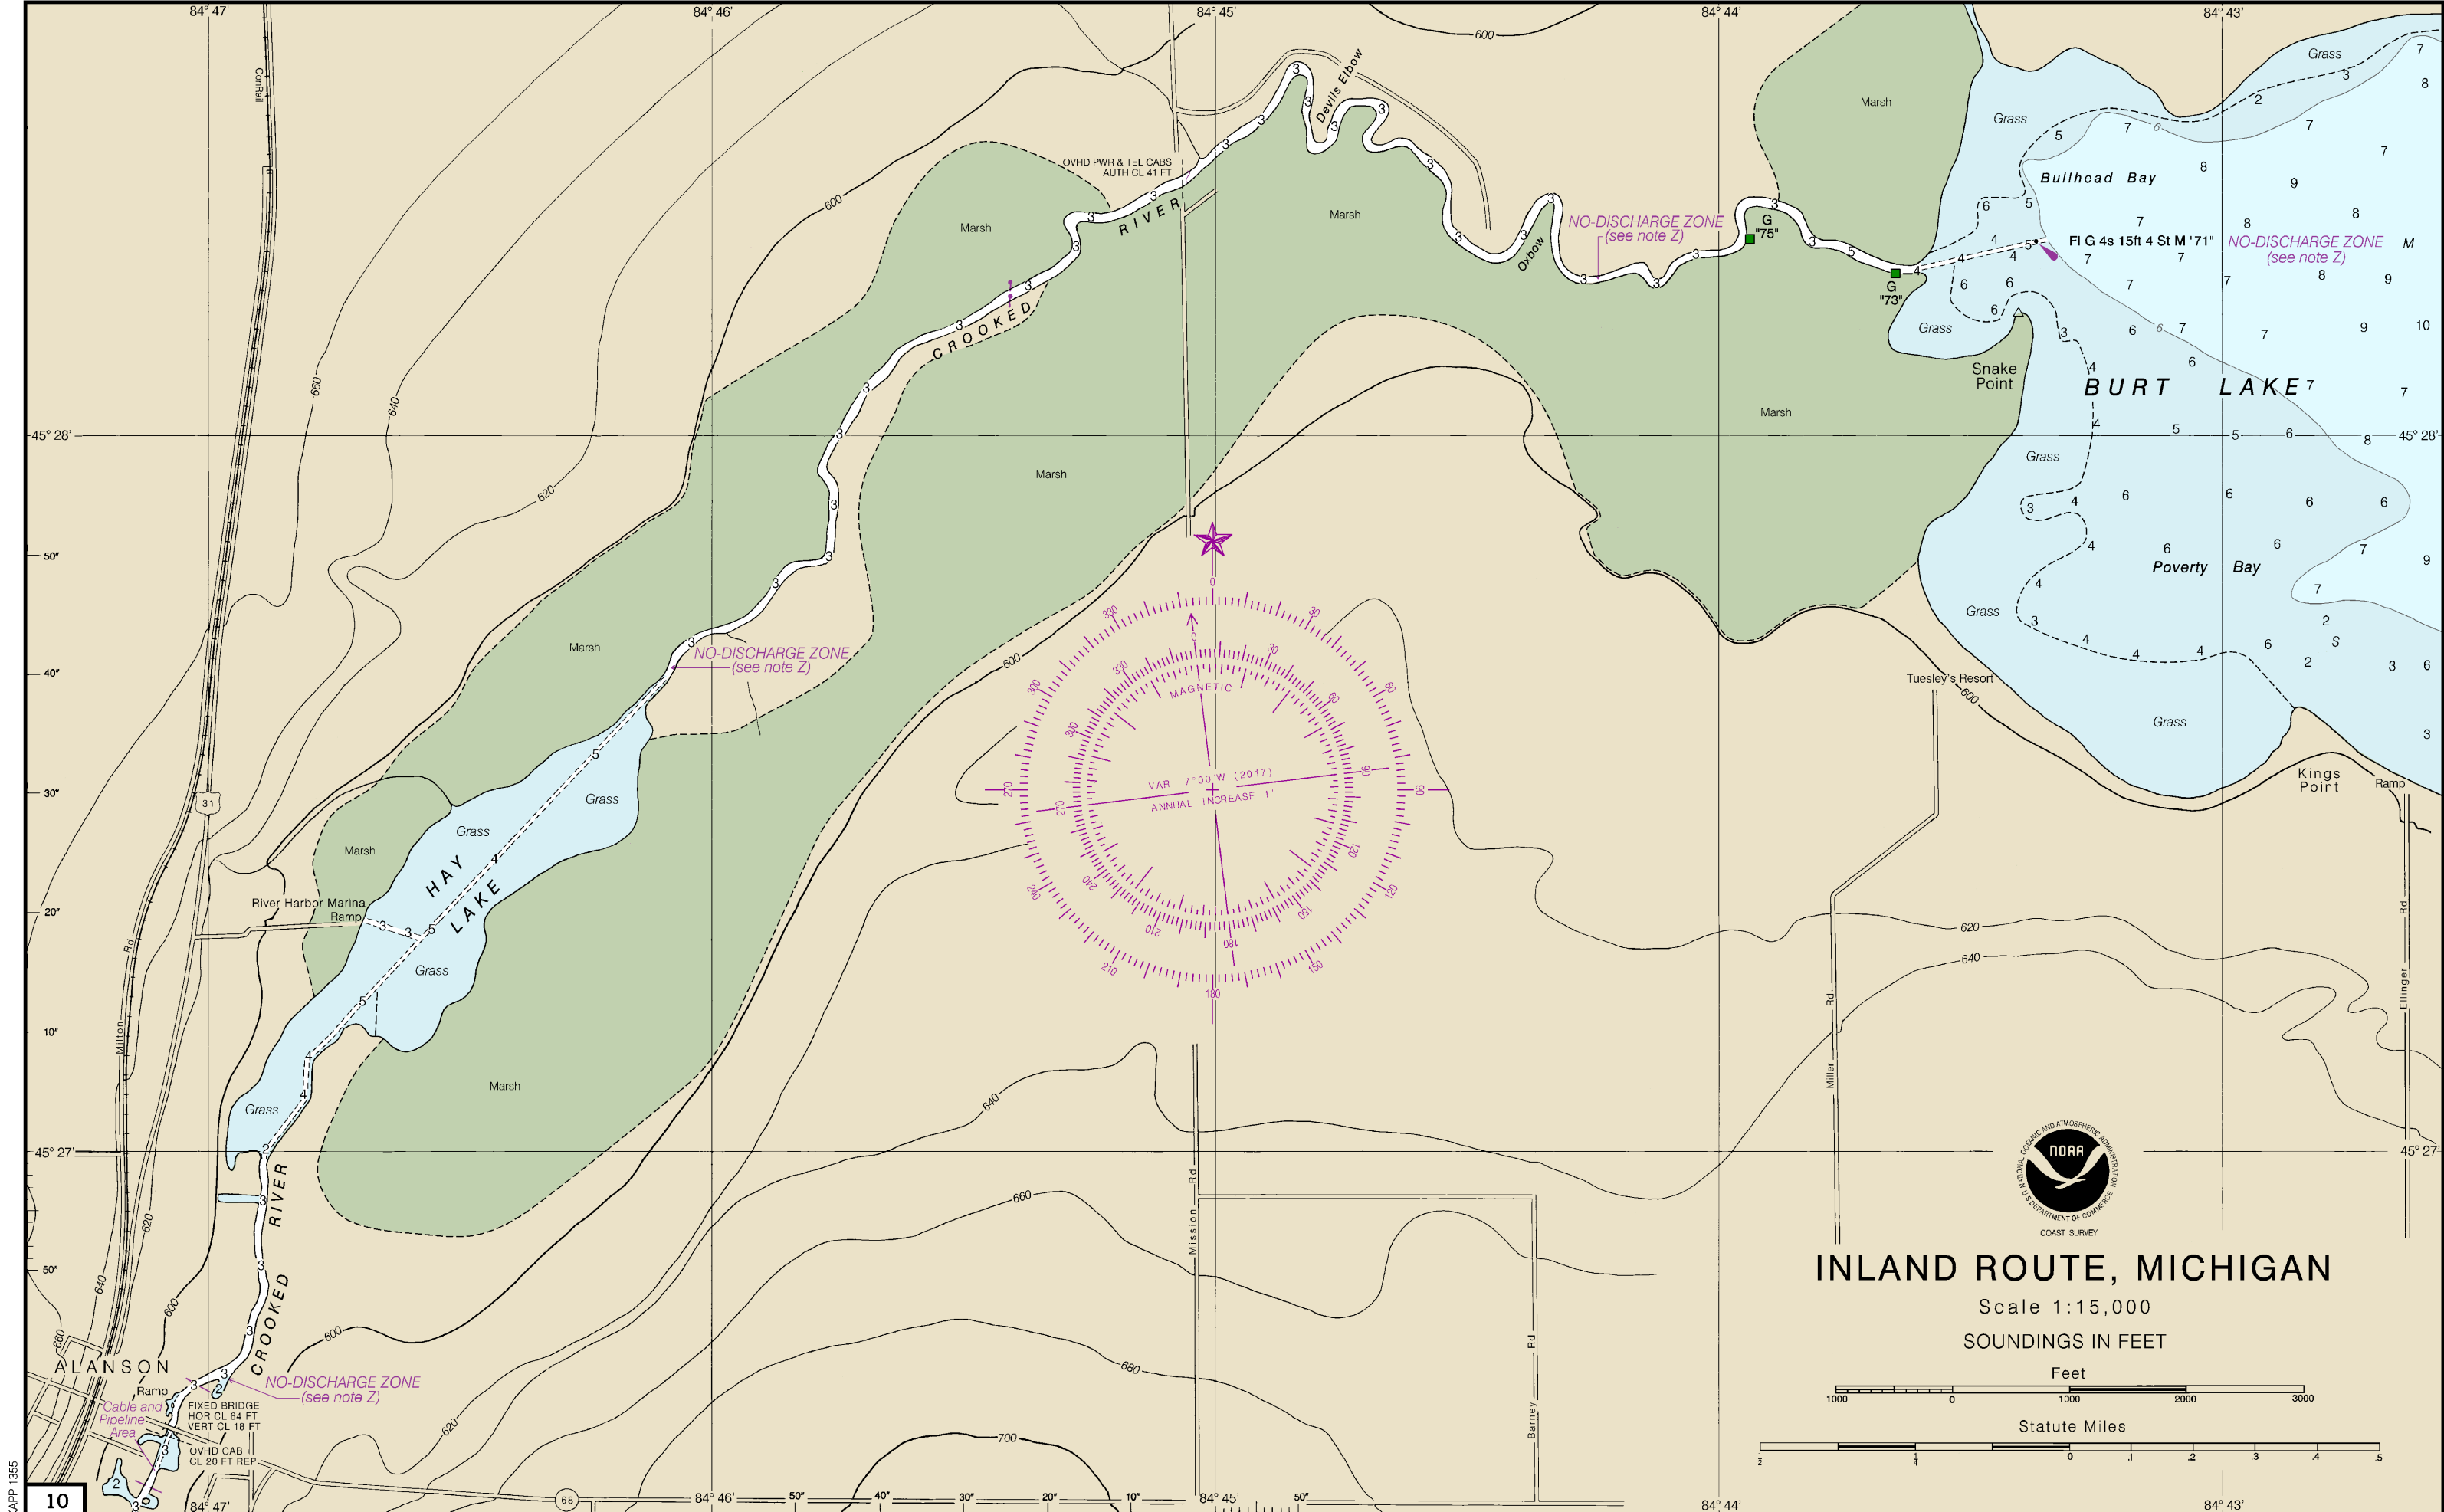

CONTINUED ON 9

KAPP 1355

10


14886

JOINS 11

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.


To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

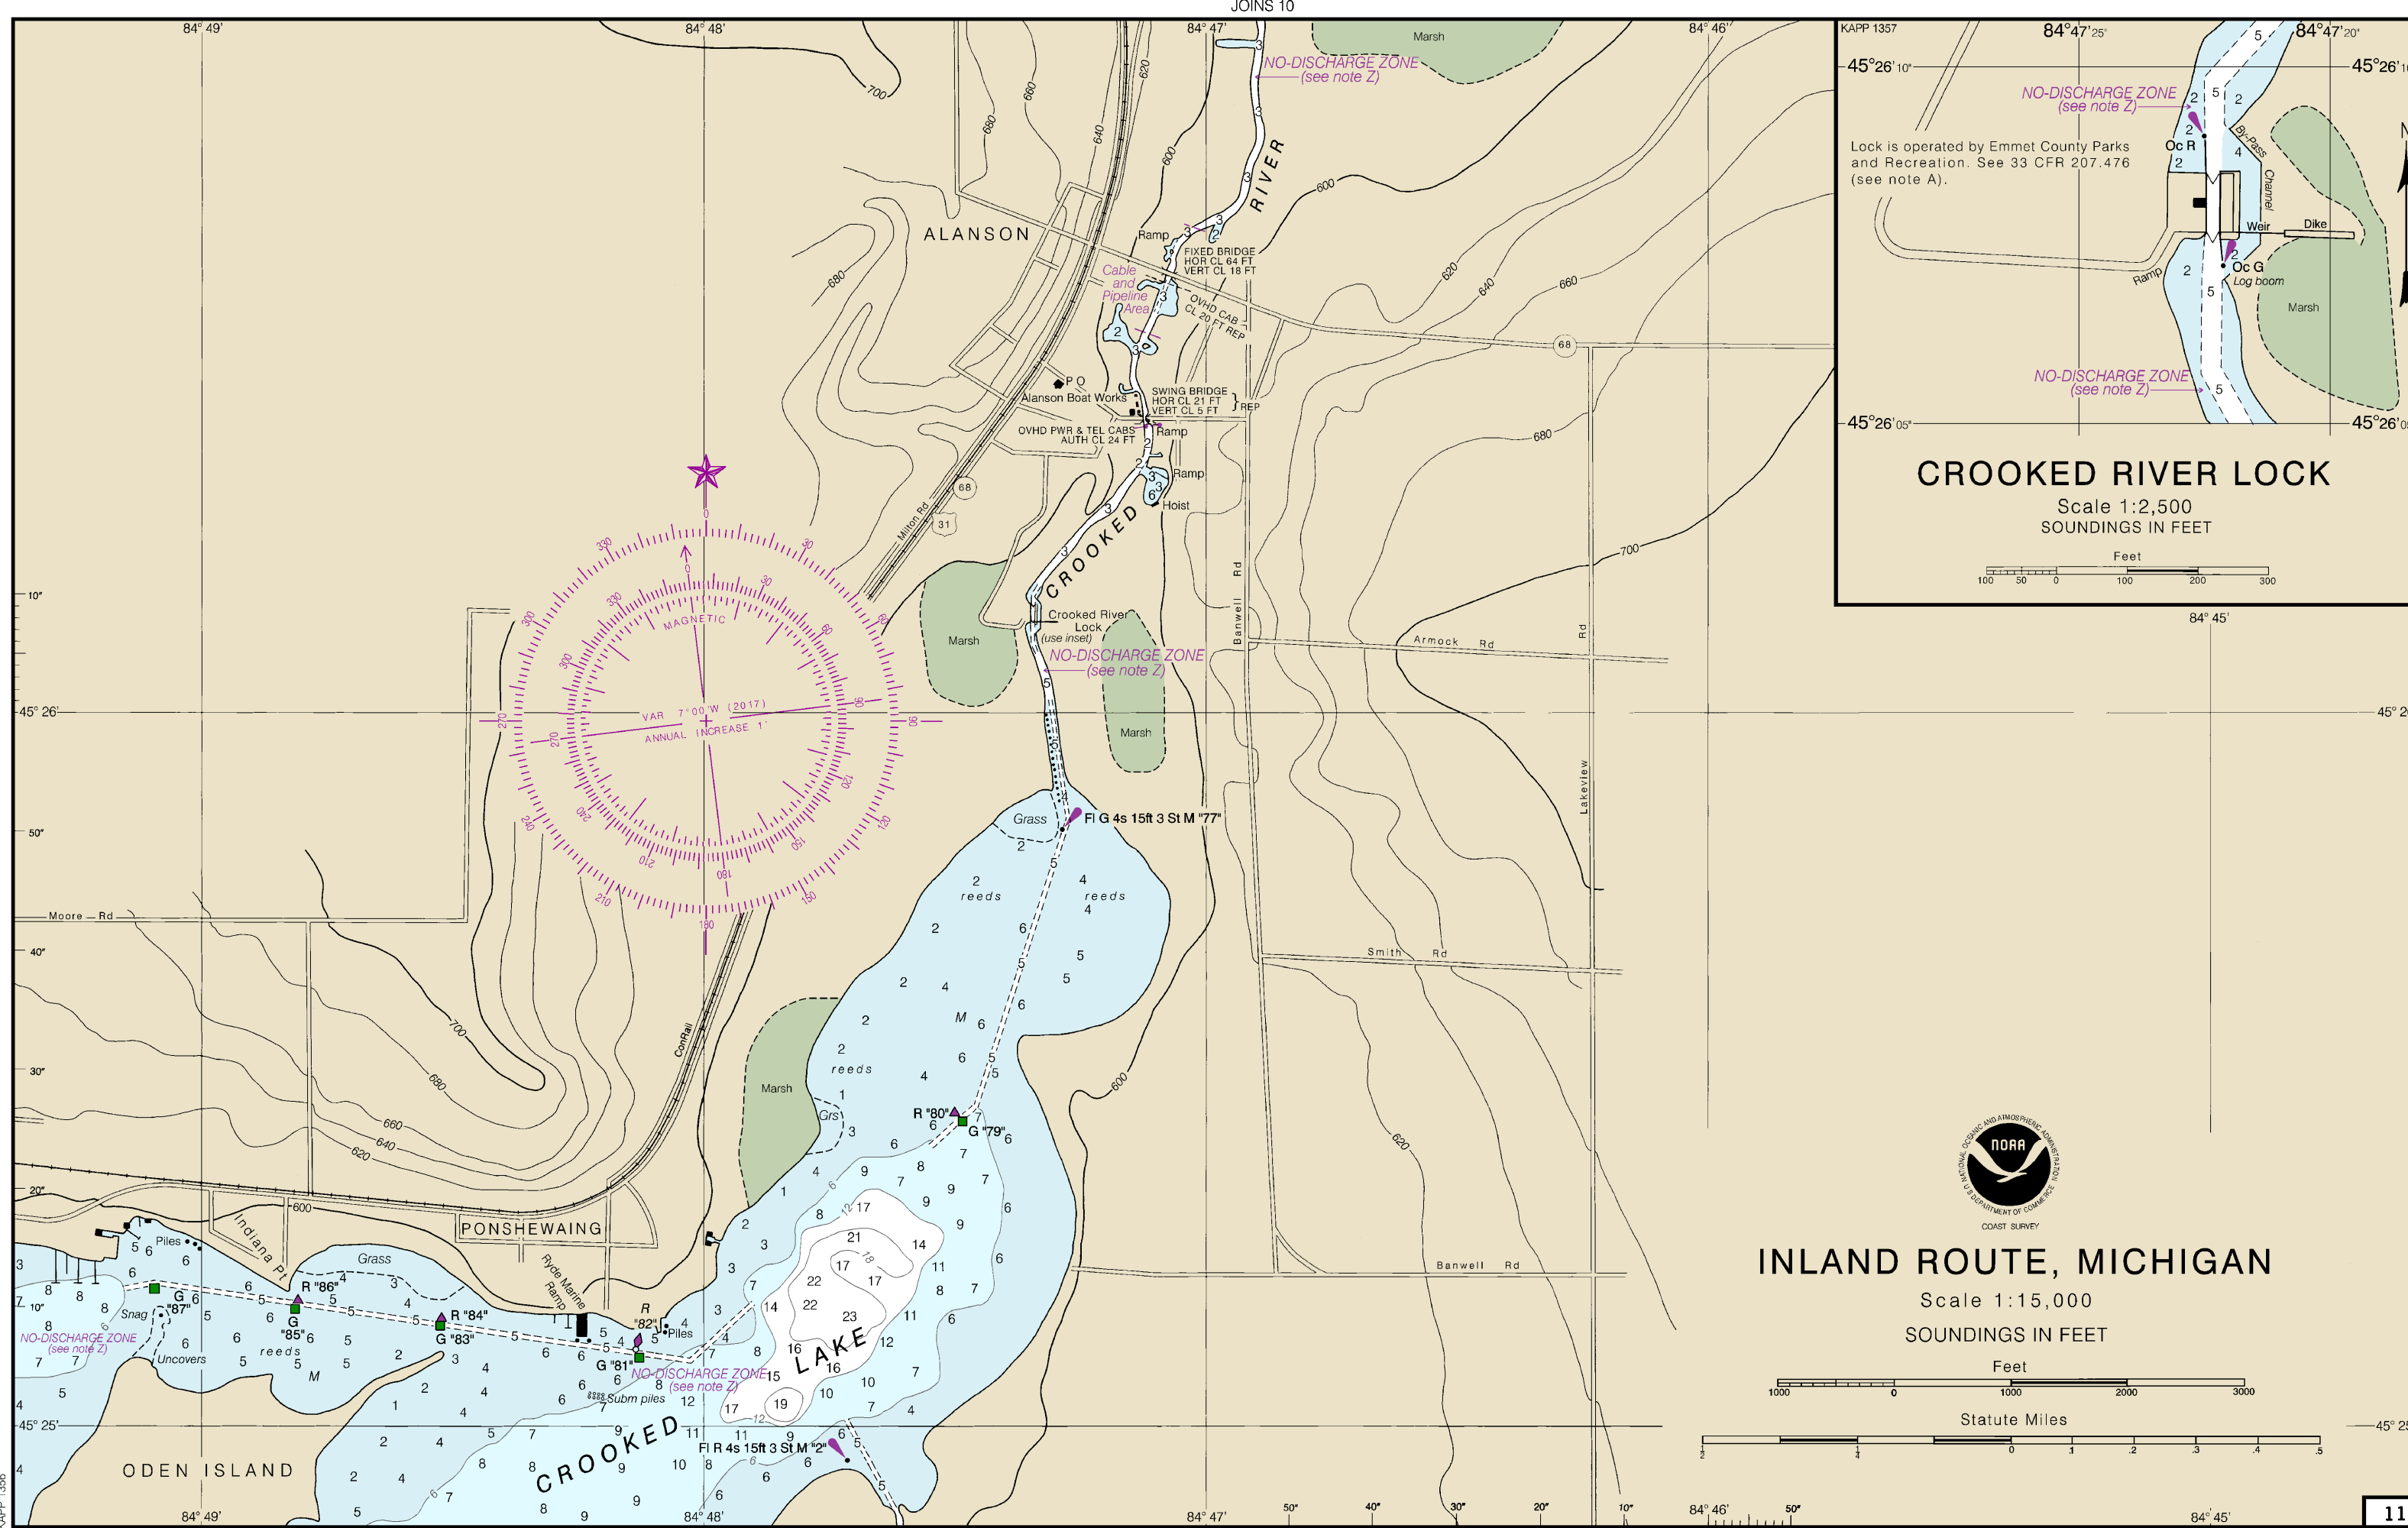

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).

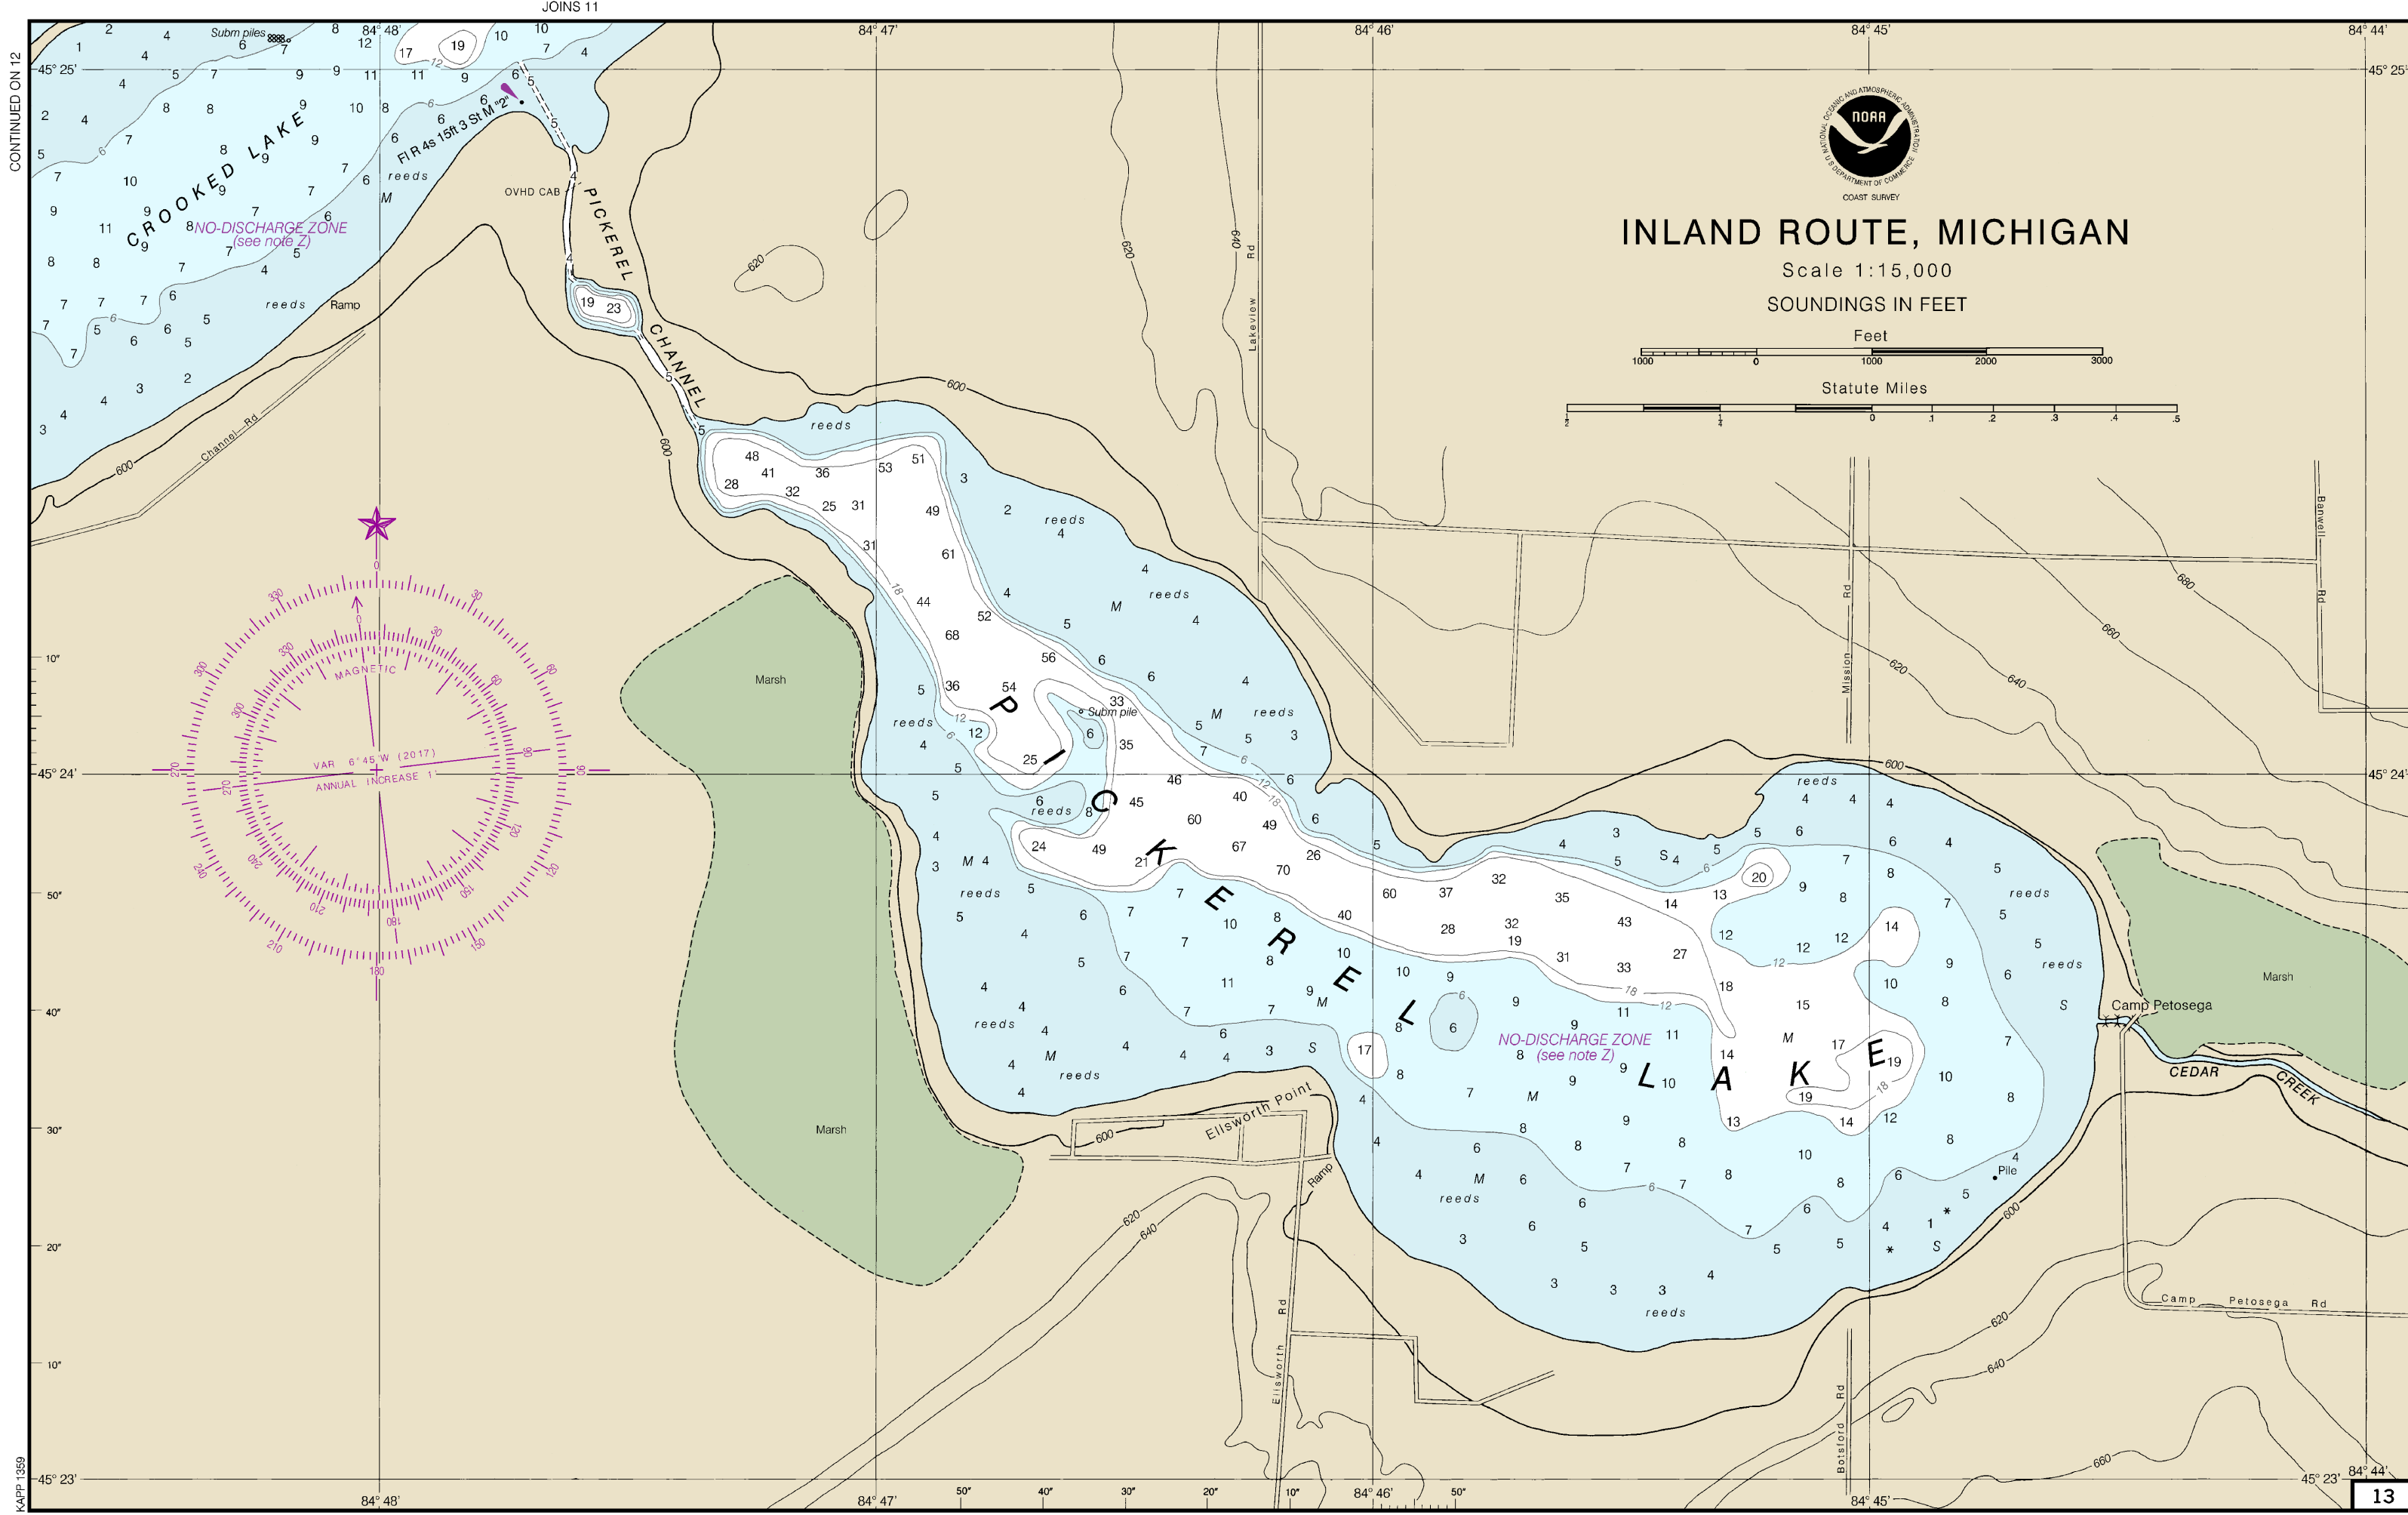

14886

13

13th Ed., Sep. 2017. Last Correction: 10/31/2022. Cleared through:
LNM: 1623 (4/18/2023), NM: 1723 (4/29/2023), CHS: 0323 (3/31/2023)

This chart is canceled. No new editions will be issued.

To ensure that this chart was printed at the proper scale, the line below should measure six inches (152 millimeters).