This nautical chart has been designed to promote safe navigation. The National Ocean Service encourages users to submit corrections, additions, or comments for improving this chart to the Chief, Marine Chart Division (N/CS2), National Ocean Service, NOAA, Silver Spring, Maryland 20910-3282.

SCALE 1:40,000

Formerly C&GS 6265 1st Ed., June 1892 C-1933-395 KAPP 1729

PRINT-ON-DEMAND CHARTS

NOAA and its partner, OceanGrafix, offer this chart updated weekly by NOAA for Notices to Mariners and critical corrections. Charts are printed when ordered using Print-on-Demand technology. New Editions are available 2-8 weeks before their release as traditional NOAA charts. Ask your chart agent about Print-on-Demand charts or contact NOAA at http://ocsdata.ncd.noaa.gov/idrs/inquiry.aspx, or OceanGrafix at 1-877-56CHART or http://www.oceangrafix.com.

SOUNDINGS IN FATHOMS

(FATHOMS AND FEET TO 11 FATHOMS)

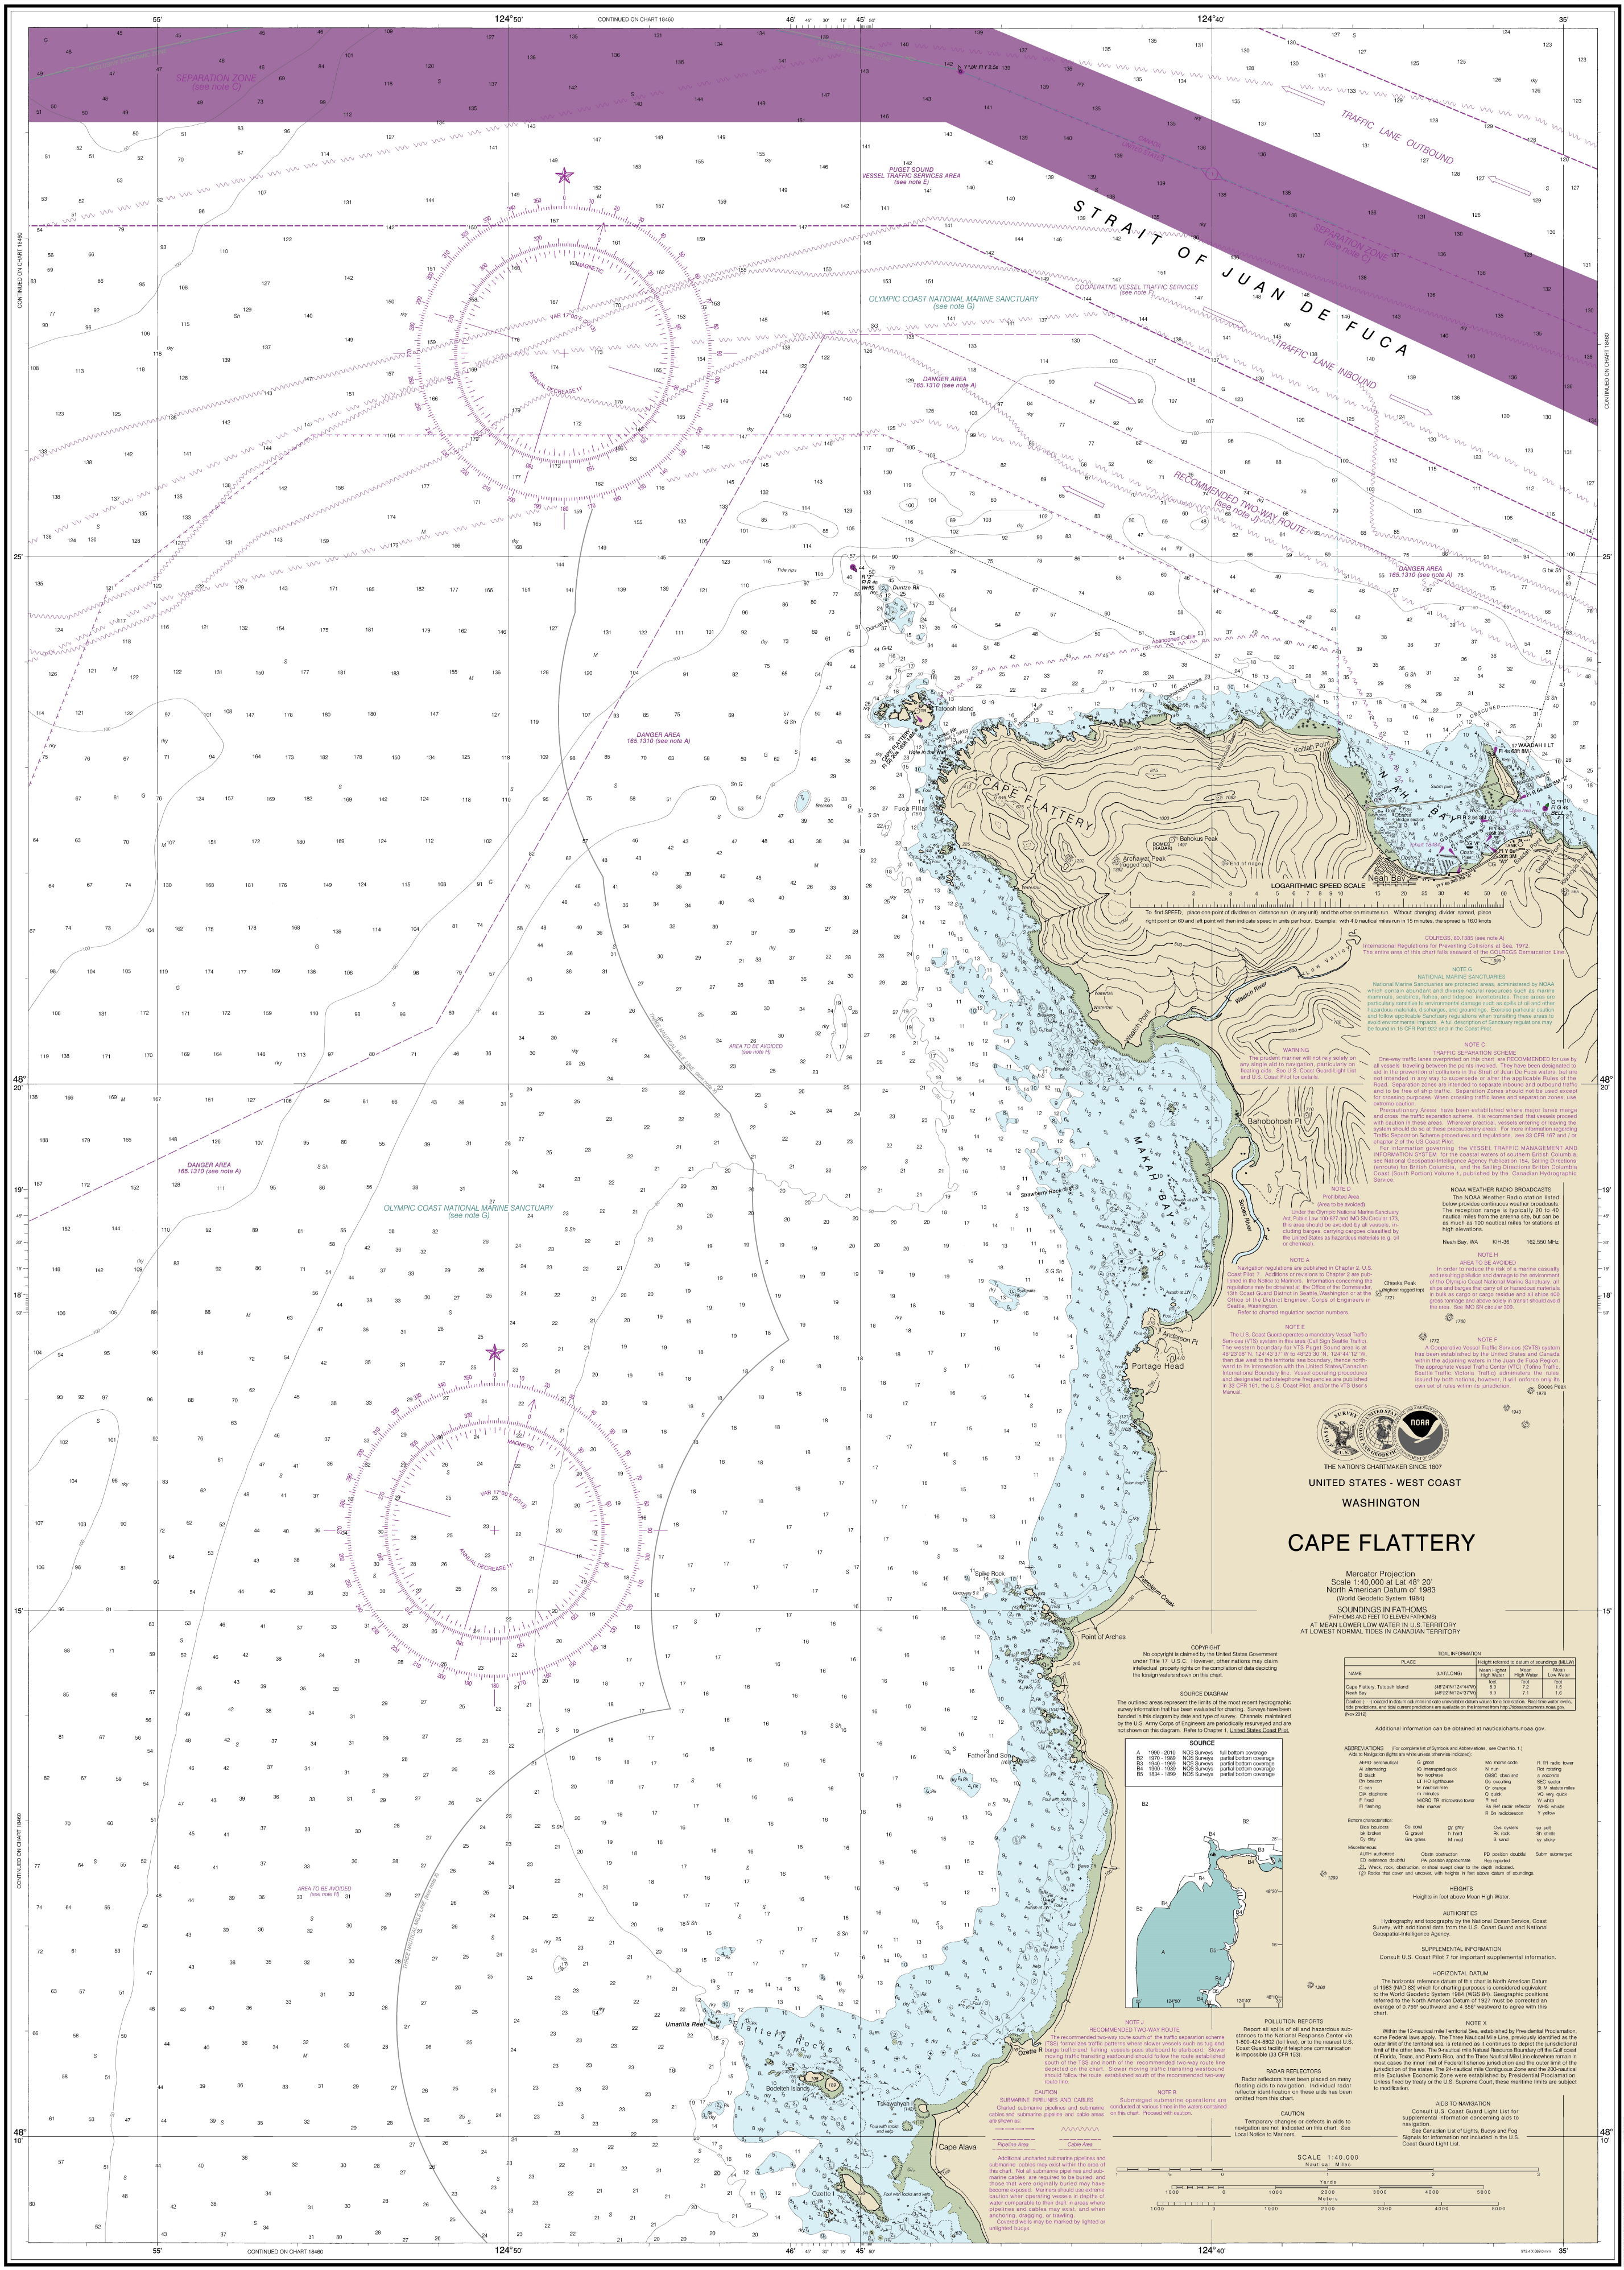

LOGARITHMIC SPEED SCALE

To find SPEED, place one point of dividers on distance run (in any unit) and the other on minutes run. Without changing divider spread, place right point on 60 and left point will then indicate speed in units per hour. Example: with 4.0 nautical miles run in 15 minutes, the spread is 16.0 knots

COLREGS, 80.1385 (see note A)

International Regulations for Preventing Collisions at Sea, 1972.
The entire area of this chart falls seaward of the COLREGS Demarcation Line.

NOTE G
NATIONAL MARINE SANCTUARIES

National Marine Sanctuaries are protected areas, administered by NOAA which contain abundant and diverse natural resources such as marine mammals, seabirds, fishes, and tidepool invertebrates. These areas are particularly sensitive to environmental damage such as spills of oil and other hazardous materials, discharges, and groundings. Exercise particular caution and follow applicable Sanctuary regulations when transiting these areas to avoid environmental impacts. A full description of Sanctuary regulations may be found in 15 CFR Part 922 and in the Coast Pilot.

WARNING

The prudent mariner will not rely solely on any single aid to navigation, particularly on floating aids. See U.S. Coast Guard Light List and U.S. Coast Pilot for details.

NOTE C
TRAFFIC SEPARATION SCHEME

One-way traffic lanes overprinted on this chart are RECOMMENDED for use by all vessels traveling between the points involved. They have been designated to aid in the prevention of collisions in the Strait of Juan De Fuca waters, but are not intended in any way to supersede or alter the applicable Rules of the Road. Separation zones are intended to separate inbound and outbound traffic and to be free of ship traffic. Separation Zones should not be used except for crossing purposes. When crossing traffic lanes and separation zones, use extreme caution.

Precautionary Areas have been established where major lanes merge and cross the traffic separation scheme. It is recommended that vessels proceed with caution in these areas. Wherever practical, vessels entering or leaving the system should do so at these precautionary areas. For more information regarding Traffic Separation Scheme procedures and regulations, see 33 CFR 167 and / or chapter 2 of the US Coast Pilot.

For information governing the VESSEL TRAFFIC MANAGEMENT AND INFORMATION SYSTEM for the coastal waters of southern British Columbia, see National Geospatial-Intelligence Agency Publication 154, Sailing Directions (enroute) for British Columbia, and the Sailing Directions British Columbia Coast (South Portion) Volume 1, published by the Canadian Hydrographic Service.

NOTE D
Prohibited Area
(Area to be avoided)

Under the Olympic National Marine Sanctuary Act, Public Law 100-627 and IMO SN Circular 173, this area should be avoided by all vessels, including barges, carrying cargoes classified by the United States as hazardous materials (e.g. oil or chemical).

NOAA WEATHER RADIO BROADCASTS

The NOAA Weather Radio station listed below provides continuous weather broadcasts. The reception range is typically 20 to 40 nautical miles from the antenna site, but can be as much as 100 nautical miles for stations at high elevations.

Neah Bay, WA	KIH-36	162.550 MHz

NOTE A

Navigation regulations are published in Chapter 2, U.S. Coast Pilot 7. Additions or revisions to Chapter 2 are published in the Notice to Mariners. Information concerning the regulations may be obtained at the Office of the Commander, 13th Coast Guard District in Seattle, Washington or at the Office of the District Engineer, Corps of Engineers in Seattle, Washington.

Refer to charted regulation section numbers.

NOTE H
AREA TO BE AVOIDED

In order to reduce the risk of a marine casualty and resulting pollution and damage to the environment of the Olympic Coast National Marine Sanctuary, all ships and barges that carry oil or hazardous materials in bulk as cargo or cargo residue and all ships 400 gross tonnage and above solely in transit should avoid the area. See IMO SN circular 309.

NOTE E

The U.S. Coast Guard operates a mandatory Vessel Traffic Services (VTS) system in this area (Call Sign Seattle Traffic). The western boundary for VTS Puget Sound area is at 48°23'08''N, 124°43'37''W to 48°23'30''N, 124°44'12''W, then due west to the territorial sea boundary, thence northward to its intersection with the United States/Canadian International Boundary line. Vessel operating procedures and designated radiotelephone frequencies are published in 33 CFR 161, the U.S. Coast Pilot, and/or the VTS User's Manual.

NOTE F

A Cooperative Vessel Traffic Services (CVTS) system has been established by the United States and Canada within the adjoining waters in the Juan de Fuca Region. The appropriate Vessel Traffic Center (VTC) (Tofino Traffic, Seattle Traffic, Victoria Traffic) administers the rules issued by both nations, however, it will enforce only its own set of rules within its jurisdiction.

THE NATION'S CHARTMAKER SINCE 1807

UNITED STATES - WEST COAST

WASHINGTON

CAPE FLATTERY

Mercator Projection
Scale 1:40,000 at Lat 48° 20'
North American Datum of 1983
(World Geodetic System 1984)

SOUNDINGS IN FATHOMS
(FATHOMS AND FEET TO ELEVEN FATHOMS)
AT MEAN LOWER LOW WATER IN U.S.TERRITORY
AT LOWEST NORMAL TIDES IN CANADIAN TERRITORY

COPYRIGHT

No copyright is claimed by the United States Government under Title 17 U.S.C. However, other nations may claim intellectual property rights on the compilation of data depicting the foreign waters shown on this chart.

SOURCE DIAGRAM

The outlined areas represent the limits of the most recent hydrographic survey information that has been evaluated for charting. Surveys have been banded in this diagram by date and type of survey. Channels maintained by the U.S. Army Corps of Engineers are periodically resurveyed and are not shown on this diagram. Refer to Chapter 1, United States Coast Pilot.

SOURCE

A	1990 - 2010	NOS Surveys	full bottom coverage
B2	1970 - 1989	NOS Surveys	partial bottom coverage
B3	1940 - 1969	NOS Surveys	partial bottom coverage
B4	1900 - 1939	NOS Surveys	partial bottom coverage
B5	1834 - 1899	NOS Surveys	partial bottom coverage

TIDAL INFORMATION

PLACE		Height referred to datum of soundings (MLLW)		
NAME	(LAT/LONG)	Mean Higher High Water	Mean High Water	Mean Low Water
		feet	feet	feet
Cape Flattery, Tatoosh Island	(48°24'N/124°44'W)	8.0	7.2	1.5
Neah Bay	(48°22'N/124°37'W)	8.0	7.1	1.6

Dashes (- - -) located in datum columns indicate unavailable datum values for a tide station. Real-time water levels, tide predictions, and tidal current predictions are available on the Internet from http://tidesandcurrents.noaa.gov.

(Nov 2012)

Additional information can be obtained at nauticalcharts.noaa.gov.

ABBREVIATIONS (For complete list of Symbols and Abbreviations, see Chart No. 1.)

Aids to Navigation (lights are white unless otherwise indicated):

AERO aeronautical
Al alternating
B black
Bn beacon
C can
DIA diaphone
F fixed
Fl flashing
G green
IQ interrupted quick
Iso isophase
LT HO lighthouse
M nautical mile
m minutes
MICRO TR microwave tower
Mkr marker
Mo morse code
N nun
OBSC obscured
Oc occulting
Or orange
Q quick
R red
Ra Ref radar reflector
R Bn radiobeacon
R TR radio tower
Rot rotating
s seconds
SEC sector
St M statute miles
VQ very quick
W white
WHIS whistle
Y yellow

Bottom characteristics:

Blds boulders
bk broken
Cy clay
Co coral
G gravel
Grs grass
gy gray
h hard
M mud
Oys oysters
Rk rock
S sand
so soft
Sh shells
sy sticky

Miscellaneous:

AUTH authorized
ED existence doubtful
Obstn obstruction
PA position approximate
PD position doubtful
Rep reported
Subm submerged
21 Wreck, rock, obstruction, or shoal swept clear to the depth indicated.
(2) Rocks that cover and uncover, with heights in feet above datum of soundings.

HEIGHTS

Heights in feet above Mean High Water.

AUTHORITIES

Hydrography and topography by the National Ocean Service, Coast Survey, with additional data from the U.S. Coast Guard and National Geospatial-Intelligence Agency.

SUPPLEMENTAL INFORMATION

Consult U.S. Coast Pilot 7 for important supplemental information.

HORIZONTAL DATUM

The horizontal reference datum of this chart is North American Datum of 1983 (NAD 83) which for charting purposes is considered equivalent to the World Geodetic System 1984 (WGS 84). Geographic positions referred to the North American Datum of 1927 must be corrected an average of 0.759" southward and 4.856" westward to agree with this chart.

NOTE J
RECOMMENDED TWO-WAY ROUTE

The recommended two-way route south of the traffic separation scheme (TSS) formalizes traffic patterns where slower vessels such as tug and barge traffic and fishing vessels pass starboard to starboard. Slower moving traffic transiting eastbound should follow the route established south of the TSS and north of the recommended two-way route line depicted on the chart. Slower moving traffic transiting westbound should follow the route established south of the recommended two-way route line.

POLLUTION REPORTS

Report all spills of oil and hazardous substances to the National Response Center via 1-800-424-8802 (toll free), or to the nearest U.S. Coast Guard facility if telephone communication is impossible (33 CFR 153).

NOTE X

Within the 12-nautical mile Territorial Sea, established by Presidential Proclamation, some Federal laws apply. The Three Nautical Mile Line, previously identified as the outer limit of the territorial sea, is retained as it continues to depict the jurisdictional limit of the other laws. The 9-nautical mile Natural Resource Boundary off the Gulf coast of Florida, Texas, and Puerto Rico, and the Three Nautical Mile Line elsewhere remain in most cases the inner limit of Federal fisheries jurisdiction and the outer limit of the jurisdiction of the states. The 24-nautical mile Contiguous Zone and the 200-nautical mile Exclusive Economic Zone were established by Presidential Proclamation. Unless fixed by treaty or the U.S. Supreme Court, these maritime limits are subject to modification.

RADAR REFLECTORS

Radar reflectors have been placed on many floating aids to navigation. Individual radar reflector identification on these aids has been omitted from this chart.

CAUTION
SUBMARINE PIPELINES AND CABLES

Charted submarine pipelines and submarine cables and submarine pipeline and cable areas are shown as:

Pipeline Area
Cable Area

Additional uncharted submarine pipelines and submarine cables may exist within the area of this chart. Not all submarine pipelines and submarine cables are required to be buried, and those that were originally buried may have become exposed. Mariners should use extreme caution when operating vessels in depths of water comparable to their draft in areas where pipelines and cables may exist, and when anchoring, dragging, or trawling.

Covered wells may be marked by lighted or unlighted buoys.

NOTE B

Submerged submarine operations are conducted at various times in the waters contained on this chart. Proceed with caution.

CAUTION

Temporary changes or defects in aids to navigation are not indicated on this chart. See Local Notice to Mariners.

AIDS TO NAVIGATION

Consult U.S. Coast Guard Light List for supplemental information concerning aids to navigation.

See Canadian List of Lights, Buoys and Fog Signals for information not included in the U.S. Coast Guard Light List.

SCALE 1:40,000

973.4 X 689.6 mm

17th Ed., Jan. / 13 ■ Corrected through NM Jan. 05/13
Corrected through LNM Dec. 11/12

18485

CAUTION

This chart has been corrected from the Notice to Mariners (NM) published weekly by the National Geospatial-Intelligence Agency and the Local Notice to Mariners (LNM) issued periodically by each U.S. Coast Guard district to the dates shown in the lower left hand corner. Chart updates corrected from Notice to Mariners published after the dates shown in the lower left hand corner are available at nauticalcharts.noaa.gov.

SOUNDINGS IN FATHOMS
(FATHOMS AND FEET TO 11 FATHOMS)

Published at Washington, D.C.
U.S. DEPARTMENT OF COMMERCE
NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION
NATIONAL OCEAN SERVICE
COAST SURVEY

FATHOMS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
FEET	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102

METERS 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31

Cape Flattery
SOUNDINGS IN FATHOMS - SCALE 1:40,000

ED. NO. 17
NSN 7642014011496
NGA REFERENCE NO. 18ACO18485