


C300

*No SOS function

*Only group calls **without individual calls**, group reports: Channel1 Channel2

*4K8K operation(switching sound quality): Press and hold both the up and down keys simultaneously to switch
Radio reports:"General sound quality"=4K / "Clear sound quality"=8K

1*Frequency writing Step

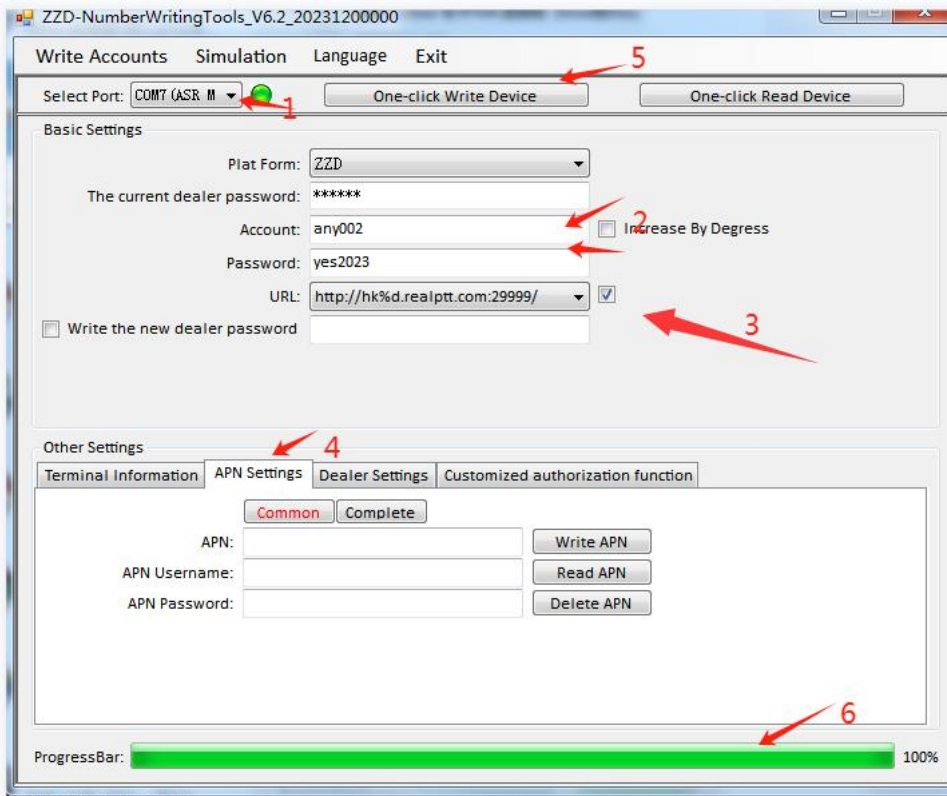

Step1: choose correct COM port,from your PC Device management you can see the port
(if no port, means driver Error,Must install driver to continue)

Step2: Fulfill your REALPTT account and password(REALPTT account cost Yearly fee, please buy from Anysecu. [About 15--50USD/Year/ID,depends on Function](#))

Step3: Choose your location URL(means server location,the nearest the fast communicate) (must √)

Step4: If your SIM card have APN please enter the detail information(from the Sim card provider)

Step5: One-Click Write Device

Step6: wait for Progress Bar 100%, that is all done, enjoy talk.

2*C300 Group selection

Long press the“Up”and “Down”buttons to enter the interface for selecting the “Group Selection”item.